



Commercial Product Line

#### Quality People. Quality Products.



We value our customers and manufacture our garage doors with the highest quality workmanship and raw materials.

Our method is simple. We hire quality people driven to produce quality products. We don't just say it - we do it. Together, we find innovative ways to solve problems and continuously improve while working smarter and safer. Our people take pride in their work and strive to provide the highest quality of product and service day in and day out. That's the Haas Door Difference.

As you read forward, allow us to open a door to endless possibilities for you!

haasdoor.com



All U-Factors shown are based on testing solid doors. Adding lites will affect the tested U-Factor.

More info on page 36-37.



Create your garage door, view it on your building and receive a quote at haascreate.com.

#### CONTENTS

American Tradition <sup>TM</sup> 9000 Series 9200 - 25%" thick / 0.081 Tested U-Factor 9600 - 2" thick / 0.096 Tested U-Factor	p 2-5
Commercial Aluminum Series CA-320 - 1¾" thick CA-315 - 1¾" thick CA-110 - 1¾" thick	p 6-9
5000 Series 5800 - 3" thick / 0.089 Tested U-Factor 5200 - 2" thick / 0.110 Tested U-Factor 5700 - 1¾" thick / 0.097 Tested U-Factor	p 10-13
800 Series 3" thick / 0.089 Tested U-Factor	p 14-17
2000 Series 2" thick / 0.094 Tested U-Factor	p 18-21
700 Series 1¾" thick/0.093 Tested U-Factor	p 22-25
600 Series 13%" thick / 0.106 Tested U-Factor	p 26-29
2400 Series & Smooth Ribbed Steel 2" thick / Optional Insulation	p 30-33
Insulated Product Details	p 34-35
Thermal Performance U-Factor	p 36-37
Warranty Information	p 38
Glass Options	p 39
SelectView Options	p 40-41
Window Options	p 42-44
Color Options	p 45-47
Quality & Environmental	



























Commitment





p 48-49







## COMMERCIAL 9000 SERIES

25/8" or 2" Thick



9200 - 2" base door & 5/8" overlay 9600 - 13/8" base door & 5/8" overlay

#### Timeless Beauty.

#### **Door Design Options**



or

plain or arch top sections.



Most designs are available with

Most designs are available inverted.

or



All models shown are available with multiple style options: 9200 & 9600 models, flush or v-groove base panel option, and single or double door designs. Most models are available with plain

or arch top sections. Some designs can be inverted to match

other features on the home. See the best option directly on your home by using our online visualizer at haascreate.com.

9230/9630 Arch 9231/9631 Arch



Available in flush or v-groove base panels.



Available in single or double door designs.

















9210/9610 Arch 9211/9611 Arch 9212/9612 Arch







9223/9623 Plain 9224/9624 Plain 9225/9625 Plain 9226/9626 Plain 9240/9640 Plain 9241/9641 Plain 9242/9642 Plain 9233/9633 Arch







9250/9650 Arch 9251/9651 Arch 9252/9652 Arch



9243/9643 Plain 9244/9644 Plain 9260/9660 Plain 9261/9661 Plain 9262/9662 Plain 9280/9680 Plain 9281/9681 Plain 9253/9653 Arch

9254/9654 Arch

9270/9670 Arch 9271/9671 Arch 9272/9672 Arch 9290/9690 Arch 9291/9691 Arch



9282/9682 Plain 9289/9689 Plain

9292/9692 Arch 9299/9699 Arch

#### Solid Base & Overlay Colors All color combinations are available to mix and match base and overlay colors.



- \*Trinar® colors on steel sections carry a 35-year finish warranty. Trinar® overlay colors are color matched to the steel sections but do not contain the Trinar® additive, therefore fall under standard 5 year overlay warranty.
- \*\*These colors include a cool chemistry paint finish on the base door and are not recommended for projects with extreme exposures to heat and sunlight.

Due to the printing process, colors may vary. For an accurate color match, contact your Haas Door dealer.

#### Wood Grain Base & Overlay Colors Wood grain overlays are handcrafted and can vary slightly in color like real wood.










Window Designs Windows available in top 2 sections

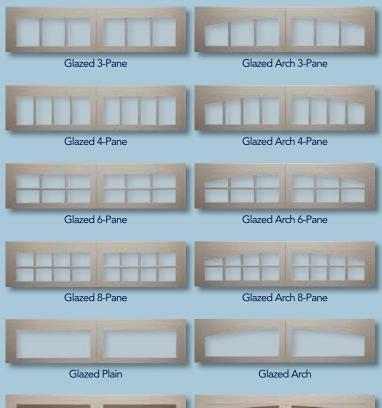











Double Doors available in single or double arch

#### 9000 Series **Available Options**

2" or 3" Track Exhaust Port(s) Cam Safety Device Spring Bumpers Chain Hoist Operators High Cycle Springs Glazing (lites) High Cycle Rollers Keyed Lock Wind Load & Impact







A **Full Thermal Break** is used in the tongue-and-groove construction of all 9000 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.

9200 series doors include Air Infiltration Seals, which exceed the ASHRAE 90.1 Standard when installed with standard bottom seal and commonly available rigid/flexible vinyl door stop.

#### 9000 QUICK GUIDE

	Model		Tested	Max. Door Size		Section Skins		
			U-Factor	Width	Height	Inside	Outside	
<b>*</b>	9200 models	2 <sup>5</sup> /8" (66.7mm)	0.081	20'-2"	16'-0"	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel	
<b>*</b>	9600 models	2" (50.8mm)	0.096	18'-2"	16′-0″	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel	







#### COMMERCIAL ALUMINUM SERIES

13/4" Thick

CA-320 / CA-315 / CA-110

#### Clean Lines.

Haas CA-320, CA-315 and CA-110
Aluminum Sectional Doors are strong,
durable, and elegant. A versatile product
combining aluminum rails and stiles
provides a strong-profiled frame structure
with aluminum panels and a wide range
of glazing choices. This is the ideal
application for service stations, quick
lube facilities, automobile dealerships,
restaurants and other business where
strength, appearance and corrosion
resistance are key factors.



#### **Insulated Option**



#### Commerical Aluminum QUICK GUIDE

		• • •									_						
Model	Giazing	Max. Door Siz Width Heigh		IVIGA	Top Rail	Center Stile	Meeting Rail	Bottom Rail	Color Options	Section Joint	Panel & Glazing Types						
CA-110	1/8"	16'-2"	14'-0"	226 Sq Ft	3" Standard; Upgradeable to 4" or 6"	ogradeable 1"		Jpgradeable 1"		3" Standard up to 13' 2" wide; then 4" Standard; Upgradeable to 4" or 6"	Clear Anodized, Black Anodized, Dark Bronze	Shiplap with Bulb Seal	Polystyrene & Aluminum Laminated Panels Various Types				
CA-110i *	1/4" & 1/2"	12'-2"	10'-0"	102 Sq Ft				3" Standard Upgradeable to 4" or 6"	Anodized & Polar White		& Thicknesses of Glazing						
CA-315	1/8"	16'-2"	16'-0"		Sq	Sq	Sq	Sq	Sq	Sq	4" Standard; Upgradeable	1"	4"	4" Standard Upgradeable to 6"	Anodized & Painted Colors (no Wood	Tongue & Groove with Bulb Seal meets	Polystyrene & Aluminum Laminated Panels Various Types
CA-315i *	1/4" & 1/2"			ΓĹ	Ft to 6"			100	Grains)	IECC air infiltration reqmts	& Thicknesses of Glazing						
CA-320	1/8"	28'-2"	20'-0"		4" Standard			4" Standard up to 16' 2" wide; then 6" Standard; Upgradeable to 6"		Tongue & Groove with Bulb Seal meets IECC air	Polystyrene & Aluminum Laminated						
CA-320i *	1/4"	20'-2"	16′-0″	500 Sq Ft	up to 16'2" wide; then 6" Standard;	0#	4"				Panels Various Types						
CA-320ix **	& 1/2"	20-2	16-0		Upgradeable to 6"	2"					& Thicknesses of Glazing						
CA-320i Impact*	1/4"	16'-2"	16′-0″	258 Sq Ft	6" Standard			6" Standard		infiltration reqmts	Various Glazings, No Solid Panels						

- \*- The i on the series name indicates it is a heavier glass/glazing option 1/4" or 1/2".
- \*\* The x on the series name indicates rails and stiles are insulated with polystyrene.

# ( \( \) CA Available Options

#### 2" or 3" Track High Cycle Rollers

Exhaust Port(s) Chain Hoist Cam Safety Device Operators Spring Bumpers Top Header Seal High Cycle Springs Car Wash Cutout

Insulated Rails and Stiles (320ix only)

Pass Door (320 & 320i only)

#### Pass Door (exterior view)



(Only available on CA-320/CA-320i in all colors options, except wood grains Door trim color is only available in clear anodized. Convenience only, not a legal exit, or ADA compliant.)

#### **Optional Exhaust Port** (interior view)



#### **CA-110 Narrow Line Frame**

The CA-110 and CA-110i sections are assembled using .045" minimum aluminum alloy tubular type extrusions with thru-bolt construction. Sections are 1-3/4" thick. Any Section height is available. Shiplap section joints with bulb seal. Bottom rails are 3" on doors up to 13'-2" wide. Doors greater than 13'-2" wide have 4" bottom rails. Top and bottom rails are upgradeable to 4" or 6".

CA-110i at 8'3" wide and wider and CA-110 at 12'3" and wider, have built-in struts on each section. Dependent on the width size, E struts or cap struts may

be included. All aluminum is clear anodized as standard. Panels for solid sections are .040" stucco embossed or .050" smooth aluminum. A wide variety of glazing materials are available.

#### CA-315 Larger Glass with Heavy **Duty Outer Frame**

The CA-315 & CA-315i sections are assembled using .045" minimum aluminum alloy tubular type extrusions with thru-bolt construction. Sections are 1-3/4" thick. Any section height is available. Tongue & Groove section joints with bulb seal meets IECC Air Infiltration requirements. Bottom rails, top rails, and end stiles are 4". Top and bottom rails are upgradeable to 6".

CA-315i at 8'3" and CA-315 at 12'3" and wider, have built-in struts on each section. Dependent on the width size,

E struts or cap struts may be included. All aluminum is clear anodized as standard. Panels for solid sections are .040" stucco embossed or .050" smooth aluminum. A wide variety of glazing materials are available.

#### CA-320 Heavy Duty Frame

CA-320, CA-320i and CA-320ix sections are assembled using .045" minimum aluminum alloy tubular type extrusions with thru-bolt construction. Sections are 1-3/4" thick. Any section height is available. Tongue & Groove section joints with bulb seal meets IECC Air Infiltration requirements. Bottom rails, top rails, and end stiles are 4" up to 16'2" wide, then change to 6". Top and bottom rails are upgradeable to 6".

CA-320i at 8'3" and wider, and the CA-320 at 12'3" and wider, have built-in struts on each section. Dependent on the

width, E struts, cap struts, and support braces may be included. All aluminum is clear anodized as standard. Panels for solid sections are .040" stucco embossed or .050" smooth aluminum. A wide variety of glazing materials are available. Optional insulated rails and stiles add thermal performance.

#### **Powder Coated Wood Grain**



**Knotty Pine** 


Colony Maple

European Cherry

Antique Cherry

Heritage Maple

National Oak



Dark Bronze Anodized

Black Anodized



Polar White

Sahara Tan

Sandstone

Brown

Painted Bronze

Gray

Charcoal



Custom-matched color and powder coating are also available. Matching solid panels also available for all colors. Not all colors are available for all models, see Quick Guide on page 8. Due to the printing process, colors may vary. For an accurate color match, contact your Haas Door dealer.

Standard **Anodized** Colors Clear Anodized Almond Espresso

Coffee

Cherry with Flame

National Cherry



Black Walnut





#### COMMERCIAL 5000 SERIES

3", 2" or 1<sup>3</sup>/<sub>4</sub>" Thick



5814 / 5816 / 5870 / 5880 5210 / 5212 / 5214 / 5216 / 5267 / 5268 /

5270 / 5278 / 5280 / 5287

5710 / 5712 / 5714 / 5716 / 5767 / 5768 /

5770 / 5778 / 5780 / 5787

#### Natural Advantages for Unique Performance.





#### 5000 QUICK GUIDE


		Door	Tested	Max. D	oor Size	End Stile	Se	ection Skins		Window
M	odel	Thickness	U-Factor	Width	Height	Type	Inside	Outside	Color Options	Options
<b>*</b>	5814	3" (76.2mm)	0.089	21′-2″	28′-0″	16 GA Steel	24 GA V-Groove Stucco Aluminum	24 GA Flush Stucco Aluminum	Polar White	TL
*	5816	3" (76.2mm)	0.089	21′-2″	28'-0"	16 GA Steel	24 GA V-Groove Stucco Aluminum	24 GA V-Groove Stucco Aluminum	Polar White	TL
<b>*</b>	5870	3" (76.2mm)	0.089	21'-2"	28'-0"	16 GA Steel	24 GA V-Groove Stucco Aluminum	24 GA Ranch Panel Stucco Aluminum	Polar White	None
<b>*</b>	5880	3" (76.2mm)	0.089	21′-2″	28′-0″	16 GA Steel	24 GA V-Groove Stucco Aluminum	24 GA Standard Panel Stucco Aluminum	Polar White	None
<b>*</b>	5210	2" (50.8mm)	0.110	18′-2″	16′-0″	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Flush Stucco Aluminum	Polar White	RP, SP, DP, CP, LP, TL
*	5212	2" (50.8mm)	0.110	18′-2″	16′-0″	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA V-Groove Stucco Aluminum	Polar White	SP, DP, CP, TL
<b>*</b>	5214	2" (50.8mm)	0.110	21′-2″	28'-0"	16 GA Steel	24 GA V-Groove Stucco Aluminum	24 GA Flush Stucco Aluminum	Polar White	TL
<b>*</b>	5216	2" (50.8mm)	0.110	21'-2"	28'-0"	16 GA Steel	24 GA V-Groove Stucco Aluminum	24 GA V-Groove Stucco Aluminum	Polar White	TL
<b>*</b>	5267	2" (50.8mm)	0.110	21-'2"	28'-0"	Extruded End Cap	24 GAV-Groove Stucco Aluminum	24 GA Ranch Panel Stucco Aluminum	Polar White	СР
<b>*</b>	5268	2" (50.8mm)	0.110	21-'2"	28'-0"	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Standard Panel Stucco Aluminum	Polar White	СР
<b>*</b>	5270	2" (50.8mm)	0.110	21-'2"	28'-0"	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Ranch Panel Stucco Aluminum	Polar White	LP
<b>*</b>	5278	2" (50.8mm)	0.110	21-'2"	28'-0"	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Standard Panel Stucco Aluminum	Polar White	LP
<b>*</b>	5280	2" (50.8mm)	0.110	21-'2"	28'-0"	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Standard Panel Stucco Aluminum	Polar White	RP
<b>*</b>	5287	2" (50.8mm)	0.110	21-'2"	28′-0″	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Ranch Panel Stucco Aluminum	Polar White	RP
<b>*</b>	5710	1-3/4" (44.5mm)	0.097	18'-2"	16′-0″	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Flush Stucco Aluminum	Polar White	RP, SP, DP, CP, LP, TL
<b>*</b>	5712	1-3/4" (44.5mm)	0.097	18′-2″	16′-0″	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA V-Groove Stucco Aluminum	Polar White	SP, DP, CP, TL
<b>*</b>	5714	1-3/4" (44.5mm)	0.097	21′-2″	28'-0"	16 GA Steel	24 GA V-Groove Stucco Aluminum	24 GA Flush Stucco Aluminum	Polar White	TL
<b>*</b>	5716	1-3/4" (44.5mm)	0.097	21′-2″	28'-0"	16 GA Steel	24 GA V-Groove Stucco Aluminum	24 GA V-Groove Stucco Aluminum	Polar White	TL
<b>*</b>	5767	1-3/4" (44.5mm)	0.097	21-'2"	28'-0"	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Ranch Panel Stucco Aluminum	Polar White	СР
<b>*</b>	5768	1-3/4" (44.5mm)	0.097	21-'2"	28'-0"	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Standard Panel Stucco Aluminum	Polar White	СР
<b>*</b>	5770	1-3/4" (44.5mm)	0.097	21-'2"	28'-0"	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Ranch Panel Stucco Aluminum	Polar White	LP
<b>*</b>	5778	1-3/4" (44.5mm)	0.097	21-'2"	28'-0"	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Standard Panel Stucco Aluminum	Polar White	LP
<b>*</b>	5780	1-3/4" (44.5mm)	0.097	21-'2"	28'-0"	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Standard Panel Stucco Aluminum	Polar White	RP
<b>*</b>	5787	1-3/4" (44.5mm)	0.097	21-'2"	28'-0"	Extruded End Cap	24 GA V-Groove Stucco Aluminum	24 GA Ranch Panel Stucco Aluminum	Polar White	RP

RP = Standard SP = SlimLine DP = Double SlimLine CP = Carriage House LP = Ranch TL = TL Lites

Flush Stucco Panel Model 5814, Model 5210, Model 5214, Model 5710, Model 5714



**Raised Ranch Stucco Panel** Model 5870, Model 5270, Model 5770, Model 5267, Model 5767, Model 5287, Model 5787



**V-Groove Stucco Panel** Model 5816, Model 5212, Model 5216, Model 5712, Model 5716



**Raised Standard Stucco Panel** Model 5880, Model 5280, Model 5780, Model 5268, Model 5768, Model 5278, Model 5778

#### 5800 Series



A Full Thermal Break is used in the tongue-and-groove construction of all 5800 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.

5800 series doors include Air Infiltration Seals, which exceed the ASHRAE 90.1 Standard when installed with standard bottom seal and commonly available rigid/flexible vinyl door stop.


#### 5200 Series



A **Full Thermal Break** is used in the tongue-and-groove construction of all 5200 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.

5200 series doors include **Air Infiltration Seals**, which exceed the ASHRAE 90.1 Standard when installed with standard bottom seal and commonly available rigid/flexible vinyl door stop.

#### 5700 Series



A Full Thermal Break is used in the tongue-and-groove construction of all 5700 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.

For detailed information about the construction of this series, see pages 34-35.

#### ( ) 5000 Series Available Options

2" or 3" Track Exhaust Port Cam Safety Device Spring Bumpers Chain Hoist Operators

Top Header Seal Double Steel End Stiles Keyed Lock (5200 & 5700) Aluminum Full View Section (5200 & 5700)

High Cycle Springs High Cycle Rollers

Wind Load Wind Load & Impact ASTM E 84 Fire Rated (only Miami Dade)

**Optional Exhaust Port** (interior view)





# 14 816 in bronze with large TL lites



#### COMMERCIAL 800 SERIES

3" Thick



814 / 816 / 832 / 833 / 832-20 / 833-20 / 870 / 880 / 890

# The Architects' Choice For the Most Demanding Specifications


The outstanding features and benefits of the Haas 800 Series have made it the door of choice among commercial and industrial architects. The 800 series commercial insulated steel doors feature a full 3" pressure-injected core of high-density environmentally compliant polyurethane foam insulation with a tested U-Factor of 0.089 – the best in the commercial door industry. The 800 series is exceptionally strong and is reinforced with roll-formed galvanized steel struts and double-end hinges as required to meet or exceed local wind load specifications. It is the ideal door for locations that require both maximum energy efficiency and durable strength.







V-Groove Woodgrain Panel Model 816





**V-Groove Smooth Panel** Model 833, Model 833-20



Raised Ranch Woodgrain Panel Model 870



**Raised Standard Woodgrain Panel** Model 880



**Raised Sculptured Woodgrain Panel** 



A **Full Thermal Break** is used in the tongue-and-groove construction of all 800 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.

800 series doors include **Air Infiltration Seals**, which exceed the ASHRAE 90.1 Standard when installed with standard bottom seal and commonly available rigid/flexible vinyl door stop.

#### 800 Series **Available Options**

2" or 3" Track Double Steel End Stiles Exhaust Port Cam Safety Device Spring Bumpers Chain Hoist Operators High Cycle Springs Glazing (lites) High Cycle Rollers Wind Load & Impact ASTM E 84 Fire Rated

#### **Optional Exhaust Port** (interior view)





Window

Options

TL

TL

TL

TL

TL = TL Lites

**Color Options** 

All except Plank, Gray-

wood, and Bi-Directionals

All except Plank, Gray-

wood, and Bi-Directionals

Polar White and Brown

Polar White and Brown

Polar White and Brown

Polar White and Brown

All except Plank, Graywood, and Bi-Directionals

All except Plank, Graywood, and Bi-Directionals

All except Plank, Gray-

wood, and Bi-Directionals

Outside

26 GA Flush

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

20 GA Flush

Smooth Steel

20 GA Flush

Smooth Steel

20 GAV-Groove

Smooth Steel

20 GAV-Groove

Smooth Steel

26 GA Ranch Panel

Woodgrain Steel

26 GA Standard Panel

Woodgrain Steel

26 GA Sculptured Panel

Woodgrain Steel

For detailed information about the construction of this series, see pages 34-35.

Max. Door Size End Stile

38'-2" 32'-0"

38'-2" 32'-0"

24'-2" 32'-0"

24'-2" 32'-0"

38'-2" 32'-0"

38'-2" 32'-0"

24'-0" 32'-0"

24'-0" 32'-0"

24'-0" 32'-0"

Type

16 GA

Steel

16 GA Steel

Inside 26 GAV-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

20 GAV-Groove

Smooth Steel

26 GAV-Groove

Woodgrain Steel

20 GA V-Groove

Smooth Steel

26 GA V-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

Door

Thickness

3" (76.2mm)

3" (76.2mm)

3" (76.2mm)

3" (76.2mm)

(76.2mm)

(76.2mm)

(76.2mm)

(76.2mm)

814

832

833-20

870

U-Factor

0.089

0.089

.0.089

.0.089

0.089

0.089

0.089



# 2080 in white with standard plain lites



### COMMERCIAL 2000 SERIES

#### 2" Thick



2010 / 2012 / 2014 / 2016 / 2032 / 2033 / 2032-20 / 2033-20 / 2060 / 2061 / 2063 / 2064 / 2067 / 2068 / 2069 / 2070 / 2071 / 2072 / 2073 / 2074 / 2078 / 2079 / 2080 / 2081 / 2082 / 2087 / 2090

#### The Strength To Keep Out Noise and Weather

insulated steel doors are manufactured with the elements in mind. They will enhance the beauty of your building while insulating and dampening outside noise at the same time. Choosing low U-Factor sectional doors will help increase energy efficiency and savings. Polyurethane insulation provides the lowest U-Factor available in sectional steel doors.

2000 series doors are reinforced with roll-formed galvanized steel struts and double-end hinges, as required to meet wind load specifications and to comply with ANSI/DASMA 102-2004. The protective coating system is found on both the interior and exterior steel.





**Raised Ranch Woodgrain Panel** Model 2070, Model 2067, Model 2087





Glazing (lites)

Pass Door

Keyed Lock

Pass Door


(interior view)

High Cycle Rollers

Wind Load Rating

ASTM E 84 Fire Rated

Aluminum Full View Section



A Full Thermal Break is used in the tongue-and-groove construction of all 2000 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.

2000 series doors include Air Infiltration Seals, which exceed the ASHRAE 90.1 Standard when installed with standard bottom seal and commonly available rigid/flexible vinyl door stop.



Wind Load

(Convenience only, not a legal exit, or ADA compliant Door trim color is only available in clear anodized Available in doors up to 16'2" wide, 16' high. Not available in all models.)

# Flush Woodgrain Panel Model 2010, Model 2014



**V-Groove Smooth Panel** Model 2033, Model 2033-20



V-Groove Woodgrain Panel

Model 2012, Model 2016

Ribbed Short Woodgrain Panel Model 2060, Model 2072, Model 2082



**Recessed Long Woodgrain Panel** Model 2063, Model 2073



**Raised Standard Woodgrain Panel** Model 2080, Model 2068, Model 2078



**Raised Sculptured Woodgrain Panel** Model 2090, Model 2069, Model 2079

Window

**Options** 

RP. SP. DP

CP. LP. TL

SP, DP, CP,

TL

TL

TL

TL

TL

CP

СР

CP

CP

CP

CP

CP

ΙP

LP

LP

LP

LP

**Color Options** 

All except

Bi-Directionals

All except Plank or

Bi-Directionals

All except

Bi-Directionals

All except Plank or

Polar White and Brown

Polar White and Brown

Polar White and Brown

Polar White and Brown

All except Plank

All except Plank or

Bi-Directionals

All except Plank or

All except Plank or

#### 2000 Series Available Options

2" or 3" Track Double Steel End Stiles Exhaust Port Cam Safety Device Spring Bumpers Chain Hoist Operators High Cycle Springs

Optional Exhaust Port (interior view)





Woodgrain Steel SP = SlimLine DP = Double SlimLine CP = Carriage House LP = Ranch TL = TL Lites Note: Certain weights and/or applications may limit the size allowed.

Max. Door Size End Stile

16'-0"

16'-0"

32'-0"

32'-0"

32'-0"

32'-0"

32'-0"

16'-0"

16′-0″

32'-0"

32'-0"

32'-0"

16'-0"

16′-0″

32'-0"

Type

Extruded

End Cap

End Cap

16 GA

16 GA

16 GA

16 GA

Steel

16 GA

Extruded

End Cap

End Cap

End Cap

Extruded

Extruded

Tested

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

0.094

U-Factor Width Height

18'-2"

18'-2"

38'-2"

38'-2"

24'-2"

24'-2"

38'-2"

38'-2"

18-'2"

18-'2"

24-'2"

24-'2"

24-'2"

18-'2"

18-'2"

24-'2"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

Door

2" (50.8mm)

**2032-20** 2" (50.8mm)

**2033-20** 2" (50.8mm)

**2060** 2" (50.8mm)

Model

2016

2033

2061

2063

2064

2067

2074

2078

2079

20

Section Skins

Outside

26 GA Flush Panel

Woodgrain Steel

26 GAV-Groove Panel

Woodgrain Steel

26 GA Flush Panel

Woodgrain Steel

26 GA V-Groove Panel

Woodgrain Steel

20 GA Flush Panel

Smooth Steel

20 GA Flush Panel

Smooth Steel

20 GAV-Groove Panel

Smooth Steel

20 GA V-Groove Panel

Smooth Steel

26 GA Ribbed Short

Panel Woodgrain Steel

26 GA Recessed Short

Panel Woodgrain Steel

26 GA Recessed Long Panel

Woodgrain Steel

26 GA Ribbed Long Panel

Woodgrain Steel

26 GA Ranch Panel

Woodgrain Steel

26 GA Standard Panel

Woodgrain Steel

26 GA Sculptured Panel

Woodgrain Steel

26 GA Ranch Panel

Woodgrain Steel

26 GA Recessed Short

Panel Woodgrain Steel

26 GA Ribbed Short

Panel Woodgrain Steel

26 GA Recessed Long Panel

Woodgrain Steel

26 GA Ribbed Long Panel

Woodgrain Steel

26 GA Standard Panel

Woodgrain Steel

26 GA Sculptured Panel

Woodgrain Steel

26 GA Standard Panel

Woodarain Steel

26 GA Recessed Short

Panel Woodgrain Steel

26 GA Ribbed Short

Panel Woodgrain Steel

26 GA Ranch Panel

Woodgrain Steel

26 GA Sculptured Panel

Inside

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

20 GAV-Groove

Smooth Steel

26 GAV-Groove

Woodgrain Steel

20 GAV-Groove

Smooth Steel 26 GAV-Groove

Woodgrain Steel 26 GA V-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel 26 GAV-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GA V-Groove



# 22 716 in polar white with large TL lites



#### COMMERCIAL 700 SERIES

13/4" Thick




710 / 712 / 714 / 716 / 732 / 733 / 732-20 / 733-20 / 760 / 763 / 764 / 767 / 768 / 769 / 770 / 771 / 772 / 773 / 774 / 778 / 779 / 780 / 781 / 782 / 787 / 790

#### Built to Last

Haas 700 Series commercial insulated steel doors stand up to the elements, while dramatically decreasing exterior noise and enhancing the overall aesthetics of your building at the same time. The 1¾" thick 700 Series insulated steel doors help increase energy savings with polyurethane foam cores and are built to last.

NSULATE





**Flush Smooth Panel** Model 732, Model 732-20





Model 770, Model 767, Model 787



A **Full Thermal Break** is used in the tongue-and-groove construction of all 700 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which



**Wind Load** 

**Recessed Short Woodgrain Panel** Model 761, Model 771, Model 781

Raised Ranch Woodgrain Panel



limits the transfer of temperature.

#### **Optional Exhaust Port** (interior view)



Pass Door

(exterior view)

(Convenience only, not a legal exit, or ADA compliant. Door trim color is only available in clear anodized. Available in doors up to 16'2" wide, 16' high. Not available in all models.)

Window

**Options** 

RP, SP, DP

CP, LP, TL

SP, DP, CP,

TL

TL

TL

TL

TL

TL

CP

CP

CP

CP

CP

CP

CP

LP

LP

LP

LP

ΙP

LP

RP

RP

RP

RP

**Color Options** 

All except

Bi-Directionals

All except Plank or

Bi-Directionals

All except

Bi-Directionals

All except Plank or

Bi-Directionals

Polar White and Brown

Polar White and Brown

Polar White and Brown

Polar White and Brown

All except Plank

All except Plank or

Bi-Directionals

All except Plank or





**V-Groove Smooth Panel** Model 733, Model 733-20



**Ribbed Long Woodgrain Panel** Model 764, Model 774



**Raised Standard Woodgrain Panel** Model 780, Model 768, Model 778



Model 763, Model 773

**Ribbed Short Woodgrain Panel** 

Model 760, Model 772, Model 782

**Recessed Long Woodgrain Panel** 

Raised Sculptured Woodgrain Panel Model 790, Model 769, Model 779



700 Series **Available Options** 2" or 3" Track **Double Steel End Stiles** Exhaust Port Cam Safety Device Spring Bumpers Chain Hoist

Operators High Cycle Springs Glazing (lites) High Cycle Rollers Aluminum Full View Section Pass Door Top Header Seal Keyed Lock

ASTM E 84 Fire Rated

Wind Load Rating

SP = SlimLine DP = Double SlimLine CP = Carriage House LP = Ranch TL = TL Lites Note: Certain weights and/or applications may limit the size allowed.

QUICK GUIDE

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

0.093

Door

1-3/4"

(44.5mm)

Model

732-20

733-20

733

760

761

763

767

710

Tested Max. Door Size End Stile

Width Height

38'-2" 32'-0"

38'-2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

38'-2" 32'-0"

38'-2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

18-'2" 16'-0"

18-'2" 16'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

18-'2" 16'-0"

18-'2" 16'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

24-'2" 32'-0"

0.093 24-'2" 32'-0"

18'-2"

18'-2"

16'-0"

16′-0″

Type

Extruded

End Cap

End Cap

16 GA

16 GA

16 GA

16 GA

16 GA

Extruded

End Cap

Extruded

End Cap

End Cap

End Cap

End Cap

End Cap

Extruded

End Cap

End Cap

End Cap

Extruded

End Cap

Extruded

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

20 GAV-Groove

Smooth Steel

26 GA V-Groove

Woodgrain Steel

20 GAV-Groove

Smooth Steel

26 GAV-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GAV-Groove

Woodgrain Steel

Section Skins

Outside

26 GA Flush

Woodgrain Steel

26 GA V-Groove

Woodgrain Steel

26 GA Flush

Woodgrain Steel

26 GA V-Groove

Woodgrain Stee 20 GA Flush

Smooth Stee

20 GA Flush

Smooth Steel

20 GAV-Groove

Smooth Steel

20 GAV-Groove

Smooth Steel

26 GA Ribbed Short Panel

Woodgrain Steel

26 GA Recessed Short Panel

Woodgrain Steel

26 GA Recessed Long Panel

Woodgrain Steel

26 GA Ribbed Long Panel

Woodgrain Steel 26 GA Ranch Panel

Woodgrain Steel

26 GA Standard Panel

Woodgrain Steel

26 GA Sculptured Panel

Woodgrain Steel

26 GA Ranch Panel

Woodgrain Steel

26 GA Recessed Short Panel

Woodgrain Steel

26 GA Ribbed Short Panel

Woodgrain Steel

26 GA Recessed Long Panel

Woodgrain Stee

26 GA Ribbed Long Panel

Woodgrain Steel

26 GA Standard Panel

Woodgrain Steel

26 GA Sculptured Panel

Woodgrain Steel

26 GA Standard Panel

Woodgrain Steel

26 GA Recessed Short Panel

Woodgrain Steel

26 GA Ribbed Short Panel

Woodgrain Steel

26 GA Ranch Panel

Woodgrain Steel

26 GA Sculptured Panel

Woodgrain Steel



# 26 616 in sandstone



### COMMERCIAL 600 SERIES

1<sup>3</sup>/<sub>8</sub>" Thick



610 / 612 / 614 / 616 / 632 / 632-20 / 633 / 633-20 / 660 / 661 / 663 / 664 / 667 / 668 / 669 / 670 / 671 / 672 / 673 / 674 / 678 / 679 / 680 / 681 / 682 / 687 / 690

### Strong, Efficient and Attractive

When your major considerations include energy efficiency, noise buffering and beauty, a Haas 600 Series commercial insulated steel door will far exceed your expectations. These environmentally compliant, polyurethane foam-injected steel doors offer exceptional benefits for commercial applications, including durable strength, unique paint system and hard working hardware to withstand the harshest of elements.

<u>NSULA</u>



#### Max. Door Size End Stile Section Skins Tested Door Window Model **Color Options** Thickness U-Factor Width Height **Options** Type Inside Outside Extruded 26 GA V-Groove 26 GA Flush All except RP. SP. DF 610 18'-2" 16'-0" 0.106 (34.9mm) CP, LP, TL End Cap Woodgrain Steel Woodgrain Steel Bi-Directionals All except Plank or SP, DP, PC, 1-3/8" 26 GA V-Groove 26 GA V-Groove 612 18'-2" 16'-0" 0.106 (34.9mm) End Cap Woodgrain Steel Woodgrain Steel Bi-Directionals All except 26 GA V-Groove 26 GA Flush 1-3/8" **E** TL 614 0.106 18'-2" 16'-0" (34.9mm)Steel Woodgrain Steel Woodgrain Steel Bi-Directionals 1-3/8" 16 GA 26 GA V-Groove 26 GA V-Groove All except Plank or Œ TL 0.106 18'-2" 16'-0" (34.9mm) Bi-Directionals Woodgrain Steel Woodgrain Stee 20 GA Flush 1-3/8" 16 GA 26 GAV-Groove Polar White and Brown TL 0.106 18'-2" 16'-0" (34.9mm) Woodgrain Steel 1-3/8" 16 GA 20 GAV-Groove 20 GA Flush Polar White and Brown TL 0.106 18'-2" 16'-0" (34.9mm) Smooth Steel Smooth Steel 1-3/8" 26 GAV-Groove 20 GA V-Groove 16 GA Polar White and Brown TL 633 0.106 18'-2" 16'-0" Steel Woodgrain Steel Smooth Steel 20 GA V-Groove 20 GA V-Groove 1-3/8" 16 GA 633-20 TL Polar White and Brown 0.106 18'-2" 16'-0" (34.9mm) Smooth Steel Smooth Steel 26 GA Ribbed Short Panel 1-3/8" 26 GA V-Groove Extruded Œ 0.106 All except Plank CP 18'-2" 16'-0" 660 (34.9mm) End Cap Woodgrain Steel Woodgrain Steel 26 GA Recessed Short Panel 1-3/8" 26 GA V-Groove Extruded All except Plank CP 661 0.106 18'-2" 16'-0" (34.9mm) End Cap Woodgrain Stee Woodgrain Steel 1-3/8" 26 GA V-Groove 26 GA Recessed Long Panel CP 0.106 All except Plank 663 18'-2" 16'-0" (34.9mm) End Cap Woodgrain Steel Woodgrain Steel 1-3/8" 26 GAV-Groove 26 GA Ribbed Long Panel V CP All except Plank 664 0.106 18'-2" 16'-0" (34.9 mm)End Cap Woodgrain Steel Panel Woodgrain Steel 26 GA Ranch Panel 1-3/8" 26 GA V-Groove Œ All except Plank CP 667 0.106 18'-2" 16'-0" (34.9mm) End Cap Woodgrain Steel Woodgrain Steel 1-3/8" 26 GA V-Groove 26 GA Standard Panel CP All except Plank 0.106 18'-2" 16'-0" (34.9mm) Woodgrain Steel End Cap Woodgrain Stee 1-3/8" 26 GA V-Groove 26 GA Sculptured Panel Extruded All except Plank CP 0.106 18'-2" 16′-0″ Woodgrain Steel (34.9mm) End Cap Woodgrain Steel 26 GA Ranch Panel All except Plank or 1-3/8" 26 GAV-Groove Extruded LP 0.106 18'-2" 16'-0" (34.9mm) End Cap Woodgrain Steel Woodgrain Steel Bi-Directionals 1-3/8" 26 GA V-Groove 26 GA Recessed Short Panel All except Plank or Extruded LP 0.106 18'-2" 16'-0" (34.9mm) End Cap Woodgrain Steel Woodgrain Steel Bi-Directionals 1-3/8" 26 GA V-Groove 26 GA Ribbed Short Panel All except Plank or Extruded **E** ΙP 0.106 18'-2" 16'-0" End Cap (34.9mm) Woodarain Steel Woodgrain Steel Bi-Directionals 1-3/8" Extruded 26 GAV-Groove 26 GA Recessed Long Panel All except Plank or LP 0.106 18'-2" 16'-0" (34.9mm) End Cap Woodgrain Steel Bi-Directionals Woodarain Steel 1-3/8" 26 GA V-Groove 26 GA Ribbed Long Panel All except Plank or Extruded 0.106 ΙP 674 18'-2" 16′-0" (34.9mm) Panel Woodgrain Steel End Cap Woodgrain Steel Bi-Directionals 26 GA Standard Panel 1-3/8" 26 GAV-Groove All except Plank or Œ Extruded LP 678 0.106 18'-2" 16'-0" (34.9 mm)End Cap Woodgrain Steel Woodgrain Steel Bi-Directionals 1-3/8" 26 GA Sculptured Panel All except Plank or Extruded 26 GAV-Groove **X** LP 679 0.106 18'-2" 16'-0" (34.9 mm)End Cap Woodgrain Steel Woodgrain Steel Bi-Directionals 26 GA Standard Panel All except Plank or 1-3/8" Extruded 26 GAV-Groove RP 0.106 18'-2" 16'-0" (34.9 mm)End Cap Woodgrain Steel Woodgrain Steel Bi-Directionals 1-3/8" 26 GA V-Groove 26 GA Recessed Short Panel All except Plank or 681 0.106 18'-2" 16'-0" (34.9mm) End Cap Woodgrain Steel Woodgrain Steel Bi-Directionals 26 GA Ribbed Short Panel All except Plank or 1-3/8" 26 GAV-Groove V RP 0.106 18'-2" 16'-0" Woodgrain Steel (34.9mm) End Cap Bi-Directionals Woodgrain Steel 26 GA V-Groove 26 GA Ranch Panel All except Plank or 1-3/8" Extruded RP 0.106 18'-2" 16'-0" (34.9mm) End Cap Woodgrain Steel Woodarain Steel Bi-Directionals 1-3/8" Extruded 26 GA V-Groove 26 GA Sculptured Panel All except Plank or RP 0.106 18'-2" 16'-0" (34.9mm) Woodgrain Stee

### PANEL Flush Woodgrain Panel Model 610, Model 614





**V-Groove Woodgrain Panel** Model 612, Model 616



Flush Smooth Panel Model 632, Model 632-20



**V-Groove Smooth Panel** Model 633, Model 633-20



**Ribbed Short Woodgrain Panel** Model 660, Model 672, Model 682



**Recessed Short Woodgrain Panel** Model 661, Model 671, Model 681



**Recessed Long Woodgrain Panel** Model 663, Model 673



**Ribbed Long Woodgrain Panel** Model 664 Model 674



**Raised Ranch Woodgrain Panel** Model 670, Model 667, Model 687



**Raised Standard Woodgrain Panel** Model 680, Model 668, Model 678



**Sculptured Raised Woodgrain Panel** Model 690, Model 669, Model 679



A Full Thermal Break is used in the tongue-andgroove construction of all 600 series doors. This rigid vinyl extrusion seals



when installed with standard bottom seal and commonly available rigid/ flexible vinyl door stop.

#### 600 Series **Available Options**

2" or 3" Track Double Steel End Stiles Exhaust Port Cam Safety Device Spring Bumpers Chain Hoist Operators High Cycle Springs Glazing (lites) High Cycle Rollers **Keyed Lock** Wind Load Rating ASTM E 84 Fire Rated



Optional Exhaust Port (interior view)











# 2400 SERIES **\*** & SMOOTH RIBBED STEEL

2" Thick Optional Insulation

C2460 / C2460L / C2461 / C2461L / C2470 / C2470L / C2471 / C2471L / C2472 / C2472L / C2480 / C2480L / C2480S / C2481 / C2481L / C2482 / C2482L

C2011 / C2011L / C2011S / C2015 / C2015L / C2015S / C2410 / C2410L / C2411 / C2411L / C2411S / C2415 / C2415L/C2415S/C2511/C2511L/ C2511S/

#### Strength and Value

Haas 2400 Series & Smooth Ribbed Steel doors are a value-based products that offer the strength of steel in six panel styles and up to nine color choices. All models offer the upgrade of adding energy-efficient insulation panels. These doors are the ideal choice when economy is the prime consideration but a high quality, beautifully crafted product is still a necessity.

2 100	20										
Model	Door	Tested	Max. Do		End Stile	S	Section Skins	Insulation Type	Stile	Calan Outlana	Window
iviodei	Thickness	U-Factor	Width	Height	Туре	Inside	Outside	insulation type	GA	Color Options	Options
C2410	2"	N/A	18′-2″	10'-0"	C-Shaped Steel	N/A	24 GA Flush Panel Woodgrain Steel	None	18		RP, CP, LP, RSL
<b>C2410L</b>	2"	0.215	18′-2″	10′-0″	C-Shaped Steel	Laminate Backer	24 GA Flush Panel Woodgrain Steel	Inserted Polystyrene Panels	18		RP, CP, LP, RSL
C2460	2"	N/A	24'-2"	16′-0″	C-Shaped Steel	N/A	24 GA Ribbed Short Panel Woodgrain Steel	None	18		СР
<b>C2460L</b>	2"	0.215	24'-2"	16′-0″	C-Shaped Steel	Laminate Backer	24 GA Ribbed Short Panel Woodgrain Steel	Inserted Polystyrene Panels	18		СР
C2461	2"	N/A	24'-2"	16′-0″	C-Shaped Steel	N/A	24 GA Recessed Short Panel Woodgrain Steel	None	18		СР
<b>C2461L</b>	2"	0.215	24'-2"	16′-0″	C-Shaped Steel	Laminate Backer	24 GA Recessed Short Panel Woodgrain Steel	Inserted Polystyrene Panels	18		СР
C2470	2"	N/A	24'-2"	16′-0″	C-Shaped Steel	N/A	24 GA Ranch Panel Woodgrain Steel	None	18		LP
<b>C2470L</b>	2"	0.215	24'-2"	16′-0″	C-Shaped Steel	Laminate Backer	24 GA Ranch Panel Woodgrain Steel	Inserted Polystyrene Panels	18		LP
C2471	2"	N/A	24'-2"	16′-0″	C-Shaped Steel	N/A	24 GA Recessed Short Panel Woodgrain Steel	None	18	All 2400 Series models are available in:	LP
<b>C2471L</b>	2"	0.215	24'-2"	16′-0″	C-Shaped Steel	Laminate Backer	24 GA Recessed Short Panel Woodgrain Steel	Inserted Polystyrene Panels	18	Polar White, Almond, Sahara Tan, Sandstone, Brown, Espresso,	LP
C2472	2"	N/A	24'-2"	16′-0″	C-Shaped Steel	N/A	24 GA Ribbed Short Panel Woodgrain Steel	None	18	Charcoal, Carbon Black & English Oak	LP
<b>C2472L</b>	2"	0.215	24'-2"	16'-0"	C-Shaped Steel	Laminate Backer	24 GA Ribbed Short Panel Woodgrain Steel	Inserted Polystyrene Panels	18		LP
C2480	2"	N/A	24'-2"	16′-0″	C-Shaped Steel	N/A	24 GA Standard Panel Woodgrain Steel	None	18		RP
<b>C2480L</b>	2"	0.215	24'-2"	16′-0″	C-Shaped Steel	Laminate Backer	24 GA Standard Panel Woodgrain Steel	Inserted Polystyrene Panels	18		RP
<b>C2480S</b>	2"	0.225	24'-2"	16′-0″	C-Shaped Steel	Steel Backer	24 GA Standard Panel Woodgrain Steel	Inserted Polystyrene Panels	18		RP
C2481	2"	N/A	24'-2"	16'-0"	C-Shaped Steel	N/A	24 GA Recessed Short Panel Woodgrain Steel	None	18		RP
<b>C2481L</b>	2"	0.215	24'-2"	16′-0″	C-Shaped Steel	Laminate Backer	24 GA Recessed Short Panel Woodgrain Steel	Inserted Polystyrene Panels	18		RP
C2482	2"	N/A	24'-2"	16′-0″	C-Shaped Steel	N/A	24 GA Ribbed Short Panel Woodgrain Steel	None	18		RP
<b>C2482L</b>	2"	0.215	24'-2"	16′-0″	C-Shaped Steel	Laminate Backer	24 GA Ribbed Short Panel Woodgrain Steel	Inserted Polystyrene Panels	18		RP

#### SMOOTH RIBBED STEEL QUICK GUIDE

N/II - I	Door	Tested	Max. D	oor Size	End Stile	Se	ction Skins	la sulation Toron	Stile		Window
Model	Thickness	U-Factor	Width	Height	Туре	Inside	Outside	Insulation Type	GA	Color Options	Options
C2011	2"	N/A	30′-2″	20'-0"	C-Shaped Steel	N/A	20 GA Ribbed Steel	None	18	Polar White	RSL
C2011L	2"	N/A	30′-2″	20'-0"	C-Shaped Steel	Laminate Backer	20 GA Ribbed Steel	Inserted Polystyrene Panels	18	Polar White	RSL
C2011S	2"	N/A	24'2"	20'-0"	C-Shaped Steel	Steel Backer	20 GA Ribbed Steel	Inserted Polystyrene Panels	18	Polar White	RSL
C2015	2"	N/A	30′-2″	20'-0"	C-Shaped Steel	N/A	20 GA Ribbed Steel	None	16	Polar White	RSL
C2015L	2"	N/A	30′-2″	20′-0″	C-Shaped Steel	Laminate Backer	20 GA Ribbed Steel	Inserted Polystyrene Panels	16	Polar White	RSL
C2015S	2"	N/A	24'-2"	20'-0"	C-Shaped Steel	Steel Backer	20 GA Ribbed Steel	Inserted Polystyrene Panels	16	Polar White	RSL
C2411**	2"	N/A	30′-2″	20'-0"	C-Shaped Steel	N/A	24 GA Ribbed Steel	None	18	Polar White, Sandstone, Brown & Carbon Black	RSL
C2411L**	2"	N/A	30′-2″	20'-0"	C-Shaped Steel	Laminate Backer	24 GA Ribbed Steel	Inserted Polystyrene Panels	18	Polar White, Sandstone, Brown & Carbon Black	RSL
C2411S	2"	N/A	24'-2"	20'-0"	C-Shaped Steel	Steel Backer	24 GA Ribbed Steel	Inserted Polystyrene Panels	18	Polar White, Sandstone, Brown & Carbon Black	RSL
C2415**	2"	N/A	30'-2"	20'-0"	C-Shaped Steel	N/A	24 GA Ribbed Steel	None	16	Polar White, Sandstone, Brown & Carbon Black	RSL
C2415L**	2"	N/A	30′-2″	20′-0″	C-Shaped Steel	Laminate Backer	24 GA Ribbed Steel	Inserted Polystyrene Panels	16	Polar White, Sandstone, Brown & Carbon Black	RSL
C2415S	2"	N/A	24'-2"	20′-0"	C-Shaped Steel	Steel Backer	24 GA Ribbed Steel	Inserted Polystyrene Panels	16	Polar White, Sandstone, Brown & Carbon Black	RSL
C2511	2"	N/A	16'-2"	16′-0″	C-Shaped Steel	N/A	24 GA Nominal Ribbed Steel	None	18	Polar White	RSL
C2511L	2"	N/A	16′-2″	16′-0"	C-Shaped Steel	Laminate Backer	24 GA Nominal Ribbed Steel	Inserted Polystyrene Panels	18	Polar White	RSL
C2511S	2"	N/A	16'-2"	16′-0″	C-Shaped Steel	Steel Backer	24 GA Nominal Ribbed Steel	Inserted Polystyrene Panels	18	Polar White	RSL

\*\*widths over 24' 2" are only available in polar white RSL = Ribbed Steel Lites

Flush Woodgrain Panel Model C2410, Model C2410L



**Raised Ranch Woodgrain Panel** Model C2470, Model C2470L



Ribbed Short Woodgrain Panel Model C2460, Model C2460L, Model C2472, Model C2472L, Model C2482, Model C2482L



**Raised Standard Woodgrain Panel** Model C2480, Model C2480L Model C2480S



**Recessed Short Woodgrain Panel** (not available in 18" sections) Model C2461, Model C2461L, Model C2471, Model C2471L, Model C2481, Model C2481L



**Smooth Ribbed Steel Panel** Model C2011, Model C2011L, Model C2011S, Model C2015, Model C2015L, Model C2015S, Model C2511, Model C2511L, Model C2511S, Model C2411, Model C2411L, Model C2411S, Model C2415, Model C2415L, Model C2415S

#### 2400 Series & Smooth Ribbed Steel Available Options

2" or 3" Track Double Steel End Stiles Exhaust Port Cam Safety Device Spring Bumpers Chain Hoist Operators High Cycle Springs Glazing (lites) High Cycle Rollers Aluminum Full View Section Keyed Lock Wind Load Rating



Impact Lites on some Models

#### **Bottom Seal**



**Optional Exhaust Port** (interior view)




Non-Insulated Smooth Ribbed Steel - inside view



Insulated Laminate Back (L) - inside view



Insulated Steel Back (S) - inside view



DOOR PANELS

#### The Strength To Keep Out Noise And Weather

Haas commercial insulated doors stand up to the elements, while dramatically decreasing exterior noise and enhancing the overall aesthetics of your building at the same time. Choosing one of our insulated doors will help increase energy savings, as our environmentally compliant polyurethane provides one of the best U-Factors available in sectional doors.

Haas garage doors are made from steel that contains 80% recycled material. They are reinforced with roll-formed galvanized steel struts and double-end hinges, as required to meet wind load specifications and to comply with ANSI/DASMA 102. The protective coating system is found on both the interior and exterior steel.



The polyurethane foam in a Haas garage door section is fully enclosed inside the steel skins. This design puts the insulation properties of polyurethane foam far ahead of polystyrene foam for performance and value.

Polyurethane foam is a two-part system. It begins with two chemical blends that when mixed together expand and cure to fill the garage door panel. During the expansion, the foam

completely fills the inside of the panel and becomes fully adhered to the steel skins of the garage door panel to form a composite structure that is of exceptional strength and rigidity. Polyurethane foams are very stable when encapsulated inside a garage door section.

Insulating with polyurethane provides a superior product with higher insulation properties and a stronger unitized section.

# Commercial Insulated Quick Reference

Series	Thickness	Tested U-Factor
9200	2" & 5/8" overlay	0.081
9600	1-3/8" & 5/8" overlay	0.096
5800	3"	0.089
5200	2"	0.110
5700	1-3/4"	0.097
800	3"	0.089
2000	2"	0.094
700	1-3/4"	0.093
600	1-3/8"	0.106

#### Air Infiltration Seal

5800, 5200, 800 and 2000 series doors include Air Infiltration Seals, which exceed the ASHRAE 90.1 Standard when installed with standard bottom seal and commonly available rigid/flexible vinyl door stop.

•••••••••••

#### **Full Thermal Break**

A full Thermal Break is used in the tongue-and-groove construction of all commercial insulated doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact between door sections, which limits the transfer of temperature. This also provides optimum water and wind resistance.

#### Weather Seal

A full-length, one-piece heavy vinyl bottom weather seal prevents infiltration of air, rain, snow and debris. The seal reduces impact shocks when the door is closed against concrete flooring.











#### **Unique Paint System**

All Haas garage doors include a corrosion-resistant protective finish with a polyurethane primer and a durable polyester clear coat on the interior and exterior. Traditional and Plank wood grain colors include an additional ink layer. Haas Door's paint thickness is one of the highest in the industry.

Standard solid and traditional wood grain colors include a 10-year finish warranty, Plank wood grain colors have a 12-year finish warranty, and Trinar® solid colors come with a 35-year finish warranty.

•••••••••

#### Hard Working Hardware

Haas track is 2" or 3" galvanized steel, depending on door size, with bracket mount for wood jambs or continuous reverse mounting for steel jambs. For angle-mount track, door widths are 2" wider than the opening. Track rollers are 2" or 3" case-hardened inner and outer steel races with 10-ball pre-lubricated bearings. Hinges, brackets, and reinforcing struts are hot-dipped galvanized steel. Fasteners are plated for maximum corrosion resistance. Counterbalancing springs are torsion type, computer calibrated to match door load. This provides a 10,000-cycle life at the minimum; optional spring wires can achieve 25,000, 50,000 and 100,000 cycle requirements. Springs are wound from oil-tempered wire and mounted on a continuous cross header tube or solid shaft, as determined by torque load.

Contact one of our professional dealers for information on additional options including: exterior cylinder locks, chain hoist operation, safety bottom brackets, and special lift clearance tracks (high lift, vertical lift, low headroom, and those that follow the roof line).

#### Full View

Optional Aluminum Full View sections on the 5000 Series, 2000 Series, 700 Series and Smooth Ribbed Steel provide maximum light and visibility with available insulated glazing. Full view sections for the 5000 Series are available in polar white. Full view sections for the 2000 & 700 Series are available in 12 colors. Full view sections for Smooth Ribbed Steel are available in 3 colors. (Not available in Wood Grain colors.)

......

#### The E-Strut® and Wind Load

The E-Strut is the next generation of strut design. Conceived, developed and manufactured by Haas Door, testing has proven the E-Strut to outperform traditional struts. This patented design is used on all Haas Door products.

The innovative E-Strut is intelligently designed to require half as many tek screws as u-bars and struts currently in use. This means less time attaching struts in the field for installers and a savings in labor expense for our dealers.

E-Struts are available in 2 inch, 3 inch, 4 inch and 6 inch widths and come standard in a galvanized finish. The 4 inch and 6 inch sizes do not require hinge straps.

Haas Door products are available in a wide range of design pressures for wind load requirements. Contact your local Haas Door dealer for more information about wind load requirements in your area.










#### Pass Door

Custom pass doors are also available on the 2000 & 700 Series.












#### What is U-Factor?

The tested U-Factor is the measurement of heat (energy) transfer from warmer side to colder side of the garage door (in our case). Heat transfer is not desired because it means the loss of energy from conditioned spaces. A lower U-Factor indicates less heat transfer and better thermal performance.

It is the preferred method for building codes thermal performance, and architects use U-Factors to calculate building envelope energy loads. U-Factor tests the whole, installed assembly. Energy Star Fenestration products and knowledgeable professionals recognize and use U-Factor.

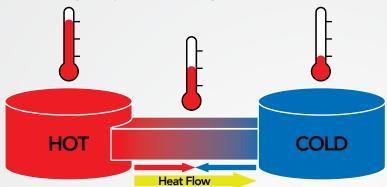

Without insulation or thermal break to stop it, energy will transfer through the door.

#### Who is requesting this industry standard?

Door & Access Systems Manufacturers Association (DASMA) has setup a verification program to provide industry wide standardization of marketing the thermal performance of sectional garage doors. This program represents a shift in how sectional garage doors thermal performance is rated, from traditional R-Value to more accurate and relevant 3rd party tested door assembly U-Factor.

DASMA and the program participants agree to increased consistency, and transparency by sharing tested data, allowing customers to compare product quality facts. More detailed information about the program and U-Factors are available at www.dasma.com/thermal.



#### Why is a tested U-Factor better than a calculated R-Value?

#### **Tested U-Factor**

- U-Factor tests the whole installed assembly which includes section joint, lites, stile attachment, etc. more relevant to thermal performance
- Third party tested and validated by the program administrator
- ANSI/DASMA 105
- Tests measure the actual heat/energy transfer
- All manufacturer results will be a direct comparison to one another

#### **Calculated R-Value**

- Only one section is calculated and provides the insulating effect through the "center" of a door section only, not the entire door
- Independently calculated by each manufacturer -
- All manufacturers using the same testing methods No testing standard resulting in a wide interpretation of the calculation
  - Calculates the resistance to thermal transfer.

#### How does this benefit you?

This shift to tested U-Factor measurements sets a standard all manufacturers in the program ahere to. Tested products included in the program must be submitted to the program administrator. Only tested products in the program can list U-Factor data. This is the most reliable thermal performance indicator in the industry. Manufacturers in the program are stepping forward and formally having their products tested to prove quality.

Comparison of products between manufacturers has never been easier or more accurate. All tested products are required to be labeled with DASMA thermal performance verification displaying testing results. For accurate data and product comparison, choose products that have been tested through this program.

Establishing the standard testing procedure, and having a third party accredited lab perform and record the testing data provides consistency across the industry. Special guidelines have been put in place to properly market the U-Factor information as well. This removes any possible confusion from one manufacturer to another.


#### How can I tell if the product has been tested?

The use of DASMA thermal performance Badge, Label, or Icon will quickly identify products included in the program.



Badge



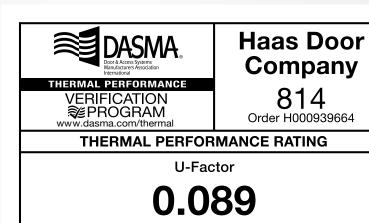

The manufacturer pledges that U-Factor rating conforms to ANSI/DASMA 105 procedures for determining whole product performance. DASMA ratings are determined for a fixed set of environmental conditions and specific product sizes. DASMA does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.

www.dasma.com/thermal

Label

#### **GLASS OPTIONS**

#### American Tradition™ 9000 Series

- 10 Year Delamination and Rust-through Warranty on Sections
- 35 Year Finish Warranty for Steel Sections with Trinar® Colors
- 10 Year Finish Warranty for Solid and Wood Grain Colors
- 5 Year Overlay Delamination for all Colors
- 1 Year Hardware Warranty
- 1 Year Spring Warranty
- 1 Year All Other Components

#### **Commercial Aluminum Series**

- 1 Year Hardware Warranty
- 1 Year Finish Warranty
- 1 Year Spring Warranty
- 1 Year All Other Components

#### Insulated Aluminum 5000 Series

- 10 Year Delamination Warranty
- 10 Year Finish Warranty
- 1 Year Hardware Warranty
- 1 Year Spring Warranty
- 1 Year All Other Components

#### Insulated Steel - 800, 2000, 700 & 600 Series

- 10 Year Delamination and Rust-through Warranty
- 35 Year Finish Warranty for Trinar® Colors
- 12 Year Finish Warranty for Plank Colors
- 10 Year Finish Warranty for Solid & Wood Grain Colors
- 1 Year Hardware Warranty
- 1 Year Spring Warranty
- 1 Year All Other Components


#### Ribbed Steel - 2400 & 2500 Series

- 1 Year Rust-through Warranty
- 1 Year Hardware Warranty
- 1 Year Spring Warranty

38

1 Year All Other Components



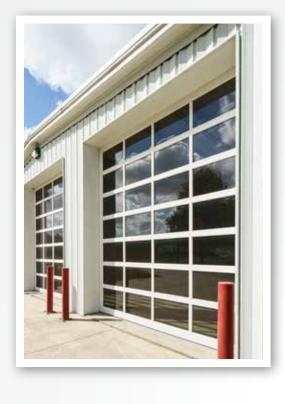

#### www.haasdoor.com/commercial

www.haasdoor.com/architects



#### Non-Insulated



Reed

#### Non-Insulated (Only Commercial Aluminum)







#### Impact Polycarbonate (UV rating on Clear only)





Pebble

39



#### Insulated




Artic/Frosted Reed/Frosted Clear/Low-E Rain/Frosted

#### SELECTVIEW OPTIONS

SelectView allows you to select unique window placements based on the door series and window. SelectView is unique due to the vast amount of options available to suit any need. Whether you're looking to add some character to a ribbed steel commercial building project, or adding more lite into a warehouse renovation, SelectView provides many options to give your project differentiation. Wind Load and impact requirements limit window placements.

- Available in 800, 2000, 700, 600 and **Smooth Ribbed Steel\* Series**
- Multiple window placement options by series and panel styles
- Ranch and Standard Series windows use their matching panel, Carriage House Series windows use Flush panels, SlimLine use Flush and V-Groove panles, and TL lites are available in Flush, V-Groove, and Smooth Ribbed Steel\*
- Available with Specialty Glass and insert options

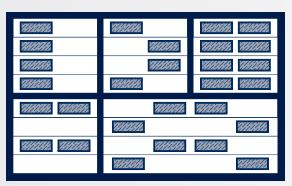

- Insulated and Non-insulated glass options in Carriage House, Ranch, Standard, and TL lites; SlimLine only available in Insulated options
- Standard and Wood Grain color options follow door Series
- Max size 18'2" x 16' More than one lite in the bottom section is limited to 18'2" x 10'0"

#### Carriage House Options

- Add windows to a flush door to create a modern, custom look to fit the style of your building.
- Available in Flush panel models.
- Available with Decorative glass, Specialty glass & inserts.
- Largest glass window size 39 7/16" x 13 5/8".

#### 4 4 4 4 4 4 4 6 \* \* \* \* 4 6 - 4 6 4 6 . 4 . 6 4 2 . 4 4 \* \* \* \* \* 4 2 . 4 6 4 0 . 4 0

#### SlimLine Options

**TL Options** 

- Modern and sleek windows available in Flush or V-Groove panel models.
- Available with single or double lite placement on the section.
- Available with Specialty glass (Not available with Translucent Mirror)
- Window size 40 7/8" x 7".

• Take the ordinary residential or

• Available in Flush, V-Groove,

24" x 6" & 24" x 12" window


sizes, black frame - All other series: 25" x 12" & 24" x 6" window sizes, large window frame matches door color.

• Smooth Ribbed Steel:

commercial door to extraordinary.

and Smooth Ribbed Steel\* models. • Available with Clear or Frosted glass.

• Window frame can be black, or painted to match door color.

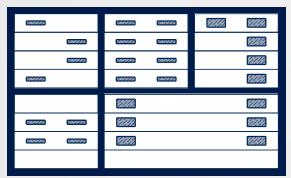

(Possibilities shown above, many more available)






#### **Standard Options**

- Mix windows & standard panels for a unique look.
- Available in Raised Standard stamped panel models.
- Available with Decorative glass, Specialty glass
- 18 3/8" x 11 3/8" window size for 800, 2000, 700 & 600 Series – 17 3/8" x 11 3/8" window size for 2400, 2500 & Smooth Ribbed Steel\* Series.
- 2400 Series are limited to 1 lite in bottom section.



#### **Ranch Options**

- Create curb appeal with windows & panels.
- Available in Raised Ranch stamped panel models.
- Available with Decorative glass, Specialty glass & inserts.
- Window size 39 3/8" x 11 1/2".

(Possibilities shown above, many more available)

<sup>\*</sup>Smooth Ribbed Steel Series are limited to 1 window in bottom section

#### **Standard Series**

Cascade

Models 610, 680, 681, 682, 687, 690, 710, 780, 781, 782, 787, 790, 5710, 5780, 5787

1/8" DSB, 1/8" Tempered 1/2" Insulated Tempered

Models 2010, 2080, 2081, 2082, 2087, 2090, 5210, 5280, 5287 1/2" Insulated

Models C2410, C2410L, C2480, C2480S, C2480L, C2481, C2481L, C2482, C2482L 1/8" DSB, 1/8" Tempered

Cathedral









#### SlimLine

#### Models 710, 712, 5710, 5712 7/8" Insulated Tempered

Outer frame available in Black or painted to match the door color. White inside frame.

Models 610, 612, 2010, 2012, 5210, 5212

1/2" Insulated Tempered Outer frame available in Black or painted to match the door color. White inside frame.




#### Carriage House Series (not available in 18" sections)

Models 610, 612, 660, 661, 663, 664, 667, Models 2010, 2012, 2060, 2061, 2063, 668, 669, 710, 712, 760, 761, 763, 764, 767, 768, 769, 5710, 5712, 5767, 5768

1/8" Tempered

2064, 2067, 2068, 2069, 5210, 5212, 5267, 5268

Models C2410, C2410L, C2460, C2460L, C2461, C2461L 1/8" Tempered

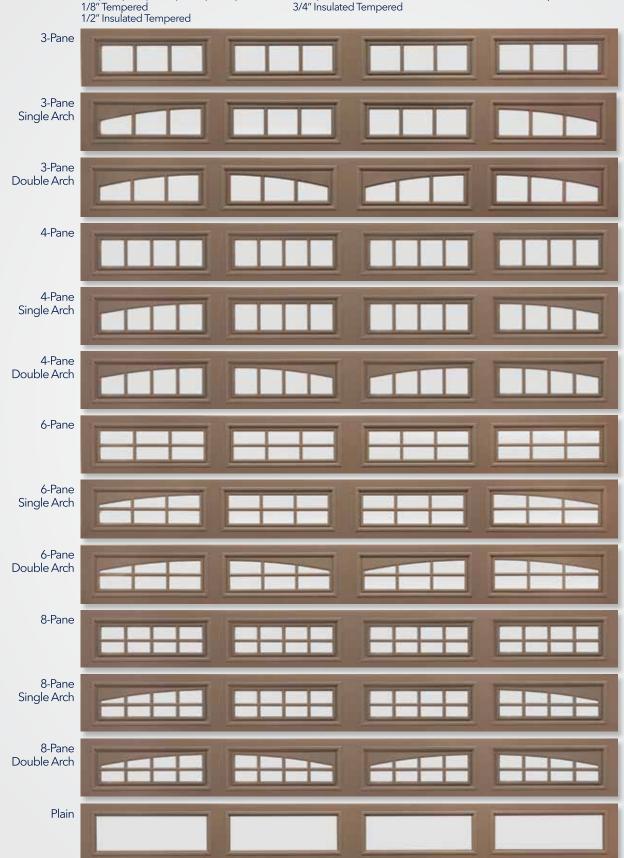

#### **COLOR OPTIONS**

#### **Ranch Series**

Models 610, 670, 671, 672, 673, 674, 678, 679, 710, 770, 771, 772, 773, 774, 778, 779, 5710, 5770, 5778

1/8" Tempered 1/2" Insulated Tempered

Models 2010, 2070, 2071, 2072, 2073, 2074, 2078, 2079, 5210, 5270, 5278 1/2" Insulated Tempered

Models C2410, C2410L, C2470, C2470L, C2471, C2471L, C2472, C2472L 1/8" Tempered











#### **TL Lites**

Models 610, 612, 614, 616, 632, 633, 710, 712, 714, 716, 732, 732-20, 733, 733-20, 750, 751, 5710, 5712, 5714, 5716 1/2" Insulated Tempered - Clear, Frosted or Obscure Models 2010, 2012, 2014, 2016, 2032, 2032-20, 2033, 2033-20, 2050, 2051, 5210, 5212, 5214, 5216 3/4" Insulated Tempered - Clear, Frosted or Obscure Models 814, 816, 832, 832-20, 833, 833-20, 5814, 5816 1 3/4" Insulated Tempered - Clear or Frosted and Obscure for 25" x 12"



TL Lite 25" x 12" (24 7/8" x 10 7/8" viewable) Outer frame matches door color, White inside frame.



in White.

Small TL Lite 24" x 6" (21 1/2" x 3 1/4" viewable) in White. Outer frame available in Black or White. Inside frame only available

#### **Smooth Ribbed Steel Lites**

Models C2011, C2015, C2411, C2415, C2511, C2410 1/8" Tempered - Clear or Frosted Models C2011L, C2011S, C2015L, C2015S, C2415L, C2415S, C2511L, C2511S, C2411L, C2411S, C2410L 3/4" Insulated Tempered - Clear or Frosted



24" x 6" (21 1/2" x 3 1/4" viewable) Outer frame available in Black or White. Inside frame only available



24" x 12" (21 1/2" x 9 1/2" viewable) Outer frame available in Black or White. Inside frame only available in White. Not available for Model C2410 or C2410L.

#### **Solid Steel Colors**



Almond



Trinar® Beige (not available 2400/2500) Bronze\* (not available 2400/2500)



Espresso\* (not available 2500) Gray (not available 2400/2500)

color match, see your Haas Door dealer for a metal color selector.

Sahara Tan

Charcoal\*



Sandstone



Due to the printing process, colors may vary. For the most accurate

Trinar® Brown\* (not available 2400/2500) Brown\*



Carbon Black\* (not available 2500) (Not available in all sizes.)

#### **Insulated Aluminum Color**



Polar White

#### **Plank Steel Colors**







American Walnut Plank



**English Oak Plank** 

<sup>\*</sup> These colors include a cool chemistry paint finish, but is not recommended for projects with extreme exposures to heat and sunlight.

#### Uni-Directional Wood Grain Colors (Only English Oak available in 2400 series. Not available in 2500 series.)



American Walnut Wood Grain Embossed



Graywood Wood Grain Embossed



English Oak Wood Grain Embossed





Ash Wood Grain Embossed



Mahogany Wood Grain Embossed

- These authentic colors feature a wood grain pattern that runs horizontally to compliment any of our insulated steel models.
- The pre-painted wood grain finish is baked on to ensure a durable and long lasting door. Steel wood grain colors feature a 10 year finish warranty.
- Built with 26 gauge galvanized steel that features a wood grain embossment.
- Available in all insulated steel models.

#### Bi-Directional Wood Grain Colors (not available in 2400 & 2500 series)



American Walnut Stucco Embossed



English Oak Stucco Embossed




Ash Stucco Embossed



Mahogany Stucco Embossed

- A vertical wood grain pattern on the panel and stile contrasting with a horizontal pattern on the rails creates the appearance of a real wood door.
- The pre-painted wood grain finish is baked on to ensure a durable and long lasting door. Steel wood grain colors feature a 10 year finish warranty.
- Built with 26 gauge galvanized steel that features a light stucco embossment.
- Available insulated steel models with a stamped panel and Carriage House lites.

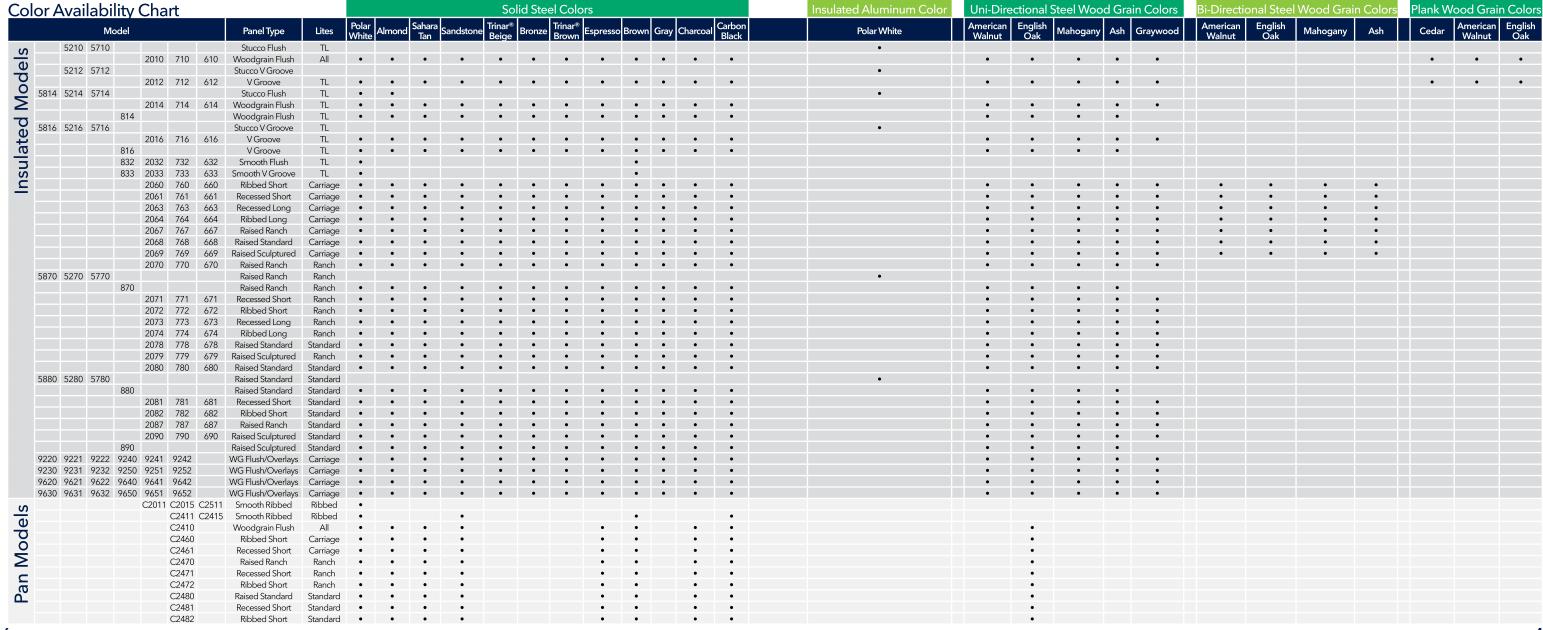

#### Haas Door is Committed to Quality.

As a member of the Door and Access Systems Manufacturers Association (DASMA), Haas Door is committed to industry standards for quality and safety. In addition to these guidelines, Haas Door has developed its own quality assurance procedures.

Each raw material used in the manufacturing process is inspected daily for quality assurance. Steel used on the inside and outside skins is checked for accuracy in thickness and finish. The insulation material, a high density environmentally compliant polyurethane foam, is tested continuously on each production line to ensure that the correct density, blend of material, cure time and tested U-Factors are achieved.

Samples of manufactured doors are tested for quality and durability. Doors are cycled tens of thousands of times to test the performance and endurance of the sections, hinges, springs, cables, rollers, bottom seals, and track. Strength is measured using two separate tests. Individual sections are subjected to a dead load test, and complete doors are wind load tested. This ensures that Haas garage doors will meet wind load requirements for building codes across the country.

Haas continues to perform testing outside of the manufacturing facility, as both prototype and current doors are installed in various locations and monitored for durability. External labs are also used to test specific components to ensure quality standards.

Quality people and quality products are what make Haas Door the best garage door manufacturer in the industry. Open the door to endless possibilities!











#### **Environmental Responsibility**

Haas Door Company manufactures all garage doors in the U.S. and is committed to providing quality products that are safe for our customers and to the environment. Haas garage doors are made from steel that contains 80% recycled material. A plastic thermal break, made with recycled materials, separates each door section to eliminate metal-to-metal contact and the transfer of temperature. Haas also uses environmentally compliant polyurethane insulation, which results in some of the most energy-efficient doors on the market. Good for the environment and saves energy!

Haas Door has also implemented an ongoing improvement plan to gain efficiency and reduce waste, including a recycling program for scrap metal, cardboard and plastic. Many suppliers are regional, which minimizes fuel costs, and material packaging is reused or recycled whenever possible.









Rev. 3.6 ©Haas Door 2025

320 Sycamore Wauseon, OH 43567



