


Color Options

Wood Grain

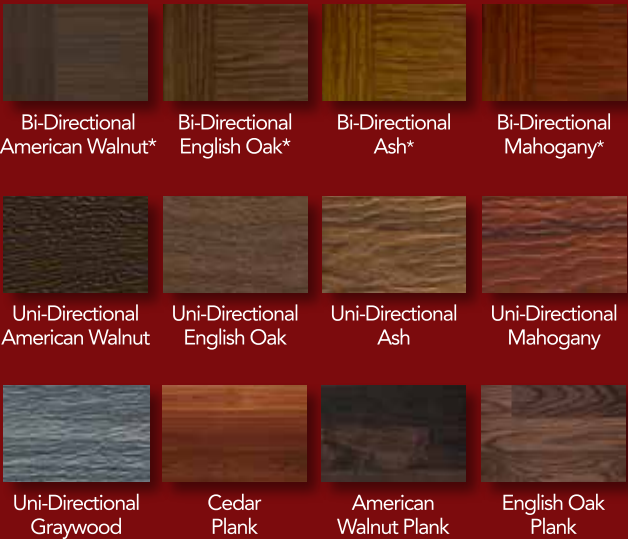

Plank and Bi-Directionals color options feature a light stucco embossment. Uni-Directionals color options feature a wood grain embossment. *Bi-Directional colors are available on 60, 61, 63, and 64 models with or without windows. They are only available on 71, 72, 73, 74, 81 and 82 models without windows.

Solid



**These colors include a cool chemistry paint finish but is not recommended for projects with extreme exposures to heat and sunlight. Due to the printing process, colors may vary. For accurate color samples, contact a Haas Door dealer for a color selector.

Panel Options



Flush Panel Model 2010
All colors except Bi-Directional wood grains
Carriage Windows p25 & 27
Ranch Windows p26 & 27
TL Windows p26
Standard Windows p24 & 27
SlimLine Windows p26



V-Groove Panel Model 2012
All colors except Bi-Directional wood grain & Plank options
Carriage Windows p25 & 27
TL Windows p26
SlimLine Windows p26



Ribbed Short Panel Model 2060
Carriage Windows p25 & 27
Model 2072
Ranch Windows p26 & 27
Model 2082◊
Standard Windows p24 & 27




Recessed Short Panel Model 2061
Carriage Windows p25 & 27
Model 2071
Ranch Windows p26 & 27
Model 2081◊
Standard Windows p24 & 27



Ribbed Long Panel Model 2064
Carriage Windows p25 & 27
Model 2074
Ranch Windows p26 & 27

FEATURES

- 2" Thick with Full Thermal Break
- 0.094 Tested U-Factor with an Air Infiltration Joint Seal that meets IECC Requirements
- Environmentally Compliant Polyurethane Insulation
- 26-Gauge Galvanized Steel
- Available with Wind Load & Impact Options
- Decorative Glass Options (pg 27)
- SelectView Options (pg 22-23)
- 37 Window Options (pg 24-27)
- Industry Leading Warranty (pg 30)
 - Lifetime Rust-Through & Delamination
 - Finish Warranty (pg 30)
 - 6 Year Hardware
 - 3 Year Spring
 - 1 Year All Other Components



2000 series doors include **Air Infiltration Seals**, which exceed the ASHRAE 90.1 Standard when installed with standard bottom seal and commonly available rigid/flexible vinyl door stop. A **Full Thermal Break** is used in the tongue-and-groove construction. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.





**MIAMI-DADE COUNTY
APPROVED**

Florida/Non-Florida
Wind Load
Impact/Non-Impact

Texas/Non-Texas
Wind Load
Impact/Non-Impact

**LIMITED
LIFETIME
WARRANTY**

2010 in cedar plank with slimline windows and selectview option (see pg 22)

2000 Series / 2" thick / 0.094 Tested U-Factor



2073 in polar white with prairie windows



2064 in uni-directional mahogany with 3-pane arch windows, hinges and handles



ing Panel

Windows p25 & 27
◇
Windows p26 & 27



**Recessed Long Panel
Model 2063**

(Not available in 24" sections)
Carriage Windows p25 & 27

Model 2073 ◇
(Not available in 24" sections)
Ranch Windows p26 & 27



**Raised Ranch Panel
Model 2070**

Ranch Windows p26 & 27

Model 2067 ◇
Carriage Windows p25 & 27
Model 2087 ◇
Standard Windows p24 & 27



**Raised Standard Panel
Model 2080**

Standard Windows p24 & 27

Model 2068 ◇
Carriage Windows p25 & 27
Model 2078 ◇
Ranch Windows p26 & 27



**Raised Sculptured Panel
Model 2090**

Standard Windows p24 & 27

Model 2069 ◇
Carriage Windows p25 & 27
Model 2079 ◇
Ranch Windows p26 & 27

◇ = Due to variances in window sizes, not all window and panel stamp configurations align.

Insulated Steel