
Wayne **□**Dalton...

# Residential Garage Doors



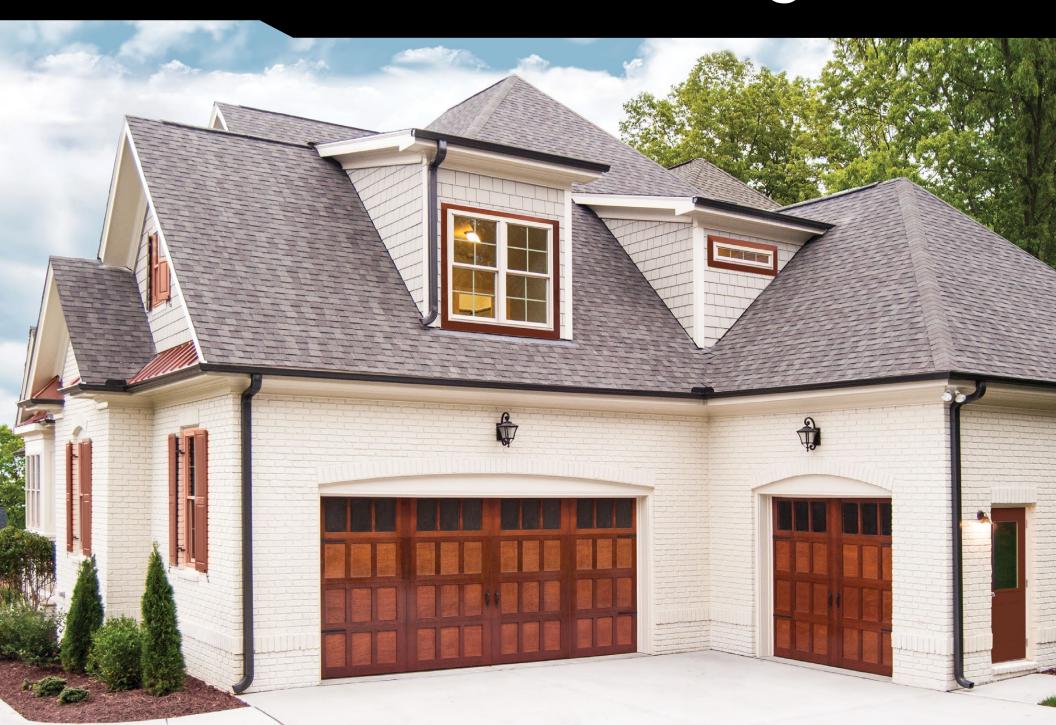

Wayne Dalton has been a trusted leader in the garage door industry since 1954, earning a reputation for innovative design, quality craftsmanship, and dependable customer service. Starting in the heart of Ohio with a focus on wood doors, our legacy of excellence has grown into one of the largest and most diverse residential garage door lineups available today. From award-winning innovations to extensive customization options—featuring panel designs, window styles, and colors to suit any architectural style—Wayne Dalton doors offer unmatched versatility and style. Backed by decades of ingenuity and a commitment to helping dealers succeed, Wayne Dalton continues to set the standard for industry-leading garage door solutions

### GARAGE DOOR FEATURES AND OPTIONS



### Warranty



All Wayne Dalton garage doors are made with superior materials and come with a Limited Warranty.



### Insulation



An insulated garage door can help in controlling the temperature in your garage space. The effectiveness of insulation is expressed in either as a U-factor\* or an R-value\*\*. The lower the U-factor or higher the R-value, the better the insulation in the door. Wayne Dalton offers two types of insulation in our garage doors.

**Polyurethane Insulation** – Foamed-in-place polyurethane insulation delivers twice the thermal performance of polystyrene insulation, as well as adds strength to the door and helps dampen sound transmission. U-factors range from 0.12 to 0.28 and R-values range from 9 to 16.22

**Polystyrene Insulation** – A rigid panel of insulation placed inside the door section, with a maximum R-value of 7.4.



### **Pinch-Resistant Panels**

Select Wayne Dalton models feature pinch-resistant panels, designed to push fingers out of harm's way if accidentally placed near a closing door.



### **Tight Tongue-and-Groove Joint Seals**

Select Wayne Dalton models include snug-fitting tongue-and-groove joint seals that help reduce wind and weather from entering the garage.



### WindSafe® Wind Load Options



Most Wayne Dalton garage doors offer wind load options that comply with one or more of the following agencies: Florida Building Code, Texas Department of Insurance and Miami-Dade County (FL).



### **Impact Wind Load Options**



Select Wayne Dalton garage doors have been approved for impact resistance. Tests show these doors are capable of stopping the direct impact of a 9 lb. 2x4 board at 50 ft. per second.



### TorqueMaster® Plus Counterbalance System

Wayne Dalton's exclusive counterbalance system safely and cleanly contains the garage door springs inside a steel tube. The TorqueMaster® Plus is designed to provide a safeguard against damage or injury that could result from the accidental release of spring tension and features an anti-drop safety device.



### **Bottom Weather Seal**

All Wayne Dalton garage doors feature a vinyl bottom weather seal to help keep drafts and debris from entering the garage.



### TruChoice® Custom Color System



With more than 6,000 colors to choose from, there have never been more choices to coordinate your garage door with your home! This state-of-the-art system uses a multi-step process that mixes each custom color and then bakes the color on for a top-quality factory finish.

<sup>\*</sup>U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

<sup>\*\*</sup>Wayne Dalton uses a calculated door section R-value for our insulated doors.





















	*						
	GOOD		BETTER		BEST		
	MODEL 8000	MODEL 8200	MODEL 9100	MODEL 9605	MODEL 8300	MODEL 8350	MODEL 8500
Construction	Steel	Steel/Insulation	Steel/Insulation/ ToughGard™ backer	Steel/Insulation/ Steel	Steel/Insulation/ Steel	Steel/Insulation/ Steel	Steel/Insulation/ Steel
Insulation*	N/A	Polystyrene, R = 7.4	Polyurethane U-factor: <b>≹</b> 0.26 R-value: 9	Polyurethane U-factor: <b>≹</b> 0.26 R-value: 10 <sup>†</sup>	Polyurethane U-factor: <b>₹</b> 0.15 R-value: 12.12	Polyurethane U-factor: <b>₹</b> 0.15 R-value: 12.12	Polyurethane U-factor: 💸 0.12 R-value: 16.22
TorqueMaster® Plus	•	•	•	•			
Joint Type	Tongue-and- Groove	Tongue-and- Groove	Pinch-Resistant	Pinch-Resistant	Tongue-and- Groove	Tongue-and- Groove	Tongue-and- Groove
WindSafe® Options	•	•	•	•	•	•	•
Impact Options	•	•	•	•	•	•	•
Warranty	10-Year Limited	10-Year Limited	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime


<sup>\*</sup>U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.


†R-value = 10 at 8' high. R-value may differ slightly for other heights.















## **Choose Your Color**

### **Painted Finishes (Standard)**











**Choose Your Windows** 













4 1/2

Sherwood I

Prairie II

**Arched Stockton** 

Prairie I

Clear II


Not all window styles available on all panel designs. Window configuration may vary depending on door size.

See Dealer or website for complete window selection.






Vertical Long



Short



Vertical Short



Flush

## **Choose Your Color**

### Painted Finishes (Standard)



White



Almond



Sandstone



Gray



Brown



Black

### **Premium Finish**



### **Choose Your Windows**









Stockton Long (8-Lite)



Prairie Long





Stockbridge Long (4-Lite)



Arched Stockton

 $\Diamond \Diamond \Diamond \Diamond \Diamond$ 



Stockton Short





**Prairie Short** 




Not all window styles available on all panel designs. Window configuration may vary depending on door size. See Dealer or website for complete window selection.








## 8300 & 8500

## **Choose Your Style**











## **Choose Your Color**

### Painted Finishes (Standard)





























Plank

Stucco embossment (Available on Models 8300/8300AG Flush panel only)



Plank

Medium Oak Cedar



Plank



Plank



Black

Plank

Clear Long

Cathedral Short

Model 8300, Long panel, Bi-Directional Carbon


Oak finish, Clear Long windows





**Prairie Short** 

Stockbridge Long (4-Lite)



Stockton Long (8-Lite)

Arched Stockton







Narrow

**Double Narrow** 

**Premium Finish** 







Not all window styles available on all panel designs. Window configuration may vary depending on door size. See Dealer or website for complete window selection.







Wood Grain Impressions™ Bi-Directional Finishes







Medium Oak











Flush Panel Silver



Dark Bronze



Black Frost

## **Choose Your Windows**



Clear Long



Double Narrow



Clear Short






Narrow







## **Panel Style**



Ridgefield Riverton

3-section styling on 7' high doors. Number and height of sections will vary depending on door height.

MODEL 8310					
Construction	Steel/Insulation/Steel				
Insulation	Polyurethane, U-factor* <b>%</b> = 0.15 R-value** = 12.12				
TorqueMaster® Plus	•				
Joint Type	Tongue-and-Groove				
TruChoice®	•				
Warranty	Limited Lifetime				

## **Choose Your Color**

### Painted Finishes (Standard)







Desert Tan





Gray



Sandstone



Terra Bronze



Brown



Black

## **Choose Your Windows**







Stockton (6-pane)





Wyndbridge (3-pane)



Stockbridge (3-pane)



Stockton (8-pane)









Window configuration may vary depending on door size. See Dealer or website for complete window selection.



Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Dealer for accurate color matching.

<sup>\*</sup>U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

<sup>\*\*</sup>Wayne Dalton uses a calculated door section R-value for our insulated doors.






	GOOD	BETTER	BEST
	MODEL 9405	MODEL 8670	MODEL 8600
Construction	Steel/Insulation/Steel	Steel/Insulation/Steel	Wood Overlay/Steel/Insulation/Steel
Insulation	Polyurethane, U-factor* <b>₹</b> = 0.27 R-value** = 10	Polyurethane, U-factor* <b>₹</b> = 0.16 R-value** = 10	Polyurethane, U-factor* <b>≋</b> = 0.15 R-value** = 12.12
TorqueMaster® Plus	•	•	
Joint Type	Pinch-Resistant	Tongue-and-Groove	Tongue-and-Groove
TruChoice®	•	•	
WindSafe® Options	•		•
Impact Options	•		•
Warranty	Limited Lifetime	Limited Lifetime	Limited Lifetime

<sup>\*</sup>U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.
\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.





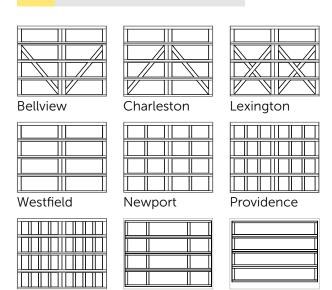

Hampton

Camden

### **Choose Your Color**

### **Painted Finishes**



White (Standard)










**Premium Finish** 



**Choose Your Windows** 











Stockbridge

Stockton III







Arched Stockton

Waterton III

Window configuration may vary depending on door size.





**Two-Toned Painted Finishes** 

Brown



Green





Oak Park



## **Choose Your Color**

### **Painted Finishes**







White (Standard) Clav

Gray

Green

**Stained Finishes** 











Natural Oak

Red Oak

**Premium Finish** 




Honduran Mahogany

Walnut

Green

Model 8670 doors are hand stained for a natural look.


### **Choose Your Style**



Oak Park



Hampton











White/Clay


White/Gray

**Choose Your Windows** 



















Plain Window Square

16 Window Square





Plain Window Arched





12 Window Arched


16 Window Arched

Window names reflect number of panes. Window configuration may differ depending on door size. See Dealer or website for complete window selection.





Brunswick

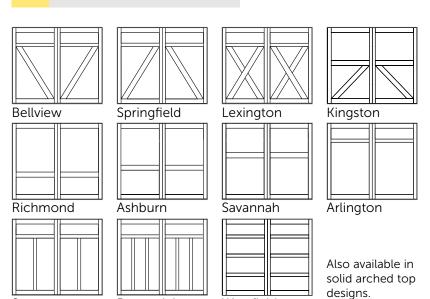

Westfield

## **Choose Your Color**

### Painted Finishes (Standard)



White/White



White/Sandstone



White/Almond



White/Terra Bronze



**Choose Your Windows** 



Clear Long



Somerton



Stockbridge



Stockton



Stockton Arch

Wyndbridge

Window inserts are also available. Window configuration may differ depending on door size. See Dealer or website for complete window selection.






Somerset










Horizontal Raised



Sonoma



Raised

Horizontal V-Groove

Panel designs have a distinct wood grain pattern. See website for details.

## **Choose Your Color**



Natural Oak





Cherry







Mahogany



Realistic wood detail

MODEL 8680					
Construction	Fiberglass/Steel/ Insulation/Steel				
Insulation	Polyurethane, U-factor*:				
TorqueMaster® Plus	•				
Joint Type	Tongue-and-Groove				
Warranty	Limited Lifetime				

<sup>\*</sup>U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

## **Choose Your Windows**



Plain Lite



8 Lite



16 Lite





6 Lite



12 Lite



20 Lite



Vertical Raised

Window names reflect number of panes. Not all windows available for all panel designs. Window configuration may vary depending on door size. See Dealer or website for complete window selection.





Red Oak

Green

<sup>\*\*</sup>Wayne Dalton uses a calculated door section R-value for our insulated doors.

# Sleek and Modern Contemporary homes deserve a garage door as modern as they are. Designed with clean lines and offered in a variety of finishes, Wayne Dalton's Contemporary Aluminum Collection is the ultimate in sleek and modern garage door design.





	MODEL 8800	MODEL 8850	MODEL 8855	MODEL 8450
Construction	Aluminum with Reinforcing Fins	Aluminum with Reinforcing Fins	Aluminum with Reinforcing Fins	Aluminum with Reinforcing Fins
Frameless Glass	N/A	N/A	N/A	•
Insulation	Optional Polyurethane, U-factor*≹ as low as .27 R-value** up to 4.36	Optional Polyurethane, U-factor* <b>≋</b> as low as .28 R-value** up to 4.36	Optional Polyurethane, U-factor*≹ as low as .28 R-value** up to 4.36	N/A
Joint Type	Tongue-and-Groove	Tongue-and-Groove	Tongue-and-Groove	Tongue-and-Groove
RAL Powder Coat	•	•	•	N/A
Warranty	5-Year Limited	1-Year Limited	1-Year Limited	1-Year Limited

<sup>\*</sup>U-factor is independently tested and verified per ANSI/DASMA 105 using doors with full glazing and specific product sizes.
\*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.





## **Choose Your Frame Color**

### **Powder Coated Finishes (Standard)**





Bronze

Black

### **Anodized Finishes (Optional)**





**Bronze** 

## **Choose Your Glass**







Mirrored Bronze



Translucent Black







Opaque Black

Black





## **Choose Your Frame Color**

### **Anodized Finishes**







Clear (Standard) Bronze







White (8800 only) Black



wind SAFE For Model 8855 only

**Choose Your Glass** 










Clear (Standard)





Green Tinted

**Gray Tinted** 

**Bronze Tinted** 

Satin Etched

White Laminated




Obscure









MODEL 8700						
Construction	Vinyl/Insulation/Vinyl					
Insulation	Polyurethane, U-factor* <b>≋</b> = 0.24 R-value** = 11.75					
TorqueMaster® Plus	•					
Joint Type	Tongue-and-Groove					
WindSafe® options	•					
Warranty	15-Year Limited					

## **Choose Your Color**



Glacier White







Monterey Sand

## **Choose Your Windows**







Williamsburg I

Ruston

Window configuration may vary depending on door size. See Dealer or website for complete window options.



<sup>\*</sup>U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes. \*\*Wayne Dalton uses a calculated door section R-value for our insulated doors.

### **Stunning Craftsmanship**

Wood garage doors are the ideal choice for homes of distinction, offering a refined elegance that only premium wood materials can achieve. Our craftsmen hand-build these beautiful wood doors with thorough attention to detail for a truly remarkable garage door.







	GO	OD	BETTER BEST		ST
	MODEL 40	MODEL 100	MODEL 300	MODEL 7100	MODEL 7400
Construction	Wood/Insulation/Wood	Wood overlay/Wood	Wood/Insulation	Wood overlay/Wood panel/Wood backer	Wood overlay/Wood panel/Insulation/Wood backer
Design	Flush	Recessed Panel	Raised Panel	Carriage House	Carriage House
Insulation*	Polystyrene, R = 4.75	N/A	Polystyrene, R = 7.4	Optional Polystyrene, R = 4.75	Polystyrene, R = 4.75
Section Thickness	1- <sup>3</sup> /8" to 1- <sup>5</sup> /8"	1-3/8"	1-3/8"	1-5/8"	2"**
Unfinished Paint Grade	•	•	•	•	•
Unfinished Stain Grade	•		•	•	•
WindSafe® Options				•	•
Warranty	1-Year Limited	1-Year Limited	1-Year Limited	1-Year Limited	1-Year Limited

<sup>\*</sup>Wayne Dalton uses a calculated door section R-value for our insulated doors.
\*\*Thickness may vary slightly depending on wood type.



## 1 Choose Your Wood



Rough Sawn Plywood



Smooth Plywood



T1-11 Plywood



Marine Grade

## **2** Choose Your Windows



Cathedral\*



2 Panel – 2 over 2



2 Panel - 4 over 4



Real Sunray



4 Panel - 2 over 2



2 Panel – 5 over 5



False Sunray\*



2 Panel – 3 over 3


Windows shown for 1 car panel designs. Not all window will fit all door sizes. Factory will advise if there is a problem with fitting. \*Molded designs with plastic inserts may not fit all panel sizes.

Consult your distributor for availability.



Single-car door designs. (optional windows shown).







**Choose Your Wood** 







Smooth plywood

### **Choose Your Windows**







Plain Short Panel



Plain Long Panel




Stockton\*



Window configuration may vary depending on door size. \*Other Stockton windows are available. Not all windows are available in all sizes. Consult your Dealer for details.

### **Double-car door designs.** (optional windows shown).






Classic Wood



## **Choose Your Style**

### **Panel Designs**

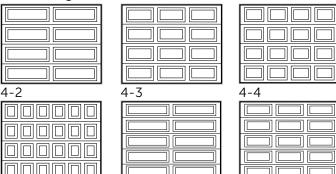

Double-car designs look like two single-car doors together.

## **Choose Your Wood**

Cedar\*



Hemlock









Ruston

Bachelor



Sunray

## **Choose Your Windows**

### **Wood Window Inserts**





Cathedral



Sherwood



**True Divided Windows** 



Colonial Stockton



**Elongated Stockton** 

5-6

4-6

Window configuration may vary depending on door size. Not all windows available on all models. See Dealer or website for details.



# Carriage House Wood




7100 Mustang, 32 Lite Square windows

## **Choose Your Style**



Palomino Wide



Clydesdale



Stallion Narrow



Palomino Narrow

Model 7100, Mustang panel, 6 Lite Arched windows



Mustang



**Appaloosa** Grooved



Clydesdale Grooved



Stallion Wide



**Appaloosa** 

## **Choose Your Wood**



Cedar



Western Red Hemlock





Marine Grade





Douglas Fir



Sapele

Rough Sawn Luan Meranti Plywood

Window names reflect number of panes. Window configuration may vary depending on door size. See Dealer or website for complete window selection.

Plywood

### **Choose Your Windows**

### Square Top True Vertical Divided



4 Lite



6 Lite



8 Lite





4 Lite



6 Lite



8 Lite

### **Square Top**



8 Lite



12 Lite



16 Lite

### **Arched Top**

True Cross Divided



8 Lite



12 Lite



16 Lite

Carriage House Wood







7400 Derby, 16 Lite Arched windows, Decorative hardware


## **Choose Your Style**




Remington








Belterra



DelMar



Churchill

## **Choose Your Wood**



Saratoga



**Preakness** 



Western Red Hemlock Cedar




Meranti



Marine Grade





Sapele

Mahogany

Luan Meranti Plywood

Window names reflect number of panes. Window configuration may vary depending on door size. See Dealer or website for complete window selection

Plywood

Rough Sawn

### **Choose Your Windows**

### **Square Top**



4 Lite



6 Lite



8 Lite





4 Lite





8 Lite

**Square Top** 

True Cross Divided



8 Lite



12 Lite



16 Lite

### Arched Top

True Cross Divided



8 Lite



12 Lite



16 Lite

<sup>3-</sup>section styling on 7' high doors. Number and height of sections will vary depending on door height. Panels above also available in arch top designs.









Discover the perfect garage door for your home with Wayne Dalton's interactive Garage Door Design Center. Upload a photo of your home, experiment with panel designs, colors, window styles, and decorative hardware, and instantly visualize the transformation. Try it today by scanning the QR code or visiting wayne-dalton.com—your journey to enhanced curb appeal starts with just a click!



## Wayne Dalton.

2501 S. State Hwy. 121 Bus., Ste 200 Lewisville, TX 75067

wayne-dalton.com













Wayne Dalton participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional garage doors. The lower the U-factor rating, the better the thermal performance.



Symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.

THERMAL PERFORMANCE