

MJK, Inc.


M2530 Series

Permanent Magnet DC Gear motor

Motor Specification

Type	Rated DC Voltage (V)	No-Load speed (RPM)	No-Load Current (A)	Rated speed (RPM)	Rated current (A)	Rated Torque g-cm	Rated Power (W)	Stall Torque g-cm	Stall Current (A)
M2530-09A	9	5500	0.1	4800	0.300	20	1.1	130	1.2


Motor Gearbox Dimensions

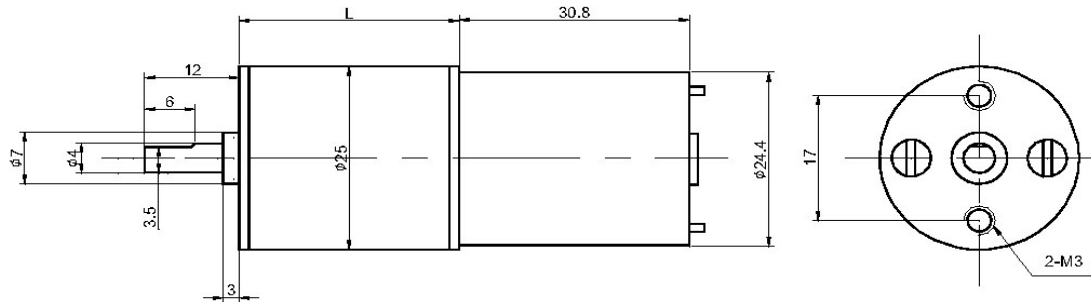

Gear box length (L) 23mm

Type	Rated DC Voltage (V)	No-Load speed (RPM)	Reduction Ratio	Number of stages	Rated speed (RPM)	Rated Torque g-cm	Max Intermittent Torque	Stall Torque g-cm	Direction of rotation
M2530-S25A81	9	75	81 : 1	5	59	1076	4 kg.cm	7000	CCW

Technical Data

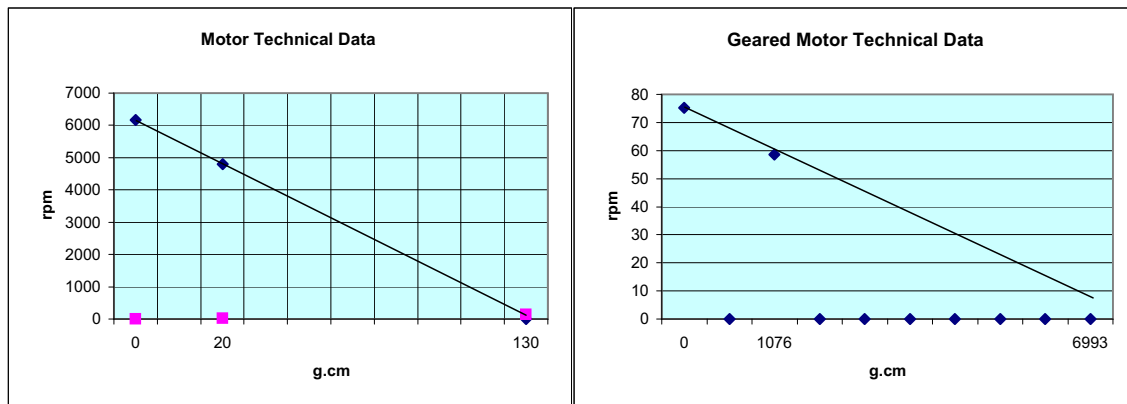

Temperature range -10 ~ +50 °C
 Bearings Type Sleeve
 Humidity > 85% (25°C)

MJK, Inc.

396 Chase PKWY, Waterbury, CT 06708 USA
 Telephone (203) 596-1258 Fax (203) 757-1724
www.mjkinco.net Email inquiry@mjkinco.net