


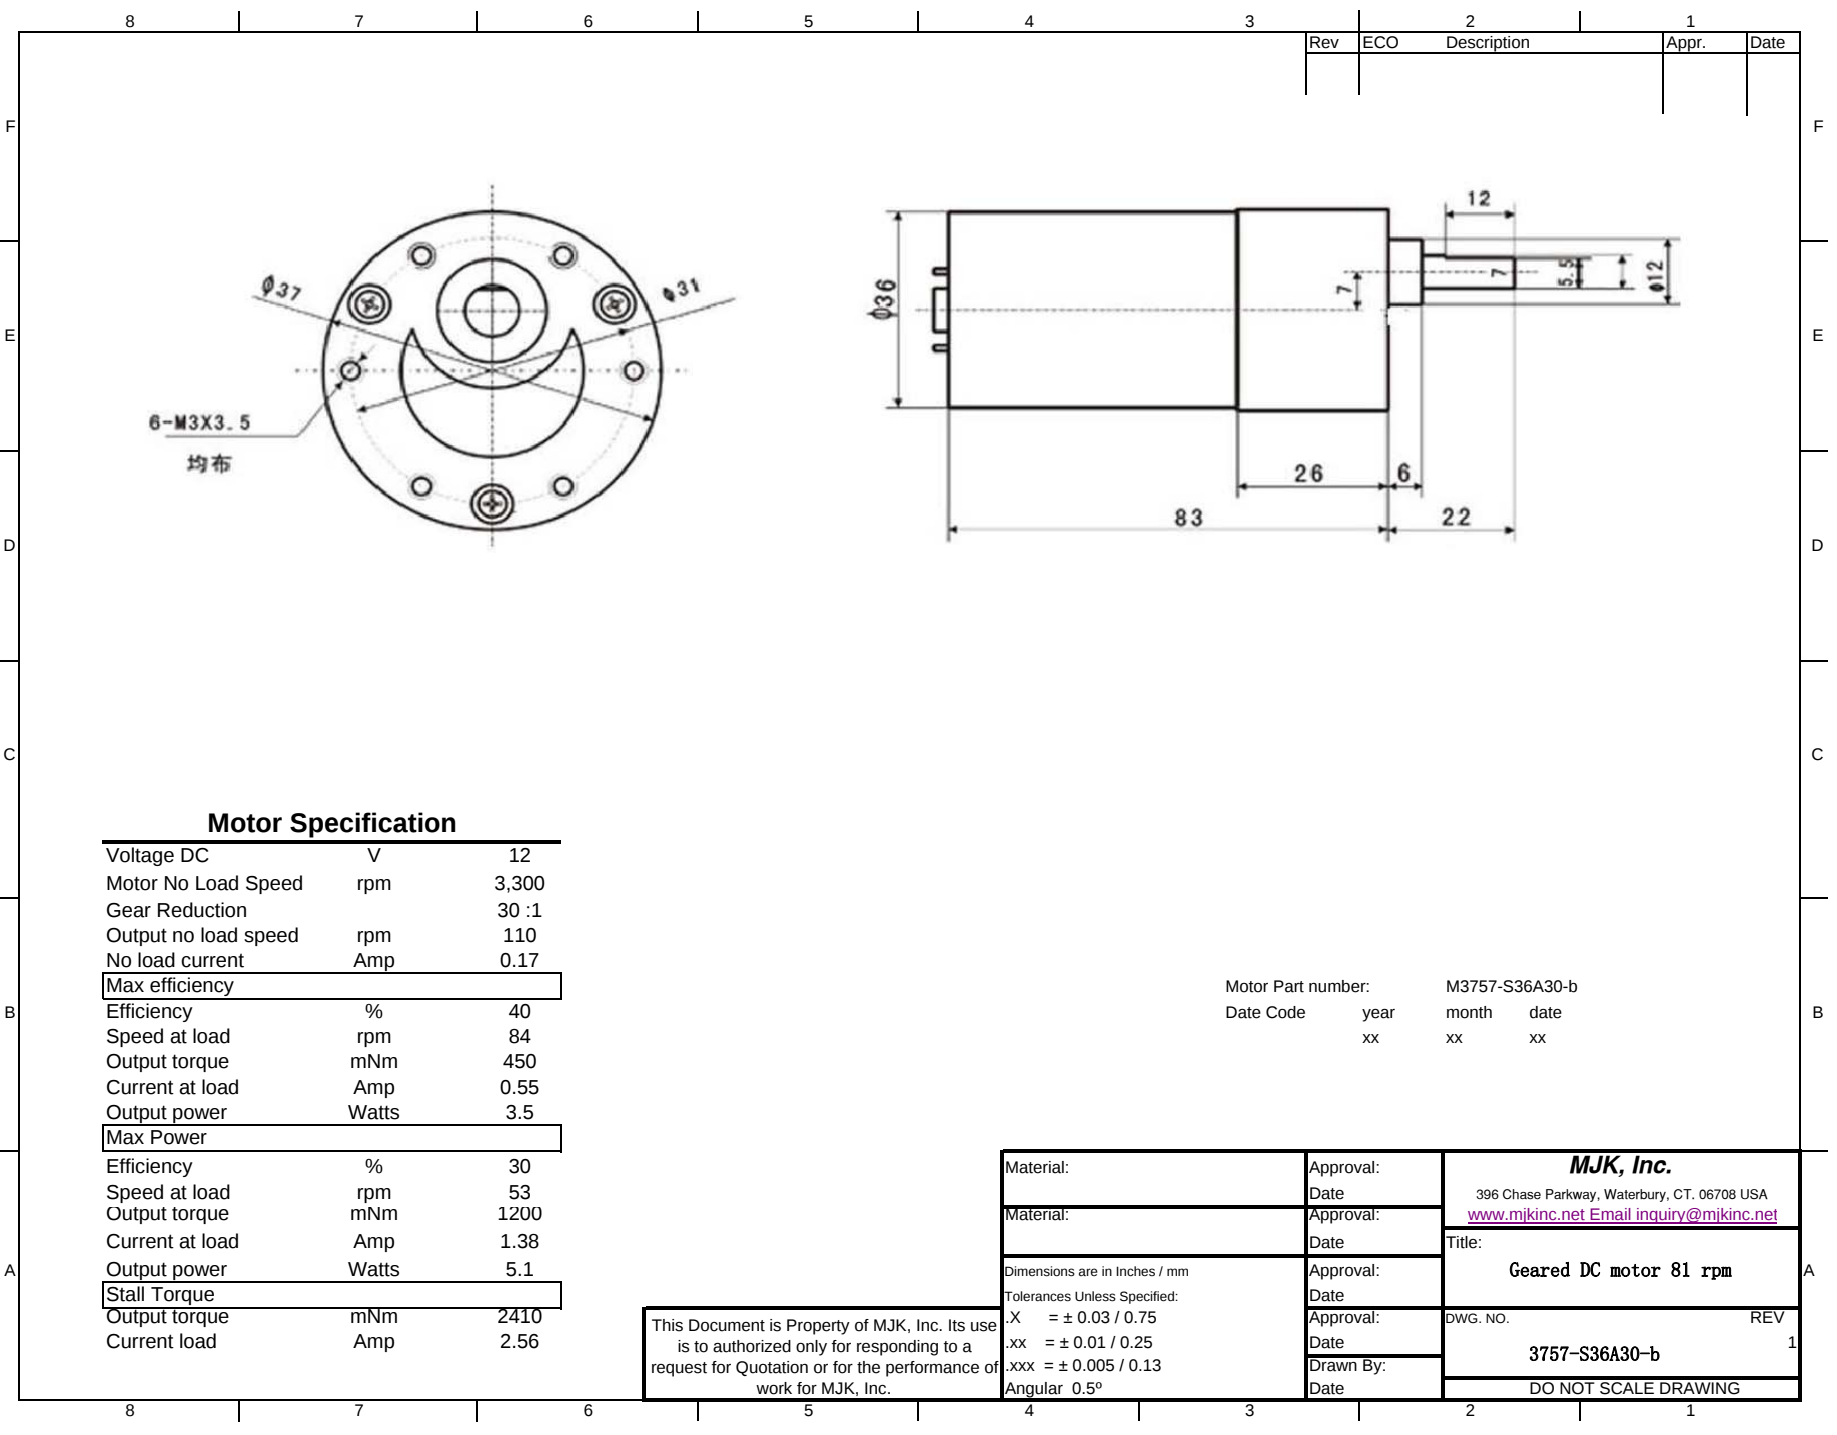

6-M3X3.5

均布

Motor Specification

Voltage DC	V	12
Motor No Load Speed	rpm	3,300
Gear Reduction		30 :1
Output no load speed	rpm	110
No load current	Amp	0.17
Max efficiency		
Efficiency	%	40
Speed at load	rpm	84
Output torque	mNm	450
Current at load	Amp	0.55
Output power	Watts	3.5
Max Power		
Efficiency	%	30
Speed at load	rpm	53
Output torque	mNm	1200
Current at load	Amp	1.38
Output power	Watts	5.1
Stall Torque		
Output torque	mNm	2410
Current load	Amp	2.56

Motor Part number: M3757-S36A30-b
Date Code year month date
xx xx xx

Material:	Approval:	MJK, Inc. 396 Chase Parkway, Waterbury, CT. 06708 USA www.mjinc.net Email inquiry@mjinc.net	
Material:	Approval:		
	Date	Title:	
Dimensions are in Inches / mm	Approval:	Geared DC motor 81 rpm	
Tolerances Unless Specified:	Date		
.X = ± 0.03 / 0.75	Approval:	DWG. NO.	REV
.xx = ± 0.01 / 0.25	Date	3757-S36A30-b 1	
.xxx = ± 0.005 / 0.13	Drawn By:	DO NOT SCALE DRAWING	
Angular 0.5°	Date		

This Document is Property of MJK, Inc. Its use is to authorized only for responding to a request for Quotation or for the performance of work for MJK, Inc.