



DAB18RT

This articulated platform has a very low centre of gravity to optimise its performance. It is equipped with a fuel-saving diesel engine and 4 drive wheels integrated into the axle for improved offroad performance. The boom folds for transport so that the vehicle can be shipped in a container.

STANDARD EQUIPMENT

- Proportional controls
- Thumb rocker steering
- Flashing light
- Horn
- Hour counter
- Harsh Environment Kits
- 12V DC Auxiliary Power

PERFORMANCE

- Front oscillating axles to match the terrain irregularities granting optimal adherence to the ground
- 2 Wheels Steering
- Four-wheel drive
- Positive traction four wheel drive
- 360° rotation (continuous)

ENGINE

- Stage V engine (Stage IIIA available upon request)
- Auto Engine Fault Shutdown
- Anti-reverse Engine Device
- Anti-restart Engine Protection
- Hydraulic oil radiator

BASKET

- Self levelling platform
- Rotating basket +/-90°
- Power to platform

SAFETY

- Drive enable system
- Platform load sense system
- On-board diagnostics system
- Tilt indicator with alarm
- Crushing protection
- Emergency lowering system

STANDARD EQUIPMENT



Construction



Large Events



Aircraft
maintenance
Ship repair



Plant
Service



Oil & gas



Restoration

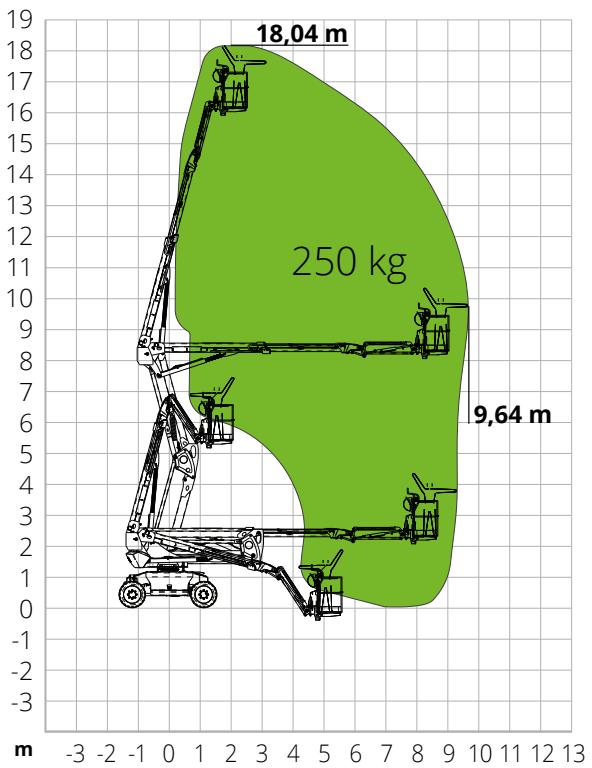
DAB18RT

Max. working height	18.04 m
Max. basket height	16.04 m
Articulation point	8.23 m
Max. reach	9.64 m
Below-ground height	1.30 m
Below-ground reach	8.23 m
Max. platform load capacity	250 kg
Max. Occupants	2
Max. gradeability (stowed)	40%
Max. working slope	X-5°/Y-5°
Max. wind speed	12.5 m/s
Turning radius (outside)	4.49 m
Turning radius (inside)	2.92 m
Turret rotation (continuous)	360°
Jib type	Regular
Jib length	4.20 m
Jib vertical rotation	132°
Basket width	0.79 m
Basket length	1.83 m
Basket rotation	180°
Total weight	7,920 kg
Travel speed (closed config.)	6.0km/h
Travel speed (working config.)	1.1km/h
Tyres	315/55 D20
Engine	Kubota D1105/18kW
Diesel tank capacity	115 l
Hydraulic tank capacity	145 l
Emergency power system	-
Transmission	Hydrostatic

STANDARDS COMPLIANCE: EN 280, ANSI/SAIA A92.20

#LIFT DIFFERENT
www.magnith.com


The data in this brochure are provided for the purposes of information and subject to change without notice.

LOAD CHART

DIMENSIONS

A	Platform length	7.41 m
	Platform length (transport)	5.57 m
B	Platform width (tyres)	2.33 m
	Platform width (transport)	2.33 m
C	Platform height	2.55 m
	Platform height (transport)	2.63 m
E	Wheelbase	2.30 m
	Tailswing	0.19 m
D	Ground clearance	0.31 m

