

Mymesh Product Sheet

Connect any light, anywhere.

MYMESH-4 INPUT

Push Button Control suitable for use with Mymesh controls

(Input: 100-240 Vac 50/60Hz)

MYMESH-4INPUT is designed to control the brightness and colour temperature of lighting loads controlled by Mymesh dimmable devices. Configurable via the Mymesh App.

MYMESH-4INPUT is suitable for installing in the back of a wallbox, up to 4 push buttons (push on, push off, hold to dim).

Installation:

To be installed by a competent person with reference to BS 7671 or equivalent local standards. If in doubt consult a qualified electrician. All wires must be treated as mains potential.

- Plan where the MYMESH- 4INPUT is to be located. Switch off supply and check for hidden cables and pipes.
- The MYMESH-4INPUT should be connected as shown in diagrams 1.
L - Live in. N - Neutral in. C-Common. S1-Input1. S2-Input2. S3-Input3. S4-Input4.
- Wall box depth - 25mm minimum.

Operation:

As configured via the Mymesh App.

Precautions:

- Ensure wires and cables are securely held within the connection terminals or terminated in an insulated terminal block.
- Please ensure the most recent edition of the appropriate local wiring regulations are observed and suitable protection is provided e.g. 6 amps over current, 1kV over voltage.
- Disconnect the MYMESH-4INPUT from the circuit before performing insulation testing of the wiring circuit.




5 YEAR WARRANTY

MYMESH-4INPUT comes with a 5 year warranty from the date of manufacture and is CE marked.



MYMESH-4INPUT: Technical Specifications

DIAGRAM 1:
Wiring:

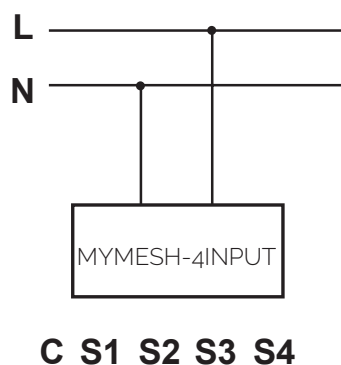

Technical details:

INPUT	
Voltage:	100 - 240Vac
Frequency:	50/60Hz
Max. mains current:	20mA
Standby current:	16mA
RADIO TRANSCEIVER	
Operating frequencies:	2.4... 2.483 GHz
Max. output power:	+4 dBm
OPERATING CONDITIONS	
Ambient temperature:	-20... +50 °C (lout 20mA)
Storage temperature:	-25... +75 °C
Max. relative humidity:	0... 80%, non cond.
CONNECTIONS	
Wire size:	1mm ² solid
Wire strip length:	6-7mm
Wire lenght:	15cm
MECHANICAL DATA	
Dimensions:	40mm x 40mm x 20mm
Weight:	30g (unpacked)
Degree of protection:	IP20
Protection class:	Basic
Material (casing)	ABS
Finish / Colour	Black (RAL 9005)
CONFORMITY AND STANDARDS	
EMC emission: EN60669-2-1:2004 inc. A12:2010	
EMC immunity: EN60669-2-1:2004 inc. A12:2010	
Safety: EN60669-2-1:2004 inc. A12:2010	
Environment: Complies with WEEE and RoHS directives	