




Strada Panealba, 2 - 10040 Volvera (TORINO) ITALY  
Tel. 0039.011. 990.60.60 - (4 linee r.a.) FAX. 0039.011.985.90.73  
[www.logansrl.it](http://www.logansrl.it) e-mail [info@logansrl.it](mailto:info@logansrl.it)

**OPTICAL**  
**INCREMENTAL ENCODER**

**EN5036**

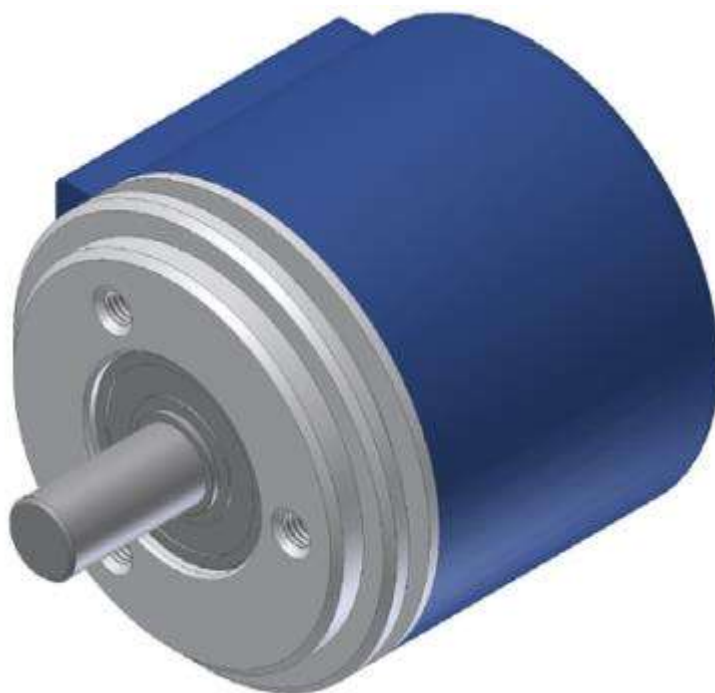

**TECHNICAL DATASHEET**




Strada Panealba, 2 - 10040 Volvera (TORINO) ITALY  
 Tel. 0039.011. 990.60.60 - (4 linee r.a.) FAX. 0039.011.985.90.73  
 www.logansrl.it e-mail info@logansrl.it

## OPTICAL ENCODER EN5036

### GENERAL FEATURES

- Optical rotary encoder.
- Bi-directional signals with zero pulse.
- Flange and body made of aluminium.
- Output by connector or cable (with sealing fairlead), radial or axial.

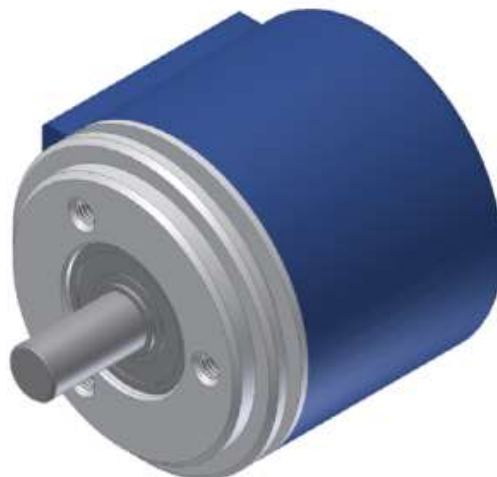

### MECHANICAL AND ELECTRICAL FEATURES

#### MECHANICAL

- Flange and body made of aluminium.
- Shaft made of stainless steel.
- Ball bearings with special high-sealed screens.
- High protection even in harsh environmental conditions.

#### ELECTRICAL

- Protection against short circuits.
- Protection against inversion of polarity.
- High stability of output signals.
- Reading device with an infra-red light emitter and receiving photodiodes.
- A and B output signals with phase displacement of 90° electrical.

| Code EN5036                            | PP                                                                      | LD                    | OC             |
|----------------------------------------|-------------------------------------------------------------------------|-----------------------|----------------|
| Pulses per revolution                  | 5 to 64000 ppr                                                          |                       |                |
| Max. rotating speed                    | momentary<br>permanent                                                  | 12000 rpm<br>8000 rpm |                |
| Max. load on shaft                     | 100 N (radial) – 100 N (axial)                                          |                       |                |
| Shaft (diameter A x length L) mm       | Ø6x10-ø8x20 -ø9.52x20 -ø10x20<br>others on request                      |                       |                |
| Protection class                       | IP65 (standard) *<br>IP67 (optional)                                    |                       |                |
| Operating temperature                  | 0 ÷ 70°C                                                                |                       |                |
| Storage temperature                    | -20 ÷ 80°C                                                              |                       |                |
| Relative humidity                      | 20 ÷ 90% (not condensed)                                                |                       |                |
| Power supply                           | 5 V ± 5%<br>5 ÷ 28 V ± 5%                                               |                       |                |
| Max. consumption at 5 V (with no load) | 25 mA                                                                   |                       |                |
| Max. output current (each channel)     | 30 mA                                                                   |                       |                |
| Max. frequency                         | 300 kHz                                                                 |                       |                |
| Output                                 | Push-Pull                                                               | Line Driver           | Open Collector |
| Standard length of cable               | 1 m                                                                     |                       |                |
| Electrical connections                 | see the rel. table                                                      |                       |                |
| Electrical protection                  | inversion of power supply polarity<br>and short circuits on output port |                       |                |
| Weight (according to model)            | 280 ÷ 340 g                                                             |                       |                |

\* It is important to note that shaft rotates more freely in the version with protection class IP65.

### ORDERING CODE

| MODEL  | CABLE/CONN.<br>OUTPUT | ACCURACY | PPR   | POWER SUPPLY | SHAFT Ø | CABLE / CONN. | OUTPUT | CONNECTION | OPTIONS |
|--------|-----------------------|----------|-------|--------------|---------|---------------|--------|------------|---------|
| EN5036 | HR                    | S        | xxxxx | 05V          | D06     | CE            | PP     | 2          | V2      |

HR = radial  
HA = axial

No code =  
standard  
S = special

05V = 5V  
0528 = 5÷28V

D06 = Ø6 mm  
D08 = Ø8 mm  
9.52 = Ø9.52 mm  
D10 = Ø10 mm

M.5 = 0.5m  
M01 = 1m  
CE = 7P Amph.  
CF = 10P Amph.  
CG = 12P Connei

LD = LINE DRIVER  
PP = PUSH-PULL  
ON = OC NPN  
OP = OC PNP

C = cable  
n = no. wiring

No code = .  
standard  
configuration  
V2 =  
protection  
class IP67

Example OPTICAL ENCODER EN5036 HRS 01000 05V D06CE PP2 V2



Strada Panealba, 2 - 10040 Volvera (TORINO) ITALY  
 Tel. 0039.011. 990.60.60 - (4 linee r.a.) FAX. 0039.011.985.90.73  
 www.logansrl.it e-mail info@logansrl.it


## CABLE AND ELECTRICAL CONNECTIONS

| Cable 8 cores $\varnothing = 6.5$ mm, PVC external sheath<br><b>Wires section:</b><br>- for power supply: $0.5 \text{ mm}^2$<br>- for signals: $0.14 \text{ mm}^2$<br><br>Cable 5 cores $\varnothing = 5.4$ mm, PVC external sheath<br><b>Wires section:</b><br>- for power supply: $0.22 \text{ mm}^2$<br>- for signals: $0.14 \text{ mm}^2$ | PP / OC |             | LD        |             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------------|-----------|-------------|
|                                                                                                                                                                                                                                                                                                                                               | SIGNAL  | WIRE COLOUR | SIGNAL    | WIRE COLOUR |
|                                                                                                                                                                                                                                                                                                                                               | A       | Green       | A         | Green       |
|                                                                                                                                                                                                                                                                                                                                               | B       | White       | B         | White       |
|                                                                                                                                                                                                                                                                                                                                               | Z       | Brown       | Z         | Brown       |
|                                                                                                                                                                                                                                                                                                                                               |         |             | $\bar{A}$ | Orange      |
|                                                                                                                                                                                                                                                                                                                                               |         |             | $\bar{B}$ | Light Blue  |
|                                                                                                                                                                                                                                                                                                                                               |         |             | $\bar{Z}$ | Yellow      |
|                                                                                                                                                                                                                                                                                                                                               | V+      | Red         | V+        | Red         |
|                                                                                                                                                                                                                                                                                                                                               | GND     | Blue        | GND       | Blue        |
|                                                                                                                                                                                                                                                                                                                                               | $\perp$ | Shield      | $\perp$   | Shield      |

NOTES:

Do not exceed the minimum cable bending radius of 30 mm.

## SHIELDED CABLE

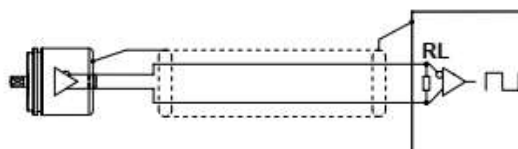


### LINE DRIVER CONNECTION

| POWER SUPPLY | RL            |
|--------------|---------------|
| 5 V          | 120 $\Omega$  |
| 12 V         | 330 $\Omega$  |
| 24 V         | 1000 $\Omega$ |

In case of cable extension, the electrical connection between the body of connectors must be ensured.

## DIMENSIONS AND RECOMMENDED FIXING

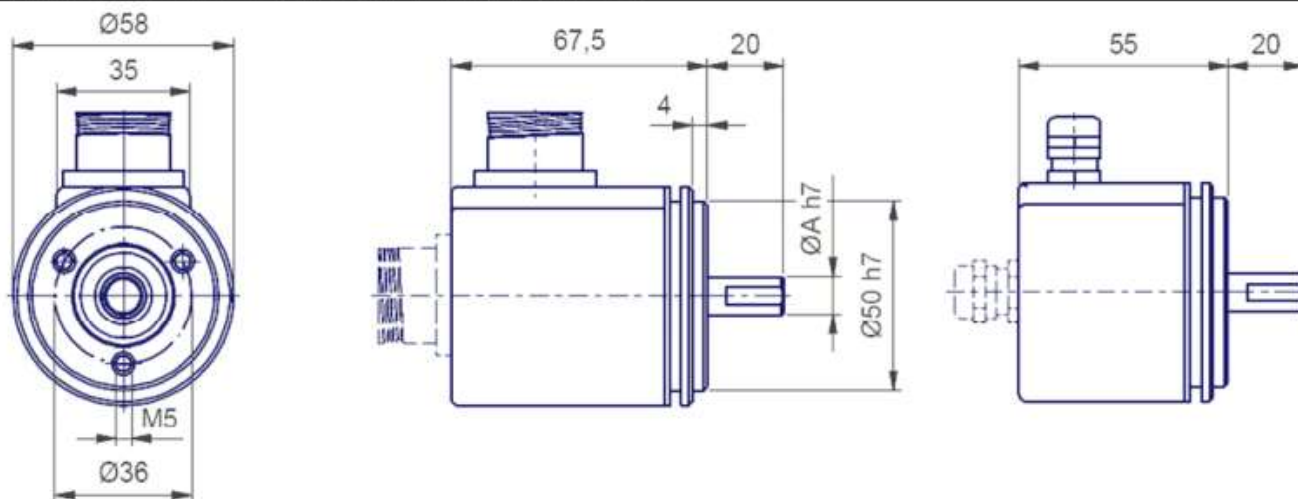

- Use an elastic coupling for shaft junction.

## WHAT TO AVOID

- Any type of mechanical working (cut, drill, mill, etc.)
- Any modification either on the body or on the shaft of the encoder
- Any kind of bad usage
- External hits or stresses

