




Strada Panealba, 2 - 10040 Volvera (TORINO) ITALY
Tel. 0039.011. 990.60.60 - (4 linee r.a.) FAX. 0039.011.985.90.73
www.logansrl.it e-mail info@logansrl.it

OPTICAL
INCREMENTAL ENCODER

EN531

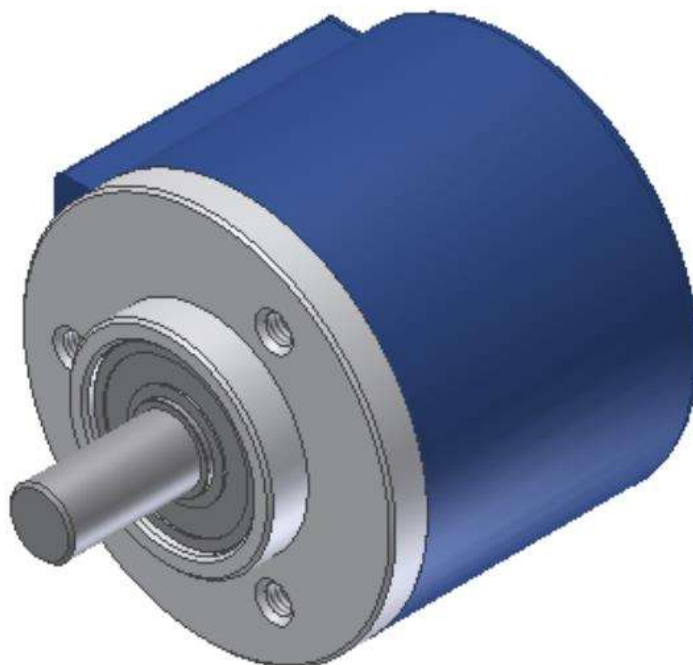


TECHNICAL DATASHEET



Strada Panealba, 2 - 10040 Volvera (TORINO) ITALY
 Tel. 0039.011. 990.60.60 - (4 linee r.a.) FAX. 0039.011.985.90.73
 www.logansrl.it e-mail info@logansrl.it

GENERAL FEATURES

- Optical rotary encoder.
- Bi-directional signals with zero pulse.
- Flange and body made of aluminium.
- Output by connector or cable (with sealing fairlead), radial or axial.

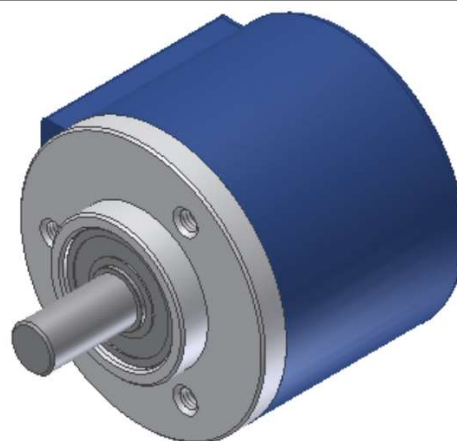

MECHANICAL AND ELECTRICAL FEATURES

MECHANICAL

- Flange and body made of aluminium.
- Shaft made of stainless steel.
- Ball bearings with special high-sealed screens.
- High protection even in harsh environmental conditions.

ELECTRICAL

- Protection against short circuits.
- Protection against inversion of polarity.
- High stability of output signals.
- Reading device with an infra-red light emitter and receiving photodiodes.
- A and B output signals with phase displacement of 90° electrical.

Code EN531	PP	LD	OC
Pulses per revolution	5 to 64000 ppr		
Max. rotating speed	momentary permanent	12000 rpm 8000 rpm	
Max. load on shaft	100 N (radial) – 100 N (axial)		
Shaft (diameter A x length L) mm	Ø6x10-ø8x20 -ø9.52x20 -ø10x20 others on request		
Protection class	IP65 (standard) * IP67 (optional)		
Operating temperature	0 ÷ 70°C		
Storage temperature	-20 ÷ 80°C		
Humidity	20 ÷ 90% (not condensed)		
Power supply	5 V ± 5% 5 ÷ 28 V ± 5%		
Max. consumption at 5 V (with no load)	25 mA		
Max. output current (each channel)	30 mA		
Max. frequency	300 kHz		
Output	Push-Pull	Line Driver	Open Collector
Standard length of cable	1 m		
Electrical connections	see the rel. table		
Electrical protection	inversion of power supply polarity and short circuits on output port		
Weight (according to model)	280 ÷ 340 g		

* It is important to note that shaft rotates more freely in the version with protection class IP65.

ORDERING CODE

MODEL	CABLE / CONN. OUTPUT	ACCURACY	PPR	POWER SUPPLY	SHAFT Ø	CABLE / CONN.	OUTPUT	CONNECTION	OPTIONS
EN531	HR	S	xxxxx	05V	D06	CE	PP	2	V2

HR = radial
 HA = axial
 No code = standard
 S = special

05V = 5V
 0528 = 5÷28V

D06 = Ø6 mm
 D08 = Ø8 mm
 9.52 = Ø9.52 mm
 D10 = Ø10 mm

M.5 = 0.5m
 M01 = 1m
 CE = 7P Amph.
 CF = 10P Amph.
 CG = 12P Connel

LD = LINE DRIVER
 PP = PUSH-PULL
 ON = OC NPN
 OP = OC PNP

C = cable
 n = no. wiring

No code = standard configuration
 V2 = protection class IP67

Example OPTICAL ENCODER EN531 HRS 01000 05V D06CE PP2 V2



Strada Panealba, 2 - 10040 Volvera (TORINO) ITALY
 Tel. 0039.011. 990.60.60 - (4 linee r.a.) FAX. 0039.011.985.90.73
 www.logansrl.it e-mail info@logansrl.it

CABLE AND ELECTRICAL CONNECTIONS

Cable 8 cores $\varnothing = 6.5$ mm, PVC external sheath

Wires section:

- for power supply: 0.5 mm^2
- for signals: 0.14 mm^2

Cable 5 cores $\varnothing = 5.4$ mm, PVC external sheath

Wires section:


- for power supply: 0.22 mm^2
- for signals: 0.14 mm^2

NOTES:

Do not exceed the minimum cable bending radius of 30 mm.

PP / OC		LD	
SIGNAL	WIRE COLOUR	SIGNAL	WIRE COLOUR
A	Green	A	Green
B	White	B	White
Z	Brown	Z	Brown
		$\bar{A}$	Orange
		$\bar{B}$	Light Blue
		$\bar{Z}$	Yellow
V+	Red	V+	Red
GND	Blue	GND	Blue
$\perp$	Shield	$\perp$	Shield

SHIELDED CABLE

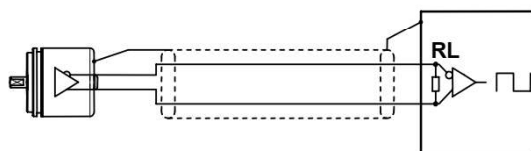


LINE DRIVER CONNECTION

POWER SUPPLY	RL
5 V	120 Ω
12 V	330 Ω
24 V	1000 Ω

In case of cable extension, the electrical connection between the body of connectors must be ensured.

DIMENSIONS AND RECOMMENDED FIXING

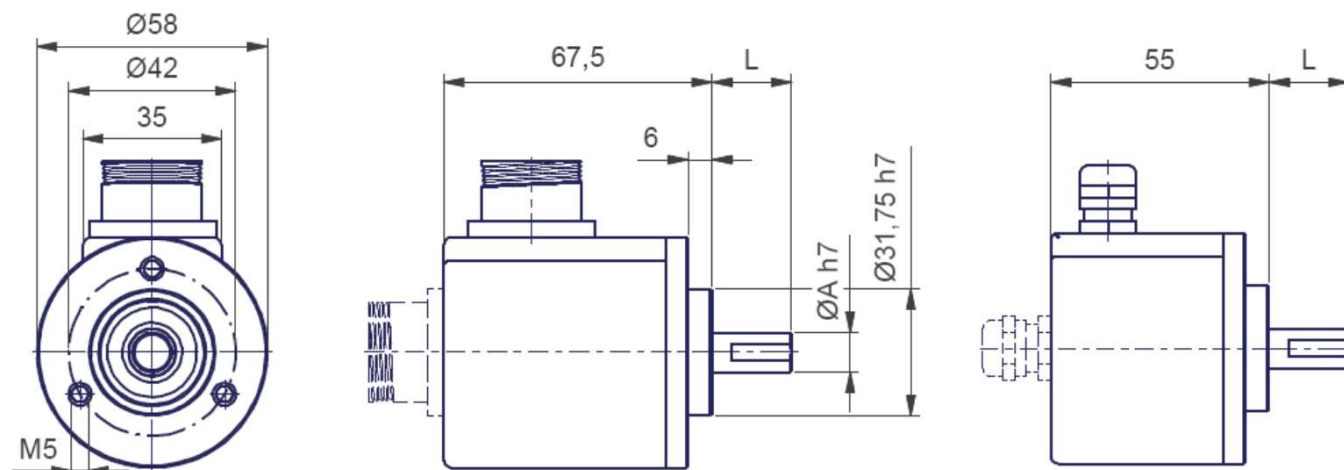

- Use an elastic coupling for shaft junction.

WHAT TO AVOID

- Any type of mechanical working (cut, drill, mill, etc.)
- Any modification either on the body or on the shaft of the encoder
- Any kind of bad usage
- External hits or stresses

