



IN SERIES
Industrial & Emergency Applications



IN1600L - IN1600LB

The IN1600L is a double sided light that produces 1600 Lumens on each side of the light head. It runs continuously for up to eighteen hours on a single charge when one side is lit, or up to ten hours on a single charge when each side is lit.



The IN1600LB is a double sided light that produces 1600 Lumens on each side of the light head. It runs continuously for up to thirty hours on a single charge when one side is lit, or up to eighteen hours on a single charge when each side is lit.

The IN Range bodies are constructed using an automotive type ABS, making the light highly durable with a solid and robust construction. The IN Range has an IP65 Rating and is manufactured with a UV and saltwater resistant ingredient allowing use in both wet and dry environments.


Using shock absorbent TPE for both the base and lid seals gives extra added protection.

Extension arms fitted to either side of the body and a push pull functional handle enable you to choose the height suitable to your needs.

Powered by a maintenance free Lead Acid Gel Battery.



	IN1600L DS	IN1600LB DS
Gross Weight (kg)	8.7	11.4
Net Weight (kg)	8.0	10.7
Open Height (mm)	Half: 900 Full: 1,150	
Closed Height (mm)	580	
Width (mm)	335	
Depth (mm)	220	
Voltage AC/DC	100-240V AC - 12-24V DC	
Battery	12V 9Ah Lead Acid Gel	12V 18Ah Lead Acid Gel
Light Type	LED	
Light Head	Double Sided	Double Sided
Lumens	1600 each side	1600 each side
Charging Time (hrs)	5-6	7-8
Battery Run Time (hrs)	Single Side: 16-17 Double Side: 8-9	Single Side: 35-36 Double Side: 16-17

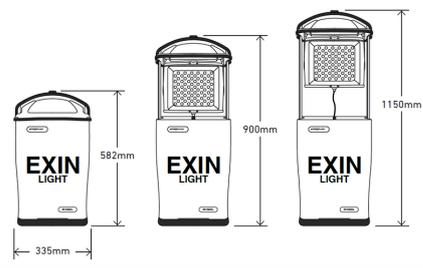

v03 25/02/2026