



CDS 33001 100 Amp Tap Changer

- Tin plated, snap action copper contacts
- Switch body, rotor, handle, and mounting nut are made from a high strength glass filled engineering thermoplastic.
- Double viton o-ring shaft seal
- Multiple indicator plate/handle kit combinations available
- Indicator plates have molded identifiers for permanent readability.





Electrical Ratings

Mounting details

Mounting hole:

Continuous amperes-series	100
Impulse level full wave-KV L-G	150
60 Hz withstand 1 minute-KV L-G	50

Maximum wall thickness is .250".

Terminal Options

Terminal Types	Part Number
0° - #10-12 (Single Deck)	70339120
0° - #10-12 (Two Deck)	70339150
0° - #10-12 (Three Deck)	70339175
90° Bolt Tab—¼" (Single Deck)	70339121
90° Bolt Tab—¼" (Three Deck)	70339176

Hardware Kits*

	Indicator Plate**		
Handle	A-B-C-D-E	1-2-3-4-5	
Lever	70339119	70339116	
Hot Stick	70339118	70339115	

*-Gasket and mounting nut included in all kits.

**-Contact factory for indicator plates with other designations.


 5500 Jefferson Parkway
 Phone: (870) 247-5320

 Pine Bluff, AR 71602
 Fax: (870) 247-5369

Note: dimensions given are in inches and are for reference only.

Mounting Hardware and Terminal Options

CDS 33001: 100 Amp Tap Changer

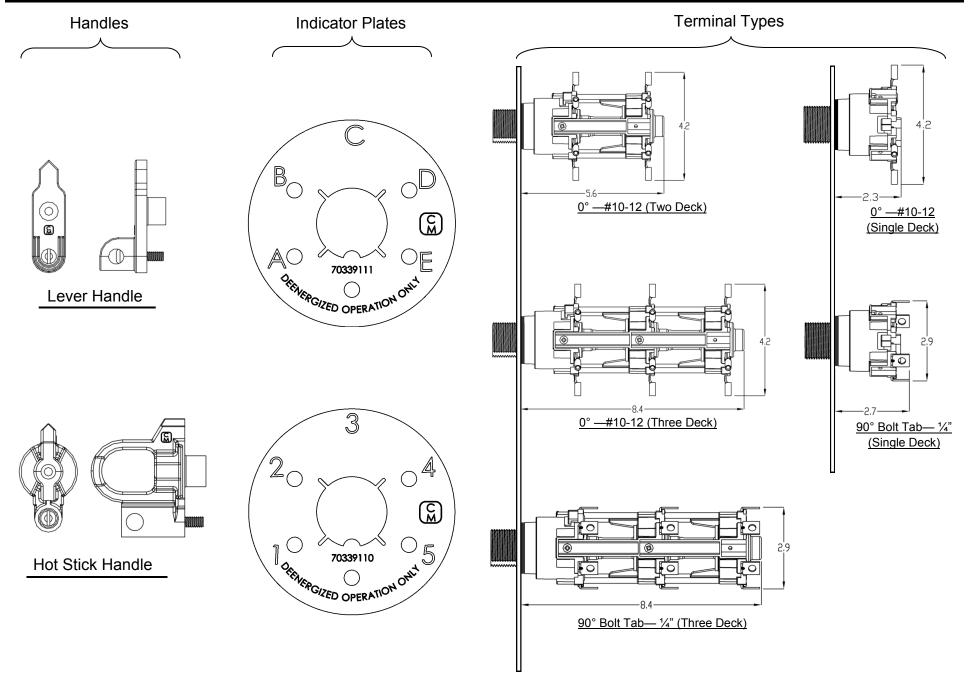

 5500 Jefferson Parkway
 Phone: (870) 247-5320

 Pine Bluff, AR 71602
 Fax: (870) 247-5369

Note: Dimensions given are in inches and are for reference only.