

GENTECH WORKSTATIONS!

The ones with the lot

Packed with a punch these workstations have everything you need. Complete with 7kVA* generator, Welder, Compressor, and Battery charger, they really have it all.

Features of the Workstation

Honda Petrol engine Petrol models have reliable electric or recoil start GX390 Honda Australia

approved engines, complete with Honda's 4 year warranty

Yanmar Diesel Engine Diesel models come with powerful and reliable Yanmar electric start engines

With less than 6% harmonic distortion to run electronic equipment and tools

160 or 200 amp at 60% duty cycl e **

Compressor 14CFM 50 L air compressor

NSM Alternator


Welder

Battery Charger 10 Amp DC Battery charger

Centre Point Lift Makes lifting by crane or forklift easy


* Diesel units are 6.8kVA

** Welder Amps depend on Petrol and diesel models see overleaf for detailed specs

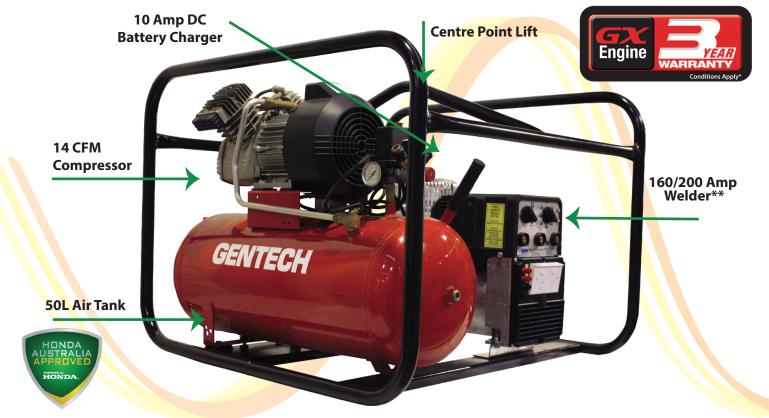











~		WS200-14-10HSR	WS200-14-10-HSRE	WS160-14-10-YSRDE
GENERATOR	Rated Voltage	230V	230V	230V
	Frequency	50Hz	50Hz	50Hz
	Rated Output	5600 Watts	5600 Watts	5440 Watts
	Max. Output	7kVA	7kVA	6.8kVA
ENGINE	Engine Type	Honda GX390	Honda GX390	Yanmar L100N5
	Horsepower	11.7HP	11HP	10HP
	Starting System	Recoil	Recoil/Electric	Recoil/Electric
GENERAL	Size - LxWxH (mm)	900x870x680	900x870x680	900x870x680
	Dry Weight	105kg	110kg	130kg
	Fuel Tank Capacity	6.1L	6.1L	5.4L
	Operating Hrs (80% Load)	2.5hr	2.5hr	3.30hr
	Fuel Consumption (80% Load)	2.44L/hr	2.44L/hr	1.65L/hr
	Noise Level (7m)	69 dbA	69 dbA	80 dbA
FEATURES	Welder Amps @ 60%	200	200	160
	Outlets	2 x 15 Amp	2 x 15 Amp	2 x 15 Amp
	Air Compressor pressure	14CFM	14CFM	14CFM
	Air Compressor Capacity	50L	50L	50L
	Centre point lift	✓	✓	✓
	Battery Charger	✓	✓	✓
	Compressor	✓	✓	✓
	Brushless Alternator	✓	✓	✓
	Auto Decompressor	✓	✓	✓

POWERED by

HONDA