



How to add devices to the DMSS app via P2P


DMSS can be found on the [Google Play store](#) and [iOS App Store](#).

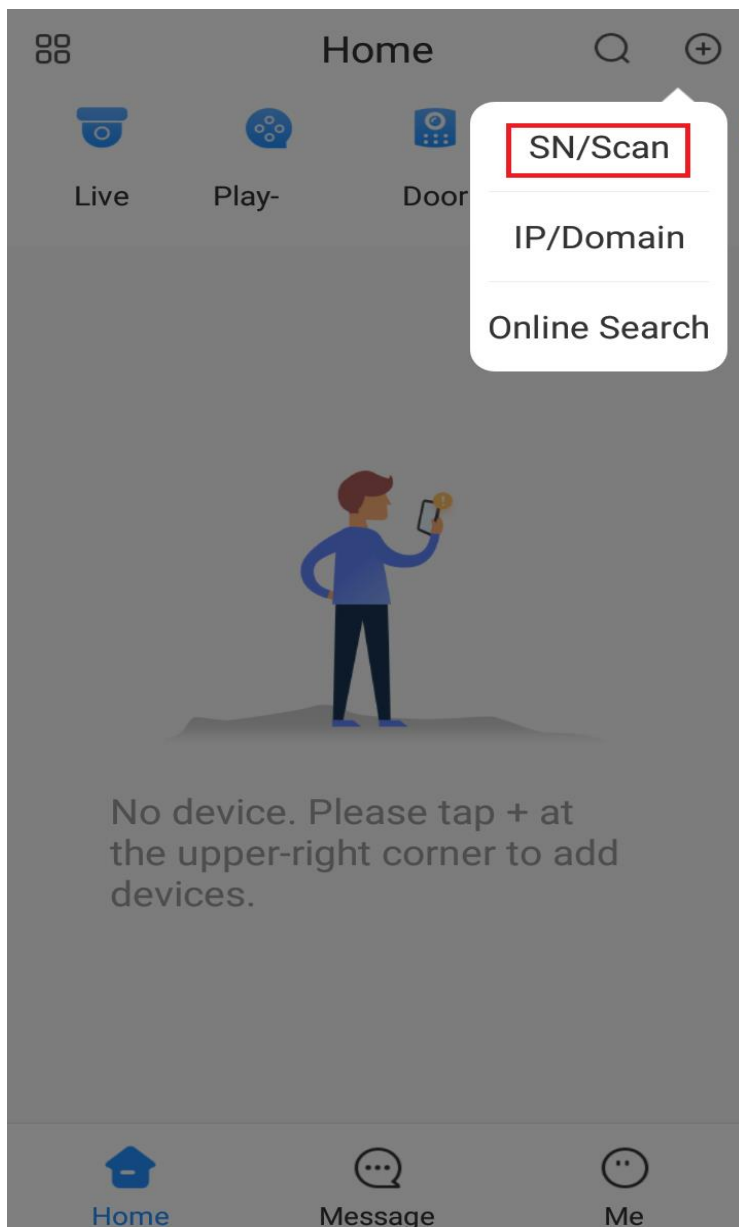

Tap on SN/Scan

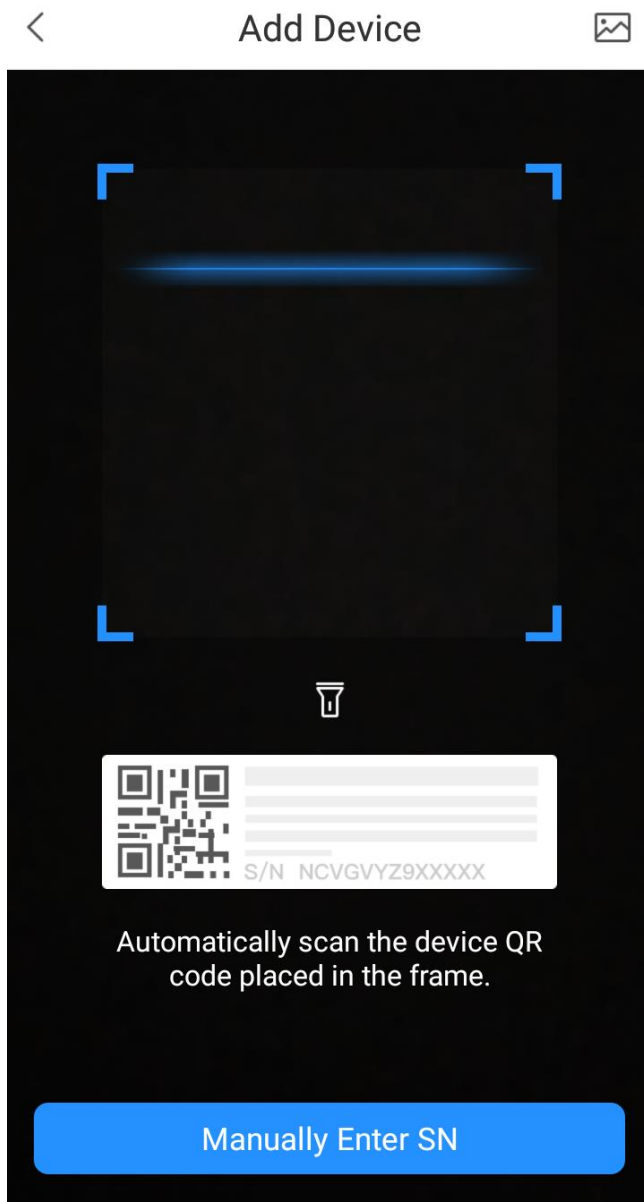






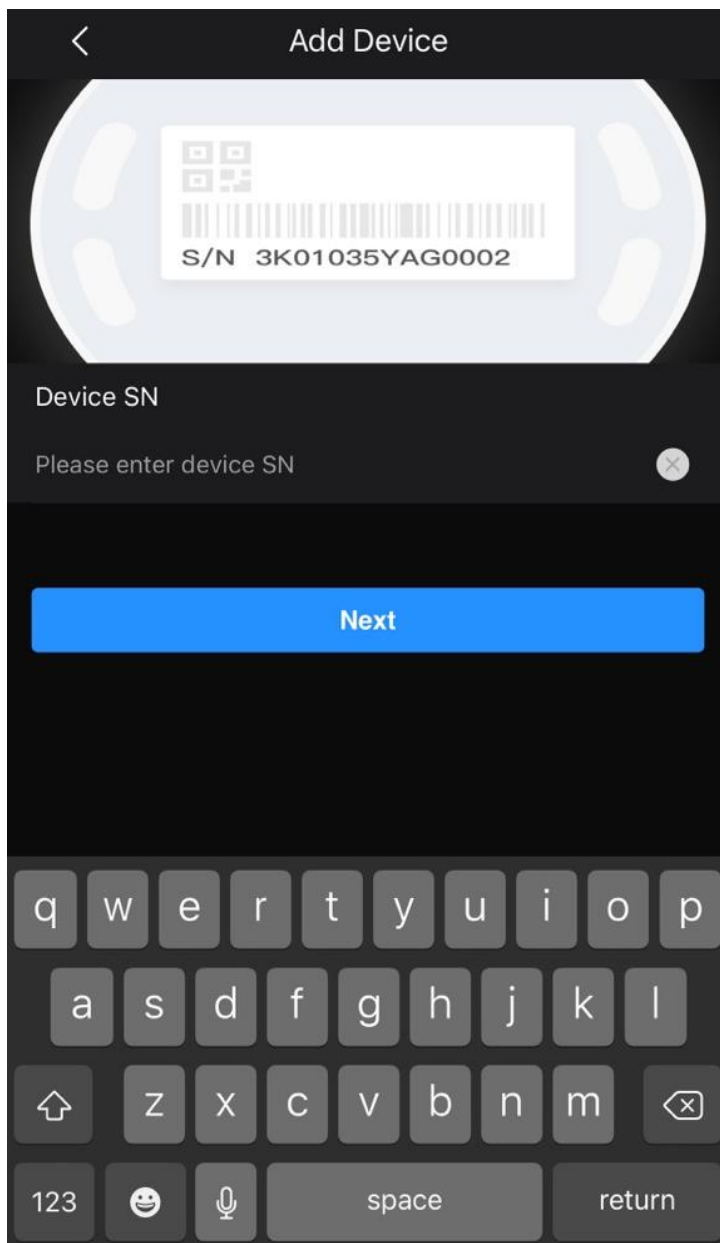





tap the "Manually Enter SN" button and enter the serial number of your device manually.



Enter SN Provided to you by
Barwon Security.



Add Device

 Wired Camera	 NVR	 DVR/XVR	 IVSS
 Wireless Camera	 VTO	 Doorbell	 Access
 Alarm Station			
Other IPC			
 L26	 C26E		

Tap on the type of device you wish to add. (e.g NVR for an NVR for a recorder

OR

VTO for a Door Station or **Wired Camera** for a standalone Camera wired to a switch or router)

<

Add Device

3 Save

Add Mode

P2P

SN

XXXXXXXXXX

1

Device Name

My Doorbell

Username

admin

2

Device Password

.....

ⓧ

🔑


Wrong username or password will result in failure to add.

[View Reasons](#)


Fill in all the columns with the details provided to you by Barwon Security.

- 1) **Name** your device
- 2) Enter the admin & device **password**
- 3) Tap **Save**


If you have an Intercom System – Follow these extra steps to turn on notifications.

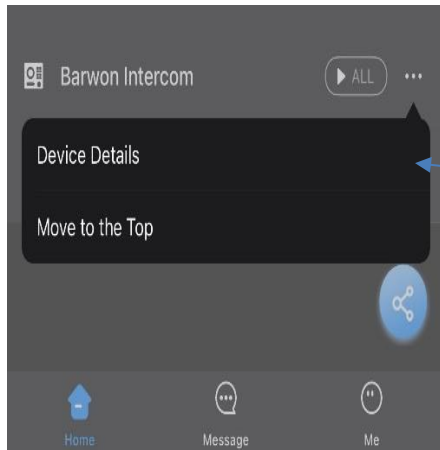

- Click the 3 dots (...)
- Press "Device Details"

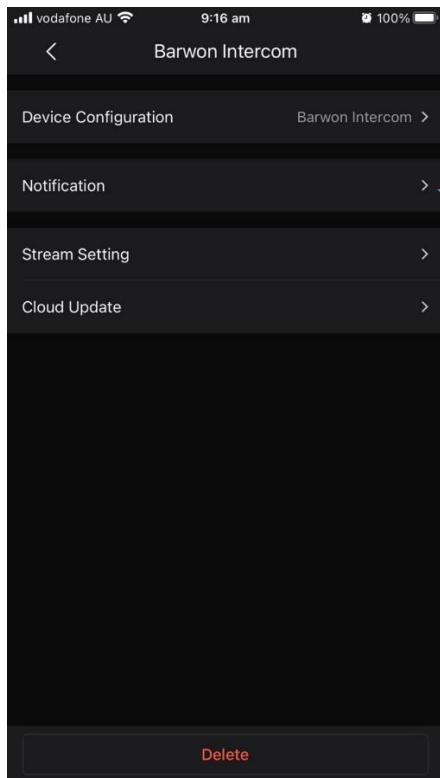

- Click Notifications

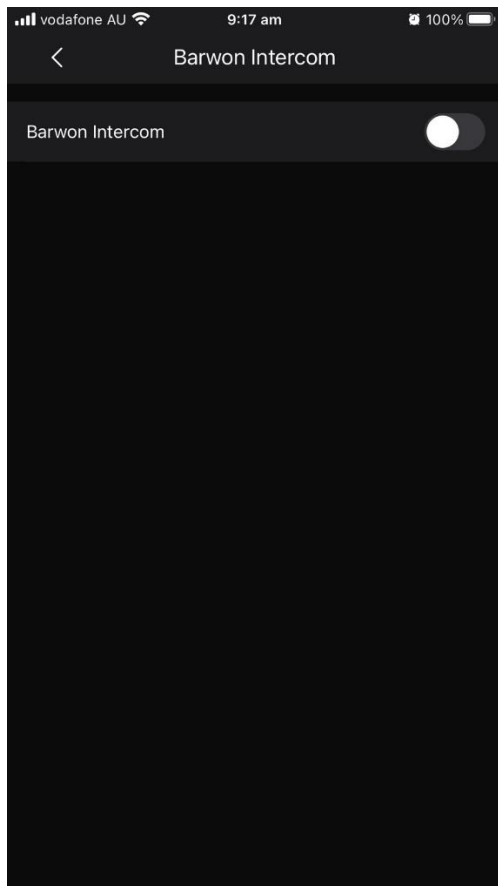

Press the notification button across – Make sure this turns blue and save.

