



















杨村桥制造基地:中国 杭州 杨村桥工业园区

三河制造基地:中国 杭州 三河工业园区

电话:0571-64133333 传真:0571-64166892 网址:www.hzaolida.com / www.hzaolida.cn


Yangcunqiao manufacturing base: yangcunqiao Industrial Park, Hangzhou, China Sanhe manufacturing base: Sanhe Industrial Park, Hangzhou, China



全国免费服务热线 400-1000-668
National Free Service Hotline

本书为一般信息类出版物,我们保留随时更改产品设计和说明的权利。本书的任何字句,无论其字面意思或含义,对于任何产品及产品的用途和质量, 或者任何购销合同条文的表述与更改均不承担任何责任。由于印刷工艺的限制,实际加工的颜色可能与本册略有不同之处,最终造型可根据实际材料和色样决定。

23.08版

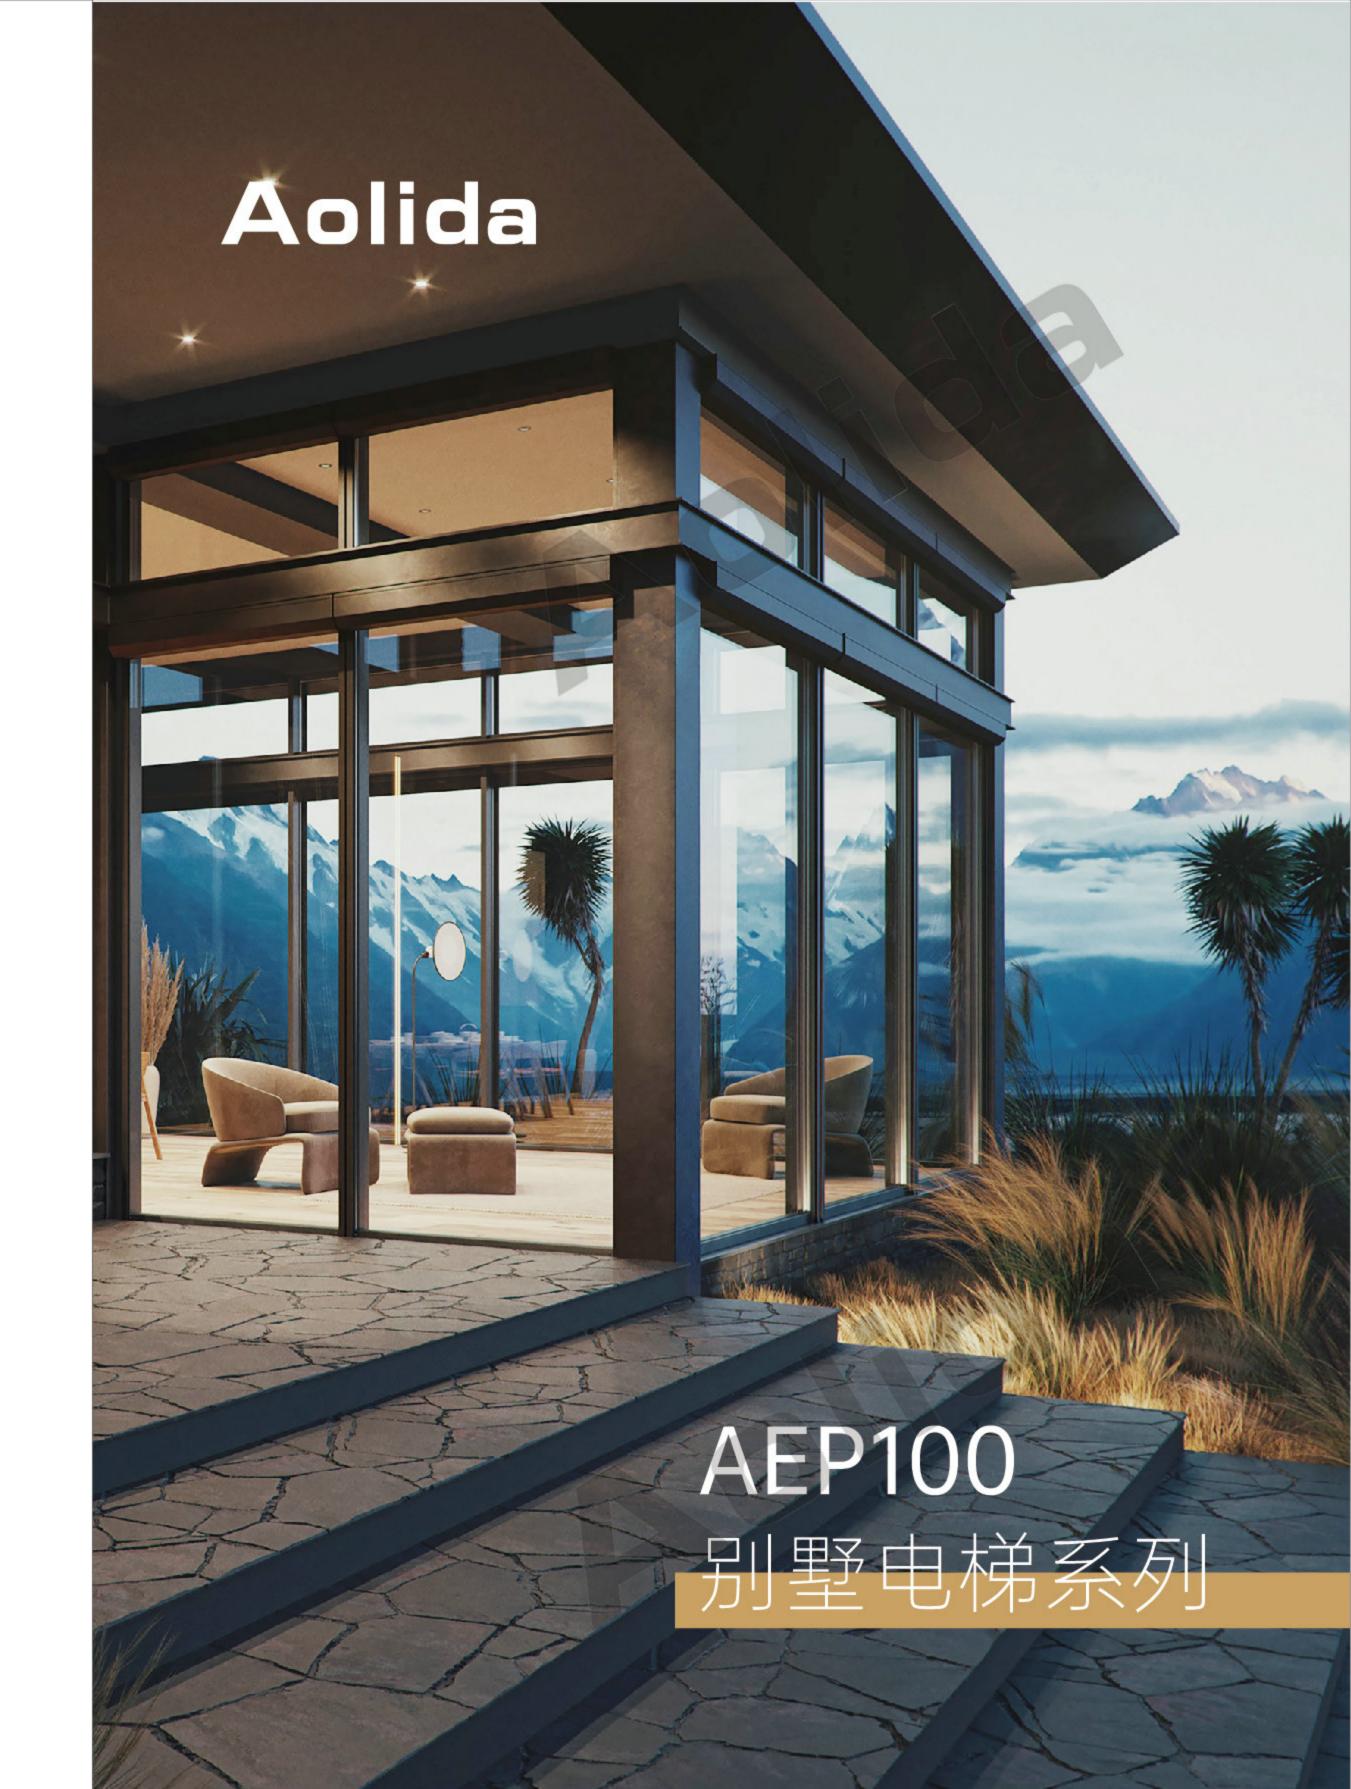



NOBLE, ELEGANT AND COMFORTABLE, SMOOTH AND STEADY

尊贵典雅 舒适平稳

奥立达AEP100系列别墅电梯, 与建筑楼宇和谐相融,同辉映,共光彩。

采用独特的钢带主机配合复合钢带, 传动效率更高, 运行更安静。

尊贵前卫的装潢风格、超强的视觉美感、 精湛的制造工艺、绿色节能的科技, 全方位关爱您和您的家人。


产品规格: 250-400kg, 0.4m/s, 适用于别墅、私人住宅等场所。

Aolida AEP100 series villa elevator, Integrates into buildings harmoniously, implementing glory to the architecture.

Using unique steel strip with a composite steel strip, More efficient transmission, quieter operation.

Noble avant-garde decoration style,
Super visual beauty, superb manufacturing process,
green energy-saving technology,
Take care of you and your family on every side.

Product specifications: 250-400kg, 0.4m/s, Applicable to villas, private house and other places.

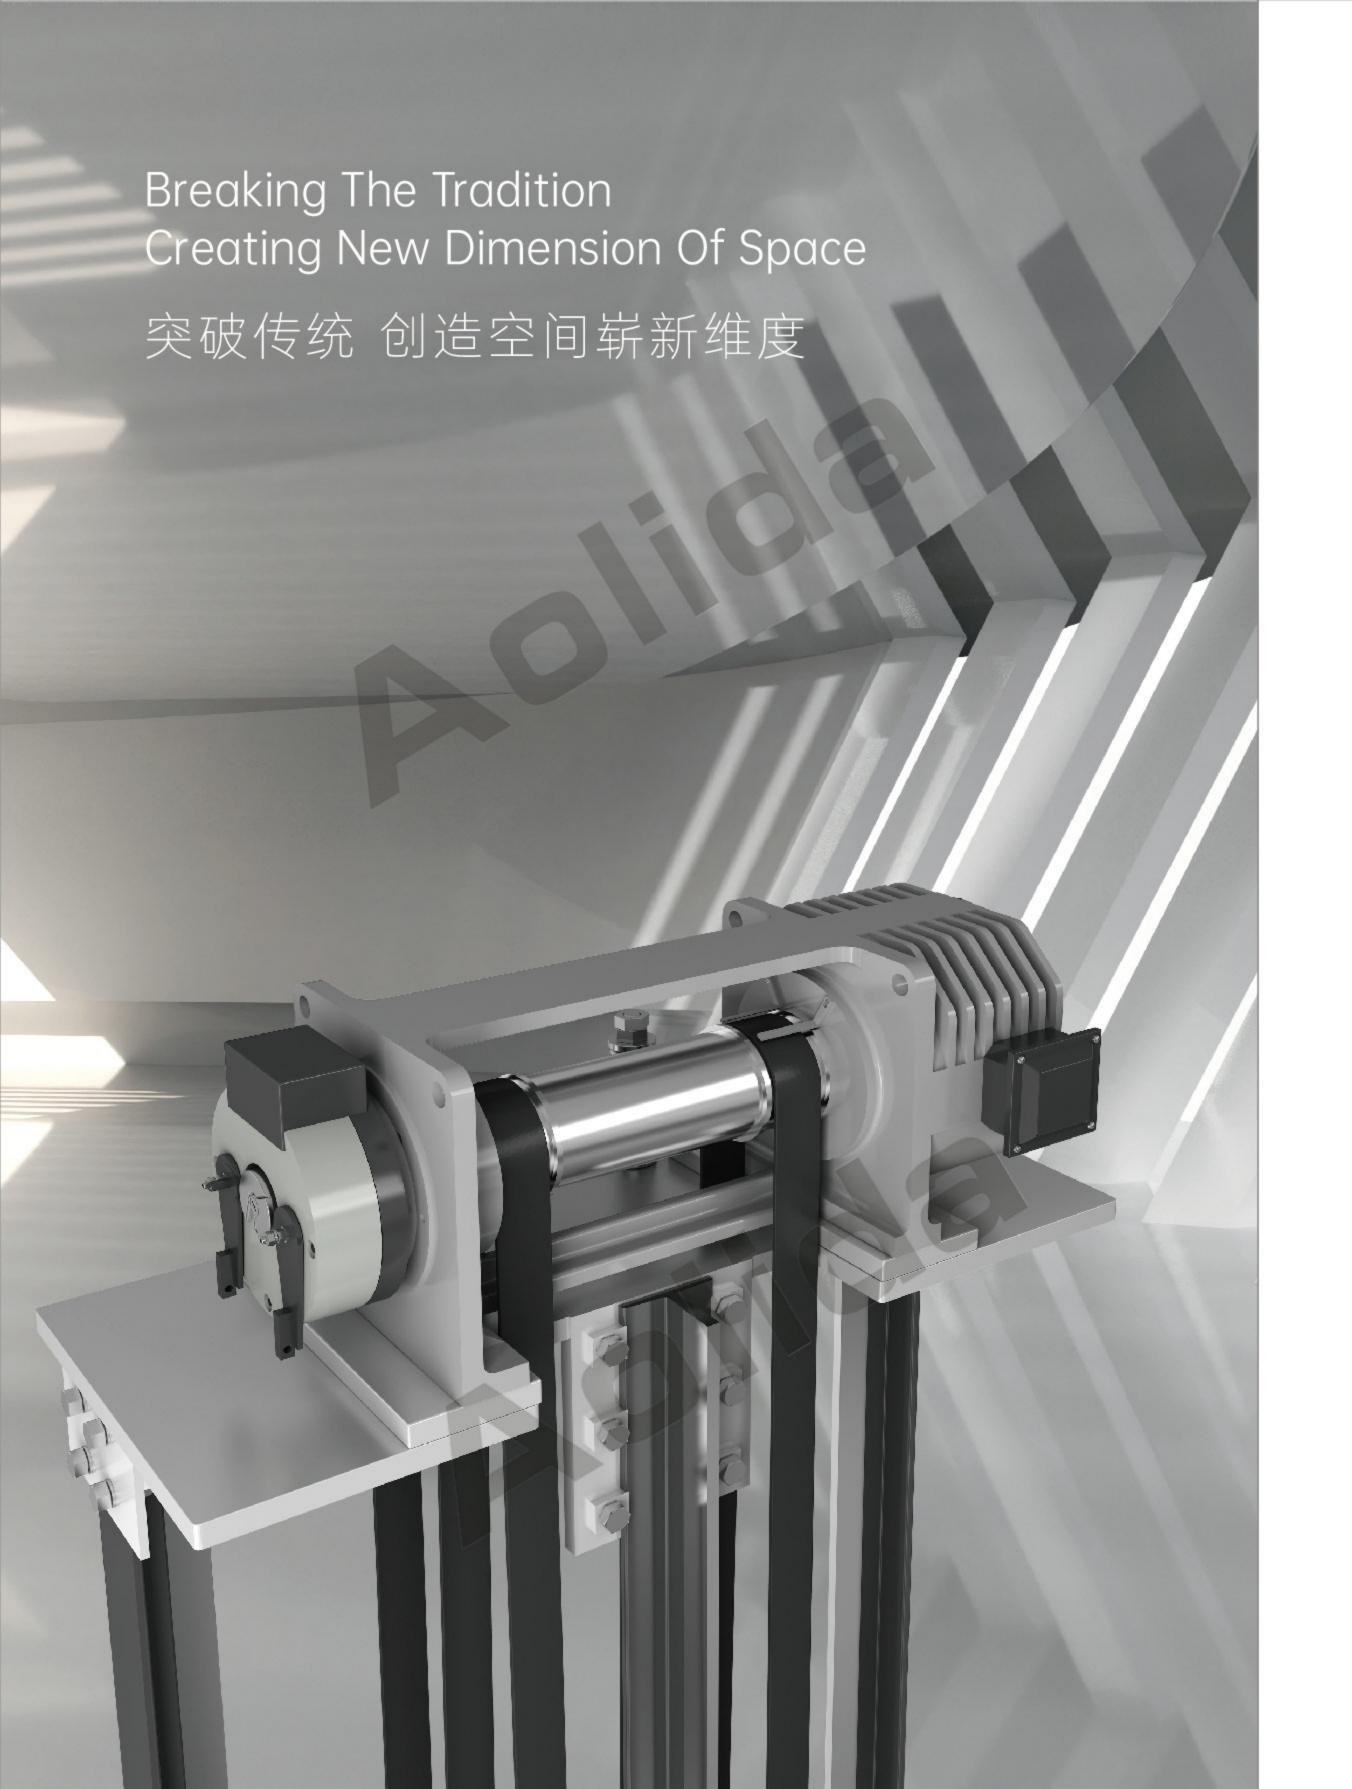

钢带主机,与传统曳引机相比:

◎ 更小巧:驱动轮轴和电机轴一体化设计,力学结构 合理,空间布局美观;

◎ 更紧凑:反绳轮、对重轮及主机布置使井道投影面积更小;

◎ 更高效:相比传统电机高35%。

Compared with the traditional traction machine, the main steel belt machine:

- More compact: drive wheel shaft and motor shaft integrated design, reasonable mechanical structure, beautiful space layout;
- More compact: the arrangement of the reverse rope wheel and the main engine makes the well projection area smaller;
- More efficient: 35% higher than traditional motors

复合扁平钢带,与传统钢丝绳相比:

- ◎ 高耐磨: 刚柔相济,寿命更长,运行更平稳;
- 更静音: 高分子复合弹性体有效降低传动系统振动, 营造静谧生活;
- ◎ 更环保: 无需矿物油润滑, 清洁干净。

Composite steel strip, compared with traditional steel wire rope:

- High wear resistance: combination of rigidity and softness, longer service life and more stable operation;
- More quiet: Polymer composite elastomer can effectively reduce the vibration of transmission system and create a quiet life;
- More environmentally friendly: No mineral oil lubrication, clean.

奥立达专用的断带监测装置,实时检测复合钢带的金属疲劳或股损坏,在维保人员和用户未察觉的情况下,提前预警,确保及时更换。

Aolida belt-breaking monitoring device realizes real-time detection of the metal fatigue or damage of composite steel sheet, and makes early warning in advance before the maintenance personnel and users are aware of the condition, to ensure timely replacement.






复合扁平钢带

井道空间要求进一步降低,布置更紧凑

The hoistway space requires to be lowered further and the layout is more compact


传统别墅电梯底坑500mm, 奥立达钢带电梯底坑仅需160mm, 有效节约空间68%。

Traditional villa elevator pit is 500mm, but Aolida steel strip elevator pit is only 160mm, which saves 68% of space.

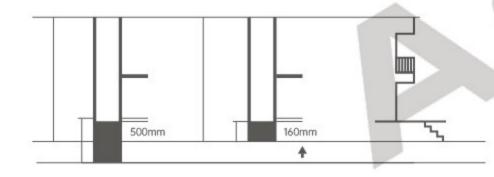

传统别墅电梯顶层3300mm, 奥立达钢带电梯顶层 仅需2900mm, 有效节约空间13%。

Traditional villa elevator top is 3300mm, but Aolida steel strip elevator top is only 2900mm, which saves 13% of space.

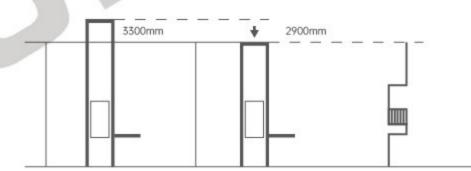

Guarding Your Home Wholeheartedly To Bring You Safety And Warmth

全心全意 守护家园安全温暖



自动报警

automatic alarm

故障自动报警,可将故障信息发送给维保人员。

Auto-malfunction alarm, sending the fault information to the maintenance personnel.



一键呼救(标配)

One click for help (standard)

一键呼救, 轿内利用物联网模块可实现远程与维保救援人员、值班室人员紧急通讯、应急救援。

One-click call for help (standard), the car is realized by using the Internet of Things module, which can remotely communicate with maintenance and rescue personnel and duty room personnel for emergency rescue.



安全环保

Safety and environmental protection

多重防护、安全同行,按家装的高要求进行选材,轿厢采用不锈钢、大理石等材料,兼顾美观与环保。

Multiple protection safe peers, according to the high requirements of home improvement, the car is made of stainless steel, rock slab and other materials, giving attention to beauty and environmental protection.



停电应急救援(标配)

Emergency rescue of power failure (standard)

停电或突发故障时, 电梯将运行至最近楼层平层开门, 确保乘客安全。

In case of power failure or sudden failure, the elevator will run until the nearest floor opens at the same level to ensure the safety of passengers.



产品责任险

Product liability insurance

PICC安全保障, 奥立达电梯投保中国人民财产保险产品责任险, 全方位呵护您的人身、财产安全。

PICC security, Aolida elevator is covered by Liability insurance for products under the people's property insurance of China. Take full care of your personal safety and property security.





Green Technology Energy Conservation Technology Pioneer

绿色科技 化身科技节能先锋



永磁同步无齿轮钢带曳引机

Permanent magnet gearless steel belt traction machine

独特的永磁同步无齿轮钢带曳引机,免维护,无污染, 1.0KW超低能耗,宛若冰箱等电器,有效节能35%以上;

Unique permanent magnet synchronous gearless steel strip traction machine, maintenance-free, pollution-free, 1.0KW ultra-low energy consumption, just like the refrigerator and other electrical appliances, which saves more than 35% of energy;



永磁同步变频门机

Permanent magnet synchronous frequency conversion portal crane

永磁同步变频门机,低功率: 0.05KW,大转矩: 2.7N·m,速度、位置、力矩全闭环控制,无需位置 反馈开关,节能的同时降低故障率;

Permanent magnet synchronous frequency conversion machine is of a low power of 0.05KW and high torque of 2.7N·m. It enables the full closed loop control of speed, position and torque, in which case the position feedback switch is not necessary. It is not only energy-efficient but is able to reduce failure rate;



LED照明系统

LED lighting system

全LED自动照明系统,有效降低能耗;标配家用单相 AC220V电源(可选配三相AC380V);

Full LED automatic lighting system, effectively reducing energy consumption; 220V home power supply, for easy installation(Optional three-phase AC380V);



自动照明技术

Automatic lighting technology

新厢自动照明技术,无人使用时照明灯处于熄灭状态,有人使用,自动打开,低功耗运行,真正实现绿色环保节能新指标。

Automatic lift car ligting technology, which is off during non-working state, and is on automatically when people use. Low power operation, realizing new index of environmental protection and energy saving.





高效运行

Efficient operation

智能化矢量控制, 轻松实现电梯直接靠站, 提高运行效率;

Intelligent vector control, realizing direct stop more easily, and improving the operational efficiency;



安装便捷

Easy installation

全串行通讯系统,减少系统接线,方便安装及布线;

Full serial communication system reduces system wiring, for easy installation and wiring;



最佳运行曲线

Optimal operation curve

系统根据楼层高度自动计算出适合人体舒适的运行曲 线,同时提供丰富的控制功能;

The system calculates the operation curve suitable for the human body automatically according to the height of the floor, Providing abundant control functions;



精准开关门

Accurate opening and closing door

永磁同步变频门机系统,实际运行与控制器开关门的速度曲线完全一致,平稳准确开门。

Permanent magnet synchronous frequency conversion door-motor system, velocity diagram of actual operation and the controller switching door completely consistent, opening the door smoothly and accurately.

Gorgeous Turn New Horizon

华丽转身 焕新视界浑然天成



一体式控制柜(标配)

Integrated glory control cabinet (standard)

标配一体式控制柜,超薄设计,更小巧,便于隐藏安装,让建筑与电梯更和谐、精致。

Standard integrated glory control cabinet, ultra-thin design, smaller, easy to hide and install, making the building and elevator more harmonious and refined.

图示厅门为:

铝合金门框+透明玻璃

The diagram of landing door: Aluminum alloy door frame + clear glass

注: 图示仅供参考



Colorful Hoistway Decoration Scheme

多彩井道装饰方案

铝材一体成型制作;

The aluminum material is integrally formed;

烤漆工艺, 经久耐用不变色, 美观大方;

Paint process, durable, color-free, beautiful and generous;

颜色可选,满足不同装修风格,能与室内融为一体;

Optional colors to meet different decoration styles, which can be integrated with the interior;

不破坏建筑原有结构;

Do not destroy the original structure of the building;

厚重及连接强度高,仅需相邻两侧固定,可以自由选择现场放置;

Thick and high connection strength, only two adjacent sides need to be fixed, and can be freely placed on site;

积木式安装, 可配套安装家用梯各类结构;

Modular installation, which can be used to install various structures of domestic ladders;

玻璃内嵌式,不占井道空间,可单独拆卸;

Built-in glass, which does not occupy the space of shaft and can be disassembled independently;

可一体配套手拉门、自动门、双开自动门。

Hand sliding door, automatic door and double-opening automatic door can be integrated.

注: 现场框架结构需根据客户土建量身定制。

Note: the site frame structure shall be customized according to the customer's civil engineering.



ALFA20-009

银色 Silver

标配 Standard



ALFA20-008

浅香槟 Shallow champagne



氟碳浅香槟 Fluorocarbon shallow champagne



木纹 Grain

私人定制 徜徉自由空间





标配 Standard

一体顶: 镜面不锈钢+亚克力+平面光源 (DD16006)

侧 壁: 发纹不锈钢

轿门: 发纹不锈钢

操纵箱: 一体式操纵箱, 发纹不锈钢 (OK21005)

地 板: 通体大理石瓷砖 (DB23001)

层 门: 发纹不锈钢

Integrated ceiling: Mirror stainless steel + acrylic

+ plane light source (DD16006)

Back wall: Hairline stainless steel + mirror stainless steel

Side wall: Hairline stainless steel Front wall: Hairline stainless steel Car door: Hairline stainless steel Operation panel: Integrated control box,

hairline stainless steel (OK21005) Flooring: Full body marble tile (DB23001) Layer door: Hairline stainless steel









一体顶: 发纹不锈钢边框+亚克力+平面光源 (DD19016)

轿门: 发纹不锈钢

操纵箱: 一体式操纵箱, 发纹不锈钢 (OK21005)

地 板: 通体大理石瓷砖 (DB23001)

层 门: 发纹不锈钢

Integrated ceiling: Hairline stainless steel frame + acrylic

+ plane light source (DD19016)

Back wall: Hairline stainless steel + mirror stainless steel

Side wall: Hairline stainless steel Front wall: Hairline stainless steel Car door: Hairline stainless steel

Operation panel: Integrated control box, hairline stainless steel (OK21005)

Flooring: Full body marble tile (DB23001) Layer door: Hairline stainless steel



扫描二维码 观看电梯 360°全景



私人定制 徜徉自由空间



KC23003 有偿选配 Compensated optional

一体顶: 烤漆钢板+灯带 (DD23001)

后 壁: 发纹不锈钢+镜面不锈钢

侧 壁: 发纹不锈钢

前 壁: 发纹不锈钢

轿门: 发纹不锈钢

操纵箱:一体式操纵箱,发纹不锈钢(OK21005)

地 板: 通体大理石瓷砖 (DB23001)

层门: 发纹不锈钢

Integrated ceiling: Painted steel plate + lamp belt (DD23001)

Back wall: Hairline stainless steel + mirror stainless steel

Side wall: Hairline stainless steel Front wall: Hairline stainless steel

Car door: Hairline stainless steel

Operation panel: Integrated control box,

hairline stainless steel (OK21005)

Flooring: Full body marble tile (DB23001)

Layer door: Hairline stainless steel





扫描二维码 观看电梯 360°全景



一体顶:铝合金黑色边框+亚克力+平面光源 (DD23002)

后 壁: 发纹不锈钢+安全夹胶玻璃

侧 壁: 发纹不锈钢+安全夹胶玻璃

前 壁: 发纹不锈钢

扶 手: 发纹不锈钢

轿 门: 发纹不锈钢有框玻璃门

操纵箱: 多媒体触摸操纵箱 (OK21002)

外 呼: 壁挂式外呼 (CK21002)

地 板: 大理石拼花 (DB23002)

层 门: 发纹不锈钢有框玻璃门

Integrated ceiling: Aluminum alloy black frame

+ acrylic + plane light source (DD23002)

Back wall: Hairline stainless steel + safety laminated glass

Side wall: Hairline stainless steel + safety laminated glass Front wall: Hairline stainless steel

Handrail: Hairline stainless steel

Car door: Hairline stainless steel framed glass door

Operation panel: Multimedia touch control box (OK21002)


Outgoing call: Wall Mounted Outgoing Call (CK21002)

Flooring: Marble mosaic (DB23002)

Layer door: Hairline stainless steel framed glass door









私人定制 徜徉自由空间。



KC23032 有偿选配 Compensated optional

吊 顶: 镜面不锈钢边框+亚克力+平面光源 (DD20002)

氟碳浅香槟铝合金框架+安全夹胶玻璃

氟碳浅香槟铝合金框架+安全夹胶玻璃

前 壁: 氟碳浅香槟铝合金

轿门: 氟碳浅香槟铝合金框架+安全夹胶玻璃

操纵箱: 多媒体触摸操纵箱 (OK21002)

外 呼: 壁挂式外呼 (CK21002)

地 板: 通体大理石瓷砖 (DB23005)

层 门: 氟碳浅香槟铝合金框架+安全夹胶玻璃

Ceiling: Mirror stainless steel frame + Acrylic +

plane light source (DD20002)

Back wall: Fluorocarbon light Champagne aluminum alloy frame + safety laminated glass

Side wall: Fluorocarbon light Champagne

aluminum alloy frame + safety laminated glass

Front wall: Fluorocarbon light Champagne aluminum alloy

Car door: Fluorocarbon light Champagne aluminum alloy

frame + safety laminated glass

Operation panel: Multimedia touch control box (OK21002)

Outgoing call: Wall Mounted Outgoing Call (CK21002) Flooring: All-body Marble Tile (DB23005)

Layer door: Fluorocarbon light Champagne aluminum alloy

frame + safety laminated glass



观看电梯 360°全景



一体顶: 钛金发纹不锈钢边框+钛金镜面不锈钢+LED灯+

暗藏灯带 (DD23004)

后 壁: 钛金发纹不锈钢+安全夹胶玻璃

侧 壁: 钛金发纹不锈钢+安全夹胶玻璃

前 壁: 钛金发纹不锈钢

扶 手: 钛金发纹不锈钢

轿 门: 钛金发纹不锈钢有框玻璃门

操纵箱: 多媒体触摸操纵箱 (OK21002)

外 呼: 壁挂式外呼 (CK21002) 地 板: 大理石 (DB23004)

层 门: 钛金发纹不锈钢有框玻璃门

Integrated ceiling: Titanium hairline stainless steel border + titanium mirror stainless steel + LED light + hidden light strip (DD23004)

Back wall: Titanium hairline stainless steel + safety laminated glass

Side wall: Titanium hairline stainless steel

+ safety laminated glass

Front wall: Titanium hairline stainless steel

Handrail: Titanium hairline stainless steel

Car door: Titanium hairline stainless steel framed glass door Operation panel: Multimedia touch control box (OK21002)


Outgoing call: Wall Mounted Outgoing Call (CK21002)

Flooring: Marble (DB23004)

Layer door: Titanium hairline stainless steel framed glass door



观看电梯 360°全景







KC16036A 有偿选配 Compensated optional

吊 顶: 镜面不锈钢+亚克力+镜面不锈钢装饰条+平面光源 (DD16021)

轿 壁: 钛金发纹不锈钢+镜面不锈钢

前 壁: 镜面不锈钢 轿门: 镜面不锈钢

操纵箱: 一体式操纵箱, 镜面不锈钢 (OK21005)

地 板: PVC地板 (DB16010)

层 门: 镜面不锈钢

Ceiling: Mirror stainless steel + acrylic + mirror stainless steel trim strip + plane light source (DD16021)

Car wall: Titanium hairline stainless steel + mirror stainless steel

Front wall: Mirror stainless steel

Car door: Mirror stainless steel

Operation panel: integrated control box, mirror stainless steel (OK21005)

Flooring: PVC flooring (DB16010) Layer door: Mirror stainless steel





扫描二维码 观看电梯 360°全景

▶ KC23031 有偿选配 Compensated optional

吊 顶: 镜面不锈钢+LED灯 (DD17007)

轿 壁: 镜面不锈钢+木纹积层板(山毛榉)

前 壁: 镜面不锈钢

轿门: 镜面不锈钢

操纵箱: 一体式操纵箱, 镜面不锈钢 (OK21005)

地 板: 通体大理石瓷砖 (DB23001)

层 门: 镜面不锈钢

Ceiling: Mirror stainless steel + LED light (DD17007)

Car wall: Mirror stainless steel + wood grain laminated board (beech)

Front wall: Mirror stainless steel + wood finishes

Car door: Mirror stainless steel

Operation panel: Integrated control box, mirror stainless steel (OK21005)

Flooring: Full body marble tile (DB23001)

Layer door: Mirror stainless steel

轿厢推荐尺寸: 1200≤CW≤1600 1000≤CD≤1600 Recommended car size: 1200≤CW≤1600 1000≤CD≤1600





扫描二维码 观看电梯 360°全景



私人定制 徜徉自由空间



▼ ZH19047A 有偿选配 Compensated optional

吊 顶:上、下层古铜镜面不锈钢边框+钻石生态树脂板+

平面光源 (DD19038)

侧 壁:中间古铜镜面不锈钢+古铜镜面不锈钢嵌条,

两侧青铜长发纹不锈钢

后 壁: 中间白色玉砂玻璃+古铜镜面不锈钢嵌条,

两侧青铜长发纹不锈钢

前 壁: 青铜长发纹不锈钢

轿门:青铜长发纹不锈钢

扶 手: 后壁, 青铜长发纹不锈钢造型

一体式操纵箱,青铜长发纹不锈钢 (OK21005)

地 板: 大理石拼花 (DB19033)

层 门: 青铜长发纹不锈钢

Ceiling: Upper and lower bronze mirror stainless steel border+ diamond ecological resin board+plane light source (DD19038) Side wall: Middle bronze mirror stainless steel, bronze mirror stainless steel molding, bronze long hairline stainless steel on both sides Back wall: Middle white jade glass, bronze mirror stainless steel molding, bronze long hairline stainless steel on both sides Front wall: Bronze long hairline stainless steel Car door: Bronze long hairline stainless steel Handrail: Back wall, bronze long hairline stainless steel shape Operation panel: Integrated control box, bronze long hairline stainless steel (OK21005)

Flooring: Marble mosaic (DB19033) Layer door: Bronze long hairline stainless steel



观看电梯 360°全景



) KC21012

有偿选配 Compensated optional

吊 顶: 香槟金长发纹不锈钢, LED灯 (DD21009)

后 壁: 香槟金镜面不锈钢, 香槟金镜面蚀刻不锈钢

一体式操纵箱, 香槟金长发纹不锈钢 (OK21005)

地 板: 大理石拼花 (DB21010)

层 门: 香槟金长发纹不锈钢

Ceiling: Champagne gold long hairline stainless steel + LED light (DD21009)

Front wall: Champagne gold long hairline stainless steel Side wall: Champagne gold long hairline stainless steel

Rear wall: Champagne gold mirror stainless steel + champagne gold mirror etched stainless steel

Car door: Champagne gold long hairline stainless steel Operation panel: handrail control box, Champagne gold

long hairline stainless steel (OK21005) Flooring: Marble mosaic (DB21010)


Layer door: Champagne gold long hairline stainless steel



观看电梯 360°全景



私人定制 徜徉自由空间

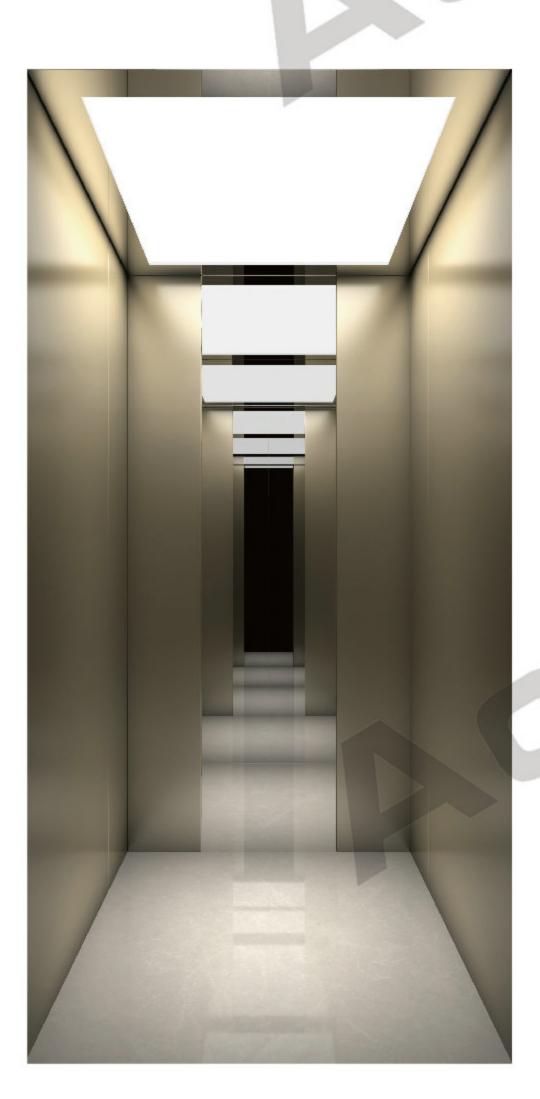

KC23009 有偿选配 Compensated optional

吊 顶: 镜面不锈钢+亚克力+平面光源 (DD23009)

后 壁: 抗指纹香槟金喷砂不锈钢+镜面不锈钢

侧 壁: 抗指纹香槟金喷砂不锈钢

前 壁: 镜面不锈钢

轿门: 镜面不锈钢

操纵箱: 一体式操纵箱, 镜面不锈钢 (OK21005)

地 板: 通体大理石瓷砖 (DB23005)

层 门: 抗指纹香槟金喷砂不锈钢

Ceiling: Mirror stainless steel + acrylic

+ plane light source (DD23009)

Back wall: Anti-fingerprint champagne gold sandblasted stainless steel + mirror stainless steel

Side wall: Anti-fingerprint champagne gold

Front wall: Mirror stainless steel

Car door: Mirror stainless steel

Operation panel: All-in-one control box,

mirror stainless steel (OK21005)

Flooring: Full body marble tile (DB23005)

Layer door: Anti-fingerprint champagne gold sandblasted stainless steel





扫描二维码 观看电梯 360°全景



吊 顶: 发纹不锈钢+亚克力+平面光源(DD23010)

后 壁: 古铜发纹不锈钢+黑钛蚀刻镜面不锈钢

侧 壁: 古铜发纹不锈钢+黑钛镜面不锈钢

前 壁: 古铜发纹不锈钢

轿门: 古铜发纹不锈钢 操纵箱:一体式操纵箱, 古铜发纹不锈钢(OK21005)

地 板: 大理石拼花 (DB23006)

层 门: 古铜发纹不锈钢

Ceiling: Hairlines stainless steel + acrylic +

plane light source(DD23010)

Back wall: Bronze hairline stainless steel

+ black titanium etched mirror stainless steel

Side wall: Bronze hairline stainless steel

+ black titanium mirror stainless steel Front wall: Bronze hairline stainless steel

Car door: Bronze hairline stainless steel

Operation panel: All-in-one control box,

bronze hairline stainless steel (OK21005)

Flooring: Marble mosaic (DB23006)

Layer door: Bronze hairline stainless steel

轿厢推荐尺寸: 1000≤CW≤1600 1000≤CD≤1600 Recommended car size: 1000≤CW≤1600 1000≤CD≤1600



扫描二维码 观看电梯 360°全景





私人定制 徜徉自由空间





一体顶:钢板喷塑+亚克力+LED灯(DD23011)

后 壁: 黑钛发纹不锈钢+黑钛蚀刻镜面不锈钢 侧 壁: 黑钛发纹不锈钢+黑钛镜面不锈钢

前 壁: 黑钛发纹不锈钢 轿门:黑钛发纹不锈钢

操纵箱: 一体式操纵箱, 黑钛发纹不锈钢(OK21005)

地 板: 大理石拼花 (DB23007)

层 门: 黑钛发纹不锈钢

Integrated ceiling: Steel plate spray + acrylic + LED light(DD23011)

Back wall: Black titanium hairline stainless steel + black titanium etched mirror stainless steel Side wall: Black titanium hairline stainless steel + black titanium mirror stainless steel Front wall: Black titanium hairline stainless steel Car door: Black titanium hairline stainless steel Operation panel: All-in-one control box black titanium hairline stainless steel (OK21005) Flooring: Marble mosaic (DB23007)

layer door: Black titanium hairline stainless steel

轿厢推荐尺寸: 1200≤CW≤1600 1000≤CD≤1600 Recommended car size: 1200≤CW≤1600 1000≤CD≤1600





观看电梯 360°全景



有偿选配 Compensated optional

吊 顶:铝合金黑色边框+亚克力+平面光源 (DD23002)

后 壁: 古铜发纹不锈钢+古铜镜面不锈钢+灯带

侧 壁: 古铜发纹不锈钢 前 壁: 古铜发纹不锈钢

轿门: 古铜发纹不锈钢

操纵箱:一体式操纵箱, 古铜发纹不锈钢(OK21005)

地 板: 通体大理石瓷砖 (DB23005)

层 门: 古铜发纹不锈钢

Ceiling: Aluminum alloy black frame + acrylic +

plane light source(DD23002)

Back wall: Bronze hairline stainless steel + bronze mirror stainless steel + lamp strip

Side wall: Bronze hairline stainless steel

Front wall: Bronze hairline stainless steel

Car door: Bronze hairline stainless steel

Operation panel: All-in-one control box, bronze hair lines stainless steel (OK21005)

Flooring: Full body marble tile (DB23005)

Layer door: Bronze hairline stainless steel



扫描二维码 观看电梯 360°全景



私人定制 徜徉自由空间



KC23022 有偿选配 Compensated optional

吊 顶: 黑钛镜面不锈钢+亚克力+平面光源 (DD23012)

后 壁: 黑钛发纹不锈钢+黑钛镜面不锈钢+灯带

侧 壁: 黑钛发纹不锈钢+黑钛镜面不锈钢

前 壁: 黑钛发纹不锈钢 轿门:黑钛发纹不锈钢

操纵箱: 一体式操纵箱, 黑钛发纹不锈钢(OK21005)

地 板: 大理石拼花 (DB23008)

层 门: 黑钛发纹不锈钢

Ceiling: Black titanium black mirror stainless steel

+ acrylic transparent plate + plane light source (DD23012) Back wall: Black titanium hairline stainless steel

+ black titanium mirror stainless steel + lamp belt

Side wall: Black titanium hairline stainless steel

+ black titanium mirror stainless steel

Front wall: Black titanium hairline stainless steel Car door: Black titanium hairline stainless steel

Operation panel: All-in-one control box,

black titanium hairline stainless steel (OK21005) Flooring: Marble mosaic (DB23008)

Layer door: Black titanium hairline stainless steel



扫描二维码 观看电梯 360°全景



吊 顶:铝合金黑色边框+亚克力+平面光源(DD23013)

后 壁: 镜面不锈钢+暗藏灯带

侧 壁: 木纹积层板 (尼欧彩橡)

前 壁: 镜面不锈钢

轿门: 镜面不锈钢

操纵箱: 一体式操纵箱, 镜面不锈钢 (OK21005)

地 板: 大理石 (DB23009)

层 门: 镜面不锈钢

Ceiling: Aluminum alloy black frame + acrylic +

plane light source (DD23013)

Back wall: Mirror stainless steel + hidden light strap

Side wall: Wood grain laminated board (Neo colored oak)

Front wall: Mirror stainless steel

Car door: Mirror stainless steel Operation panel: All-in-one control box,

304 mirror stainless steel (OK21005)

Flooring: Marble (DB23009)

Layer door: Mirror stainless steel





扫描二维码 观看电梯 360°全景



私人定制 徜徉自由空间



KC23024 有偿选配 Compensated optional

吊 顶: 喷砂镜面不锈钢+线型灯 (DD23014) 后 壁: 喷砂镜面不锈钢+黑钛镜面不锈钢+灯带

喷砂镜面不锈钢+黑钛镜面不锈钢

前 壁: 黑钛镜面不锈钢 轿 门:黑钛镜面不锈钢

操纵箱: 一体式操纵箱,黑钛镜面不锈钢(OK21005)

地 板: 大理石拼花 (DB23010)

层 门: 镜面不锈钢

Ceiling: Sandblasted mirror stainless steel + linear light (DD23014)

Back wall: Sandblasted mirror stainless steel

+ black titanium mirror stainless steel + lamp belt

Side wall: Sandblasted mirror stainless steel

+ black titanium mirror stainless steel

Front wall: Black titanium mirror stainless steel

Car door: Black titanium mirror stainless steel

Operation panel: All-in-one control box,

black titanium mirror stainless steel (OK21005) Flooring: Marble mosaic (DB23010)

Layer door: Mirror stainless steel





观看电梯 360°全景

▶ KC23030 有偿选配 Compensated optional

吊 顶: 金属烤漆造型+黑钛不锈钢边框+暗藏灯带 (DD23015)

后 壁:中间硬包布艺与真丝手绘画,四周木饰面镶金属边框,

两侧木饰面沟槽浑水漆

侧 壁:木饰面沟槽浑水漆

前 壁:黑钛镜面不锈钢

轿 门:黑钛镜面不锈钢

操纵箱:一体式操纵箱,黑钛镜面不锈钢(OK21005)

地 板: 大理石镶金属条 (DB23011)

层 门: 镜面不锈钢

Ceiling: Metal paint molding + black titanium stainless steel frame

+ hidden light belt (DD23015)

Back wall: Middle hard cloth and silk hand painting,

wood veneer around metal frame,

wood veneer on both sides of the groove muddy paint

Side wall: Grooved lacquer for wood finish

Front wall: Black titanium mirror stainless steel Car door: Black titanium mirror stainless steel

Operation panel: Integrated control box,

black titanium mirror stainless steel (OK21005) Flooring: Marble with metal strip (DB23011)

Layer door: Mirror stainless steel



扫描二维码 观看电梯 360°全景





OK17003

无偿选配 Free optional

扶手式操纵箱

Handrail operation panel

面板材质: 发纹不锈钢

按钮: 圆形超薄带辉光微动按钮

显示: LED数码显示

根据轿厢宽、深情况选择安装面

Panel material: hairline stainless steel

Button: round ultra-thin inching button with glow

Display: LED digital display

select installation surface according to the width and

depth of the car

注:层站<5, 轿厢扶手安装面净尺寸≥900mm; 层站>6, 详情请咨询公司营销经理。
Note: The station is less than 5, car handrail mounting surface net size is larger than 900mm; the station is more than 6, please consult company marketing manager.

OK21001

有偿选配 Paid optional

面板材质:钢化玻璃按钮:感应按钮 显示: 4.3寸TFT

玻璃感应操纵箱

Glass induction operation panel

Panel material: tempered glass Button: inductive button Display: 4.3-inch TFT



OK21002

有偿选配 Paid optional

面板材质:钢化玻璃按钮:电容触摸按钮

显示: 13.3寸32位真彩多媒体

多媒体触摸操纵箱

Multimedia touch operation panel

Panel material: tempered glass Button: capacitive touch button

Display: 13.3-inch 32-bit true color multimedia



CK21001

标配 Standard

壁挂式外呼

Wall mounted outbound call

面板材质:钢化玻璃 按钮:感应按钮 显示: 3.5寸点阵显示

Panel material: tempered glass Button: inductive button

Display: 3.5-inch dot matrix display

CK21002

有偿选配 Paid optional

壁挂式外呼

Wall mounted outbound call


面板材质:钢化玻璃 按钮:感应按钮 显示:4.3寸TFT显示

Panel material: tempered glass
Button: inductive button
Display: 4.3-inch TFT display





其他装潢 (有偿选配Paid optional)

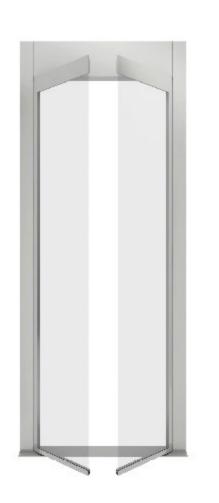



Double open automatic door

KL21001

门框、玻璃可选颜色 Door frame, glass optional color

厅门:铝合金门框+透明玻璃 Hall door: Aluminum alloy door frame+transparent glass




手拉门

Hand operated door

KL22002

门框、玻璃可选颜色 Door frame, glass optional color

厅门:铝合金门框+透明玻璃 Hall door: Aluminum alloy door frame+transparent glass

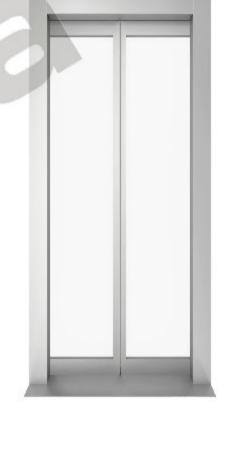

中分门

Center opening door


KL23001

门框、玻璃可选颜色 Door frame, glass optional color

厅门:铝合金门框+透明玻璃 Hall door: Aluminum alloy door frame+transparent glass

扶手

Handrail

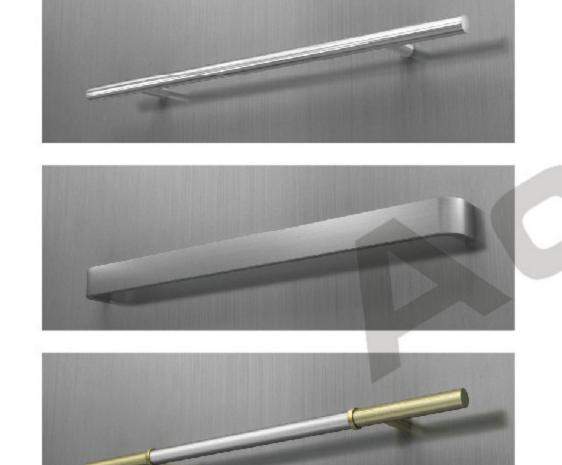

F16003

镜面不锈钢单管扶手 Mirror stainless steel single tube handrail

F16004

发纹不锈钢扁扶手 Hairline stainless steel flat handrail

F16010

钛金+不锈钢单管扶手 Titanium + stainless steel single tube handrail

Functions Table

功能表

基本功能	功能说明 Basic function
检修运行	电梯进入检修状态,系统取消自动运行以及自动门的操作。
自救平层运行	当电梯处于非检修状态下,且未停在平层区,此时只要符合起动的安全要求,电梯将自动以慢速运行至最近平层区,然后开门。
紧急电动运行	电梯控制柜内设置有紧急电动运行操作装置,用以替代手工盘车装置进行操作。
自动返基站	当超过设定时间,仍无内部指令和层站召唤时,电梯自动返回基站等候乘客。
满载直驶	在自动无司机运行状态,当轿内满载时(-般为额定负载的80%),电梯不响应经过的厅外召唤信号。
照明、风扇节电功能	当超过设定时间,仍无内部指令和层站召唤时,则自动切断轿厢内照明、风扇等电源。
错误指令取消	乘客在操纵箱内可以采用连续按动指令按钮两次的方法来取消上次错误登记的指令。
反向自动消号	当电梯运行到终端层站或者运行方向变更时,将此前所登记的反向指令全部自动取消。
重复关门	电梯持续关门一定时间后,若门锁尚未闭合,则电梯自动开门,然后重复关门。
本层厅外开门	在无其它指令或外召的情况下,若轿厢停靠在某一层站,按下该层站外的召唤按钮后,轿厢门自动打开。
关门按钮提前关门	电梯在自动运行模式下,处于开门保持时,可以通过关门按钮提前关门,以提高效率。
全集选	在自动状态,电梯在运行过程中,在响应轿内指令信号的同时,自动响应厅外上下召唤按钮信号,任何服务层的乘客,都可通过登记上下召唤信 召唤电梯。
轿厢到站钟	电梯按照乘客的要求到达目的楼层后,从轿顶板发出提示信号。
超载保护	当电梯内载重超过额定载重时电梯报警,停止运行。
门光幕保护	当关门过程中,门的中间有东西阻挡时,光幕保护动作,电梯转为开门。但光幕保护在消防操作时不起作用。
超速保护	保证轿厢运行时的速度在安全控制范围内,以保证乘客和货物的安全。
应急救援平层运行	电梯运行中停电,应急平层装置自动投入工作,运行至最近层站平层停车,打开轿门,乘客安全离开轿厢。
轿厢防扒门保护功能	轿厢门机设置有防扒门保护装置,可有效防止轿厢内乘客扒开轿门,保障乘客安全。
层门防脱槽保护功能	电梯层门设有防脱槽装置,可防止一般的撞击或某些人为使用不当造成的层门故障。
全面LED节能功能	电梯井道、轿厢内皆采用高效节能LED照明灯,与传统照明灯相比,可减少70%以上电能损耗,经济环保。
应急救援功能	无机房电梯因受空间限制,在电梯停电时无法在主机旁边手动松闸盘车,故设置了具有后备电池电动松闸装置进行远程操作,标配紧急电动松闸 置,方便救援。
限速器电动工作和复位	无机房电梯因受空间限制,无法在限速器旁边动作和复位,故设置了电动按钮进行远程操作。
无线远程五方通话 (一键呼救)	利用物联网模块可实现远程与维保救援人员、值班室人员紧急通讯,应急救援。
物联网	物联网模块可实现维保公司对电梯运行状态进行24小时监控,不间断记录电梯运行信息。

系统功能	功能说明 System function
井道参数自学习	系统在首次快车运行前,需要对井道的参数进行自学习,包括每层的层高、强迫减速开关位置。
直接停靠运行	以距离为原则,自动运算生成从启动到停车的平滑曲线,没有爬行,直接停靠在平层位置。
最佳曲线自动生成	系统根据需要运行的距离,自动计算出最适合人机功能原理的运行曲线,舒适平稳。
免脱负载电机参数识别	对于异步电动机,控制系统 可以 自动辨识电机的电阻、电感、空载电流等控制参数,以便精确控制电机;而对于永磁同步电动机,控制系统可以 完成旋转编码器的角度识 别 。
服务楼层设置	系统可根据需要灵活选择关闭或激活某个或多个电梯服务楼层及停站楼层。
自动修正轿厢位置	电梯每次运行到端站位置,系统自动根据第一级强迫减速开关检查和修正轿厢的位置信息,同时辅助特设强迫减速度降低冲顶和蹲底风险。
测试运行	测试运行包括新电梯的疲劳测试运行、禁止外召响应、禁止开关门、屏蔽端站限位开关、屏蔽超载信号等测试运行方法。
用户设定检查	用户可以通过该功能查找系统参数设置与出厂设置不一致的参数。
前后门服务楼层设置	系统可根据需要分别对前门和后门选择服务楼层。


系统功能	功能说明 System function
实时时钟管理	系统具有实时时钟芯片,无电源的情况下可以保证2年时钟工作正常。
强迫减速监测功能	系统在自动运行模式下,根据强迫减速开关位置、以及开关动作情况来监测、校正电梯轿厢的位置。
开关门控制功能选择	系统根据使用的门机种类的区别,可以灵活设置开门到位之后,关门到位之后的是否持续输出指令的模式。
保持开门时间分类设定	系统根据设定的时间自动判别召唤开门、指令开门、门保护开门、延时开门等不同的保持开门时间。
外召粘连识别	系统可以识别出厅外召唤按钮的粘连情况,自动去除该粘连的召唤,避免电梯由于外召唤按钮的粘连情况而无法关门运行。
层楼显示按位设置	系统允许每一层的显示使用0-9, 以及字母之中的任意字符排列组合显示,方便特殊状况使用。
运行方向滚动显示	电梯运行中,厅外显示板滚动显示运行 方向。
电梯状态显示	显示电梯的运行方向、所在层站、电梯状态(例如故障,检修)等情况。
跳跃层楼显示	灵活定义厅外显示板显示内容,可以根据需要将显示设置为非连续数据。
换站停靠	如果电梯在持续开门超过开门时间后,开门限位尚未动作,电梯就会变成关门状态,并在门关闭后,自动登记下一个层站运行;同时报E55号 故障提示。
电流斜坡撤除	在永磁同步电动机应用现场中,电梯运行减速停车后,电动机的维持电流通过斜坡的方式撤除,避免这个过程中电动机的异常噪声。
称重信号补偿	系统可以在特定应用场合中使用称重信号,对电梯的启动进行补偿。
故障历史记录	系统具有近10次的故障记录,包括故障产生的时间、楼层、代码等信息。
门区外不能开门的保护	系统在非门区状态,禁止自动开门。
逆向运行保护	系统对旋转编码器的反馈信号方向进行识别,在运行中判断电动机的实际运行方向,一旦为逆向运行则报警提示。
防打滑保护	在非检修状态,电梯运行过程中,如果连续运行了F9-02规定的时间(最大45秒)后,而且没有平层开关动作过,系统就认为检测到钢丝绳打滑故所以就停止轿厢一切运行。
接触器触点检测保护	电梯在运行或者停止状态下,检测到接触器的吸合状态异常时,系统自动保护。
电机过电流保护	检测到电机的电流大于最大允许值时,系统自动保护。
电源过电压保护	检测到电源电压大于最大允许值时,系统自动保护。
电机过载保护	检测到电机过载,系统自动保护。
编码器故障保护	全系统使用一个高速编码器来进行闭环矢量控制,如果该编码器发生故障,系统自动停机,杜绝因无法得知编码器故障引起的冲顶蹲底的故障。
井道自学习失败诊断	没有正确的井道数据,电梯将不能正常运行,因此在井道自学习未能正确完成时设置了井道自学习失败诊断。
驱动模块过热保护	检测到驱动模块过热,系统自动保护。
门开关故障保护	当检测到电梯开关门超过设定次数以后仍未有效关门,系统停止开关门并输出故障。
运行中门锁断开保护	电梯运行中检测到门锁断开,系统自动保护。
限位开关保护	上(下)限位开关动作后电梯禁止向上(下)运行,但是可以向反方向运行。
对地短路检测	系统在第1次上电的情况下可以对输出U、V、W进行检测,判断是否存在对地短路的情况。
平层开关故障保护	电梯在自动运行模式下,识别平层信号的粘连与丢失情况。
CPU故障保护	系统具有多个CPU,相互进行状态判断,−旦有异常则进行保护,封锁所有输出。
门锁短接保护	电梯在自动运行模式下,每次开门到位均识别门锁是否存在异常。
电机温度保护	系统检测到电机温度过热后,暂停电梯运行。
抱闸动作自动检测功能	系统对抱闸的每次动作都进行实时监控,如有异常,立即进行保护。

选配功能	功能说明 Optional function
IC卡用户管理	乘客必须持卡才能到达需授权才能进入的楼层。
语音报站	电梯运行过程中自动向乘客播报运行方向及即将到达的层站等信息。
残疾人操纵盘操作	当电梯平层时,如果该层楼有残疾人操纵箱的指令登记,则电梯开门保持时间增长;如果有残疾人操纵盘的开门指令,开门保持时间同样增长。
副操纵箱操作	在有主操纵箱的同时,还可选配副操纵箱。副操纵箱和主操纵箱一样,也装有指令按钮和开关门按钮,这些按钮和主操纵箱上的按钮的操作功能相同。

35

Construction Parameters

底托式砖混类土建参数

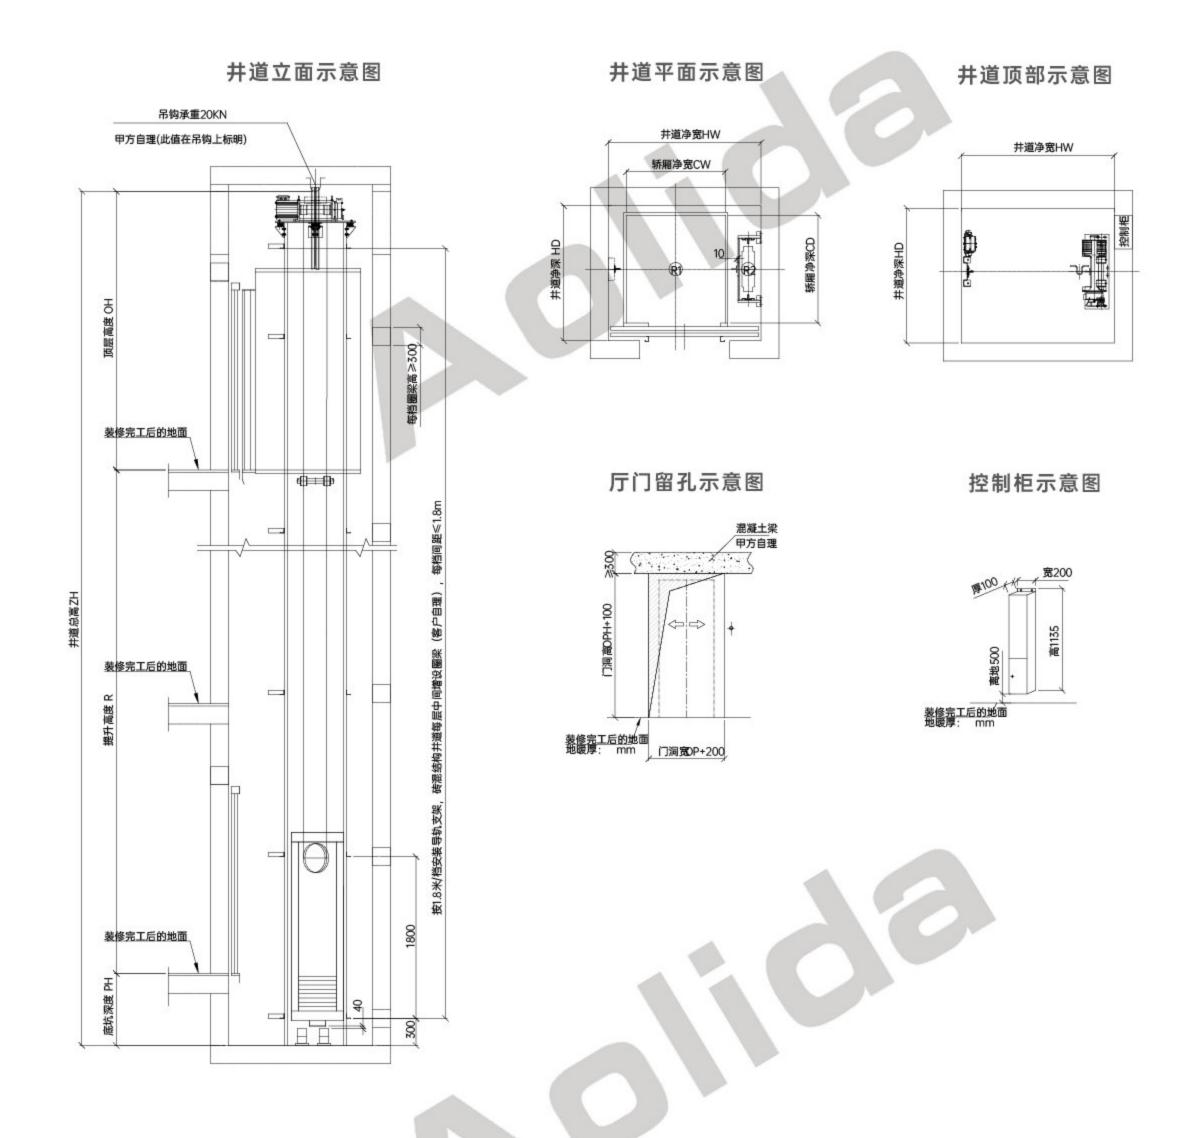


底托式钢带别墅梯参数表(砖混类) Parameter table of steel strip villa ladder (brick-type)

额定	载荷	额定速度		轿厢净尺寸	开门净尺寸			井道净尺寸				
kg	人	m/s	高 CH	宽 CW	深 CD	宽 OP	高 OPH	宽 HW	深 HD	底坑深 PH	顶层高 OH	其他
250	3	0.4	2250	900	1000	700	2000	1500	1350	300	2950	轮椅无法进入
320	4	0.4	2250	900	1100	700	2000	1500	1450	300	2950	轿厢
400	5	0.4	2250	1100	1200	800	2000	1700	1550	300	2950	轮椅可进入轿厢

注: 1.上述尺寸供设计参考,具体尺寸以合同签订提供的井道土建布置图为准。(采用不同吊顶,顶层高度取值不同,详情请咨询我司营销中心)

Construction Parameters

底托式型材类土建参数

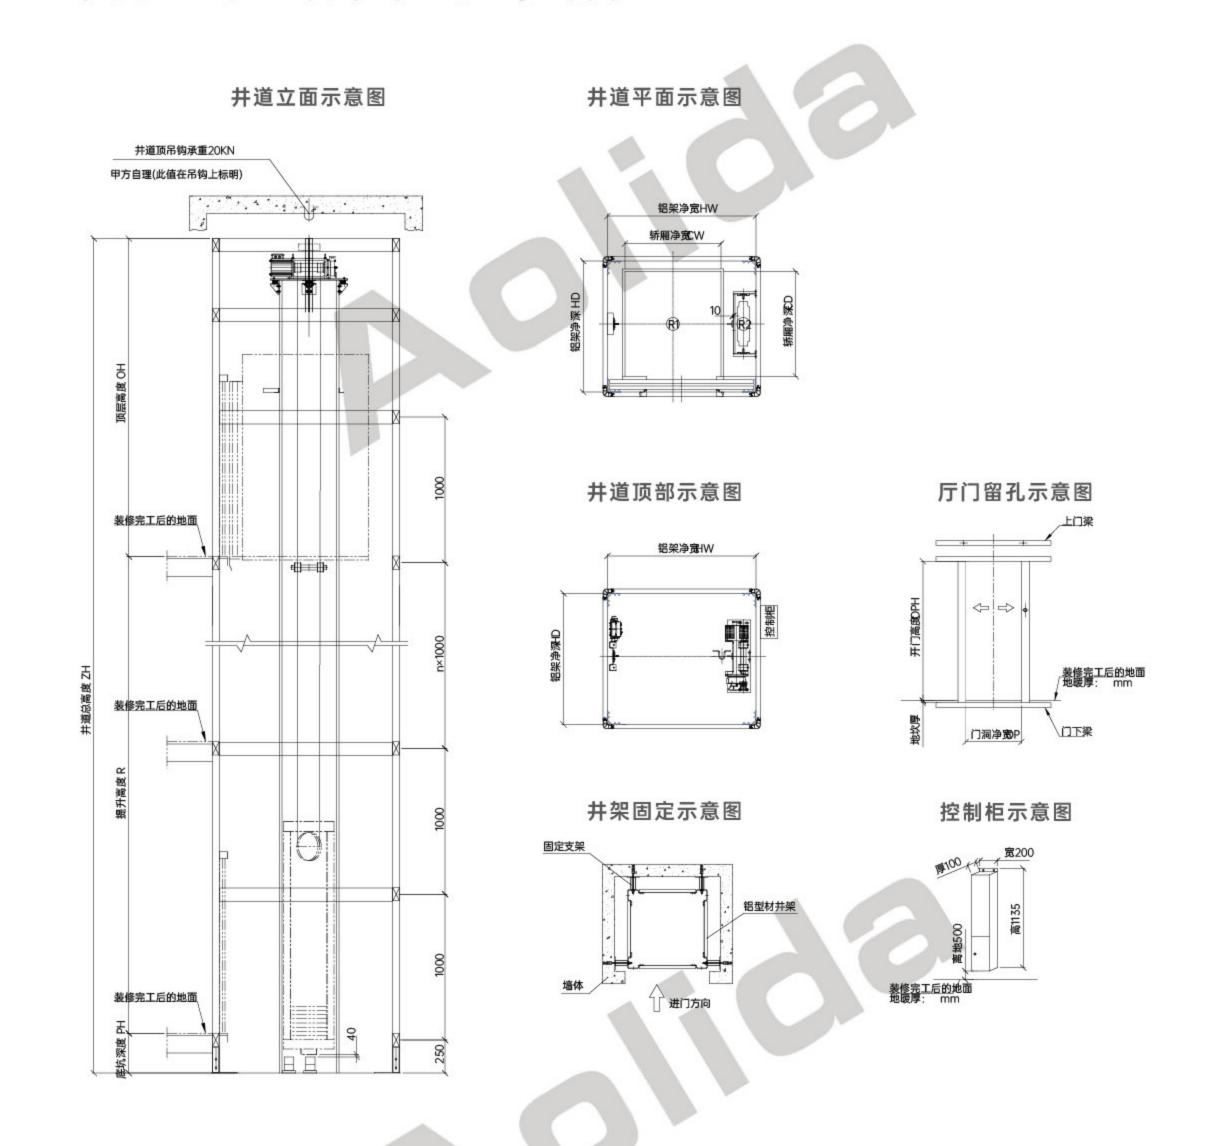

底托式钢带别墅梯参数表(型材类) Parameter table of steel strip villa ladder (section bar type)

额定量	載荷	额定速度		桥厢净尺寸		开门)	争尺寸		₩ /\b			
kg	人	m/s	高 CH	宽 CW	深 CD	宽 OP	高 OPH	宽 HW	深 HD	底坑深 PH	顶层高 OH	其他
250	3	0.4	2250	900	1000	700	2000	1500	1350	300	2950	轮椅无法进入
320	4	0.4	2250	900	1100	700	2000	1500	1450	300	2950	轿厢
400	5	0.4	2250	1100	1200	800	2000	1700	1550	300	2950	轮椅可进入轿厢

注:1.上述尺寸供设计参考,具体尺寸以合同签订提供的井道土建布置图为准。(采用不同吊顶,顶层高度取值不同,详情请咨询我司营销中心)

^{2.}如选用观光款别墅电梯,顶层高度及底坑深度等尺寸请参照观光电梯样册执行。

Note: 1. The above dimensions are for the design reference, the specific size shall prevail to the roadway construction layout provided by the signed contract. (Different ceiling, different values of the rooftop height are being used, please contact our marketing center about details)

^{2.} If choosing the sightseeing villa elevator, the dimensions of the rooftop height and the depth of the pit and others shall refer to the implementation from the sightseeing elevator sample book.


^{2.}如选用观光款别墅电梯,顶层高度及底坑深度等尺寸请参照观光电梯样册执行。

Note: 1. The above dimensions are for the design reference, the specific size shall prevail to the roadway construction layout provided by the signed contract. (Different ceiling, different values of the rooftop height are being used, please contact our marketing center about details)

^{2.} If choosing the sightseeing villa elevator, the dimensions of the rooftop height and the depth of the pit and others shall refer to the implementation from the sightseeing elevator sample book.

Construction Parameters

顶吊式砖混类土建参数

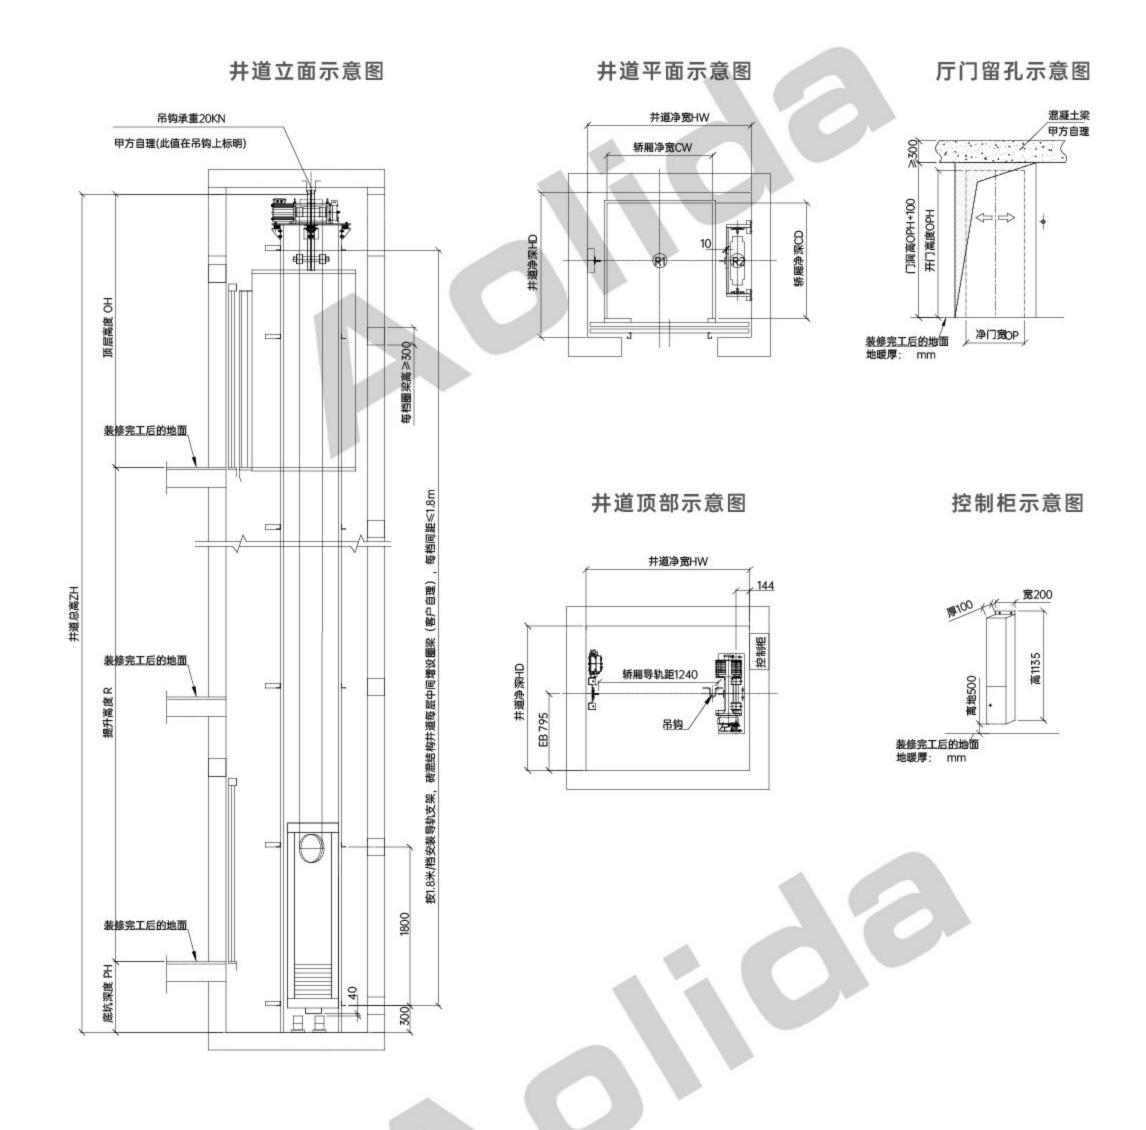


顶吊式钢带别墅梯参数表(砖混类) Parameter table of steel strip villa ladder (brick-type)

额定	载荷	额定速度		轿厢净尺寸 开门净尺寸 井道净尺寸						++ /\b		
kg	人	m/s	高 CH	宽 CW	深 CD	宽 OP	高 OPH	宽 HW	深 HD	底坑深 PH	顶层高 OH	其他
250	3	0.4	2250	900	1000	700	2000	1500	1350	300	3100	轮椅无法进入
320	4	0.4	2250	900	1100	700	2000	1500	1450	300	3100	轿厢
400	5	0.4	2250	1100	1200	800	2000	1700	1550	300	3100	轮椅可进入轿厢

注: 1.上述尺寸供设计参考,具体尺寸以合同签订提供的井道土建布置图为准。(采用不同吊顶,顶层高度取值不同,详情请咨询我司营销中心)

Construction Parameters

顶吊式型材类土建参数

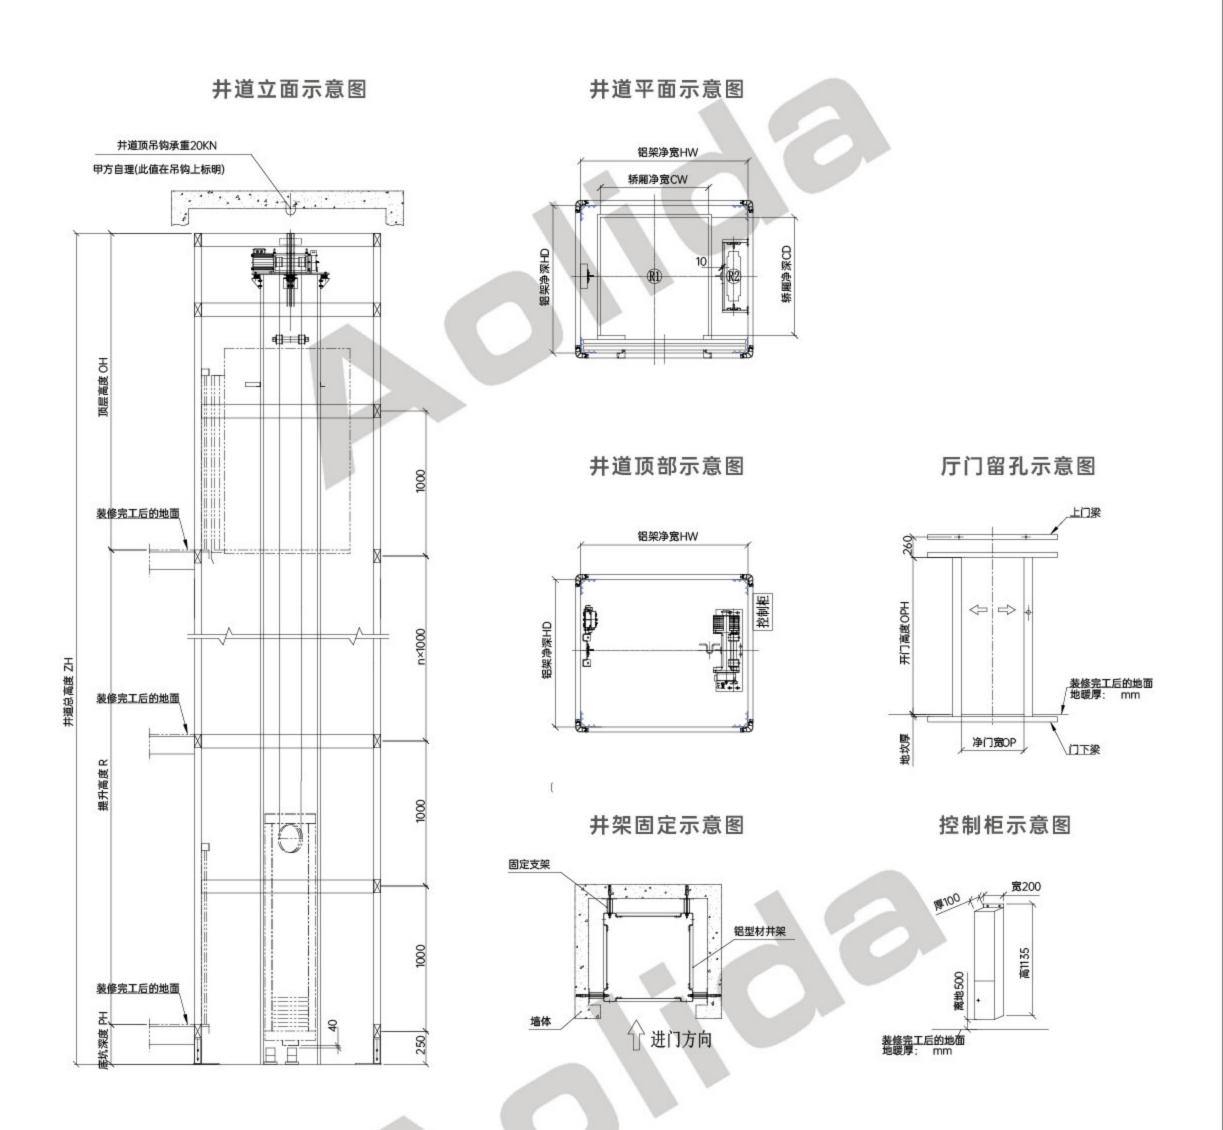

顶吊式钢带别墅梯参数表(型材类) Parameter table of steel strip villa ladder (section bar type)

额定量	載荷	额定速度		桥厢净尺寸		开门)	争尺寸		₩ /\b			
kg	人	m/s	高 CH	宽 CW	深 CD	宽 OP	高 OPH	宽 HW	深 HD	底坑深 PH	顶层高 OH	其他
250	3	0.4	2250	900	1000	700	2000	1500	1350	300	3100	轮椅无法进入
320	4	0.4	2250	900	1100	700	2000	1500	1450	300	3100	轿厢
400	5	0.4	2250	1100	1200	800	2000	1700	1550	300	3100	轮椅可进入轿厢

注: 1.上述尺寸供设计参考,具体尺寸以合同签订提供的井道土建布置图为准。(采用不同吊顶,顶层高度取值不同,详情请咨询我司营销中心)

^{2.}如选用观光款别墅电梯,顶层高度及底坑深度等尺寸请参照观光电梯样册执行。

Note: 1. The above dimensions are for the design reference, the specific size shall prevail to the roadway construction layout provided by the signed contract. (Different ceiling, different values of the rooftop height are being used, please contact our marketing center about details)

^{2.} If choosing the sightseeing villa elevator, the dimensions of the rooftop height and the depth of the pit and others shall refer to the implementation from the sightseeing elevator sample book.

^{2.}如选用观光款别墅电梯,顶层高度及底坑深度等尺寸请参照观光电梯样册执行。

Note: 1. The above dimensions are for the design reference, the specific size shall prevail to the roadway construction layout provided by the signed contract. (Different ceiling, different values of the rooftop height are being used, please contact our marketing center about details)

^{2.} If choosing the sightseeing villa elevator, the dimensions of the rooftop height and the depth of the pit and others shall refer to the implementation from the sightseeing elevator sample book.