UTILITY FLEET SOLUTIONS | 178 Muddy Creek Church Rd. Denver, PA 17517

Phone: 800.952.4228 Web: MGSUtilityFleet.com

ECF20260

26K Four Reel Cable Trailer

GENERAL


- GVWR: 34,000 Lbs.
- GAWR: 15,000 Lbs.
- Estimated Empty Weight: 7,300 Lbs.
- Total Capacity: 26,400 Lbs.
- Hitch: 3" Towing Eye, 4 Bolt 60K, 18" – 26" Adjustable
- Safety Chains: 3/8" Grade 70 Chain with Clevis Mount Slip Hook

DIMENSIONS

- Overall: 362"L x 96"W x 78"H
- Deck: 293"L x 96"W x 36"H

RUNNING GEAR

- Tires: 215/75R 17.5 dual
- Wheels: 17.5 x 6.75 with 8 bolts on a 6.5" bolt circle
- Brakes: Electric
- Axles: (2) 15,000 Lbs. Underslung Type

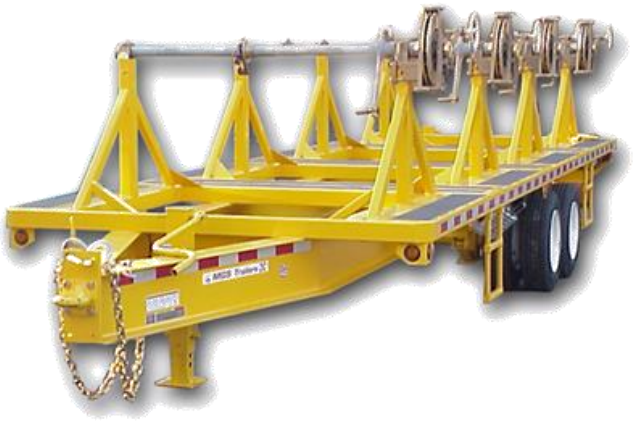

FRAME

- Frame Rails: 12" x 26" Beam ASTM A36
- Cross Members: 4" x 3" Structural Tube

REEL GEAR

- (4) 72"Ø x 52"W x 8,000lb. Cable Reels
- 2.5" Galvanized Spindle Bar with Tapered Set Collar and Power Arm

BRAKES

- (4) Manual adjust, Vented, 16", Bronze Alloy Tension Brakes. 5,000lb. ft. Rotational Torque, 525°F Max Operating Temp

ELECTRICAL

- MGS Solar Maintained Breakaway Battery w/ Status Light
- Electrical Connection: 7 Pin Plug Coiled Cord
- Receptacle: J560 w/ Housing
- Lighting / Conspicuity: To D.O.T.: LED, Shock Mounted in Rubber Grommets, Conspicuity Tape
- (2) Taillight System – STT Combined
- Junction Box: MGS #77237

FINISH

- Trailer Finish: Paint or Hot Dipped Galvanizing
- All Non-Galvanized Parts – Spectrum Gray

OTHER

- Manual Holder
- Registration Holder: Waterproof