

**Armstrong**Flooring™

# **Natural Creations™ ArborArt**

Luxury Vinyl PLank




Cover Image: Summer Oak

# Natural Creations™ ArborArt

## 2.5mm Luxury Vinyl Plank

Natural Creations ArborArt Luxury Vinyl Plank collection is Australian local stocked. Featuring superior coating technology, Natural Creations™ is both beautiful and practical, while being kind to our planet.

ArborArt is slip resistant (P3 and R10), 100% waterproof, highly durable (0.55mm wear layer), resistant to scuffs, scratches, and stains. Unmatched against heavy foot traffic, the range will stand the test of time, while giving a timeless interior finish with the nature inspired designs.

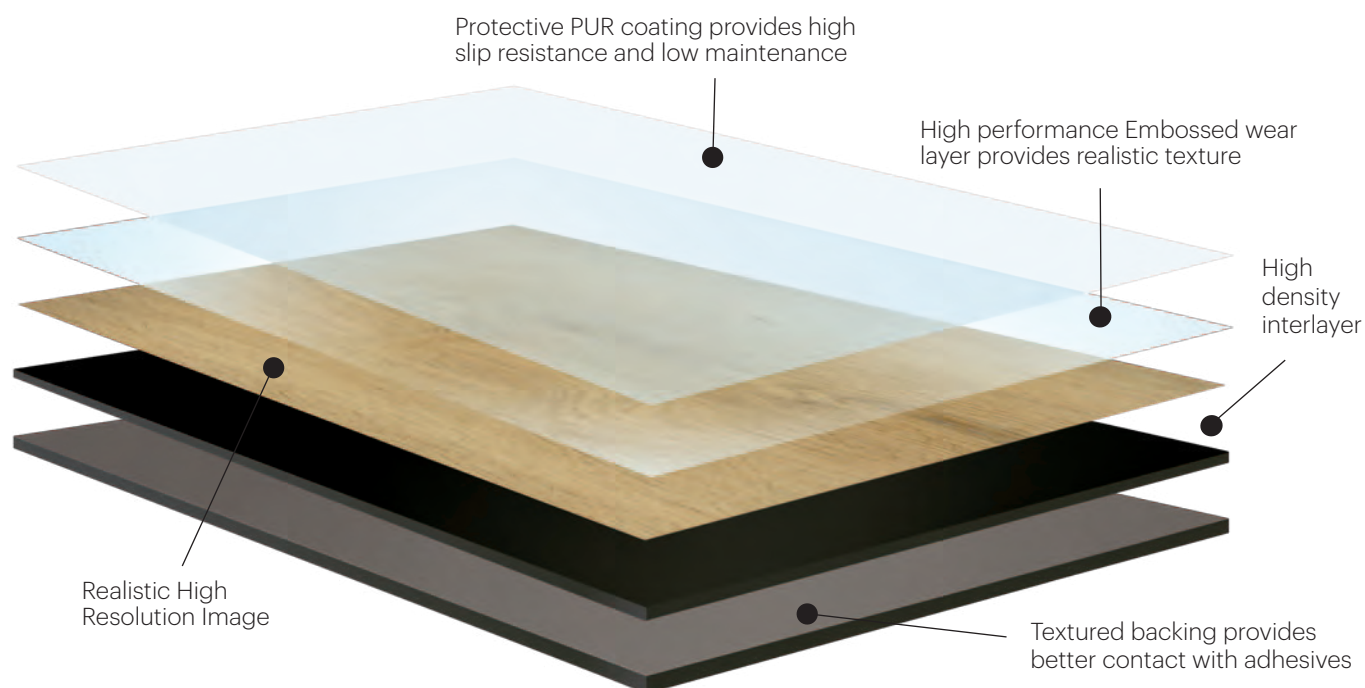

### Upload your own photo



Use the Armstrong Flooring Design My Room tool to see and show the dramatic impact flooring can make on your project.

Try Design My Room and see your room transform!





## APPLICATIONS



Retail



Hospitality



Office



Education



Residential

## PERFORMANCE

P3

### Slip Resistance

- P3 – Wet Pendulum
- R10 – Oil wet inclining platform (ramp)



### 100% waterproof

- Perfect for areas that often see spills



### Large format planks

- 185 x 1500mm planks
- Quick and easy to install



### Low Maintenance

- Protective Polyurethane Wear Layer reduces initial and ongoing maintenance
- Easy to clean



### Sustainable

- GreenTag rated (GreenRate Level A)
- Phthalate Free and Ultra-low VOC
- Fully recyclable



### Hygienic

- Enhanced PUR coating provides resistance to soiling



### Stain Resistance

- Repels dirt, spills and stains
- Pets and kids friendly



### On tread designs

- Featuring Australian Species
- 22 colours, our biggest range yet



### Underfloor heating

- Compatible with underfloor heating system up to 27°C



### Durable

- 0.55mm commercial wear layer
- Classified as Commercial 33 (heavy) and industrial 42 (general)



Shadow Oak  
3L11906



## Australian Species

Including Spotted Gum, Blackbutt, and Tasmanian Oak, ArborArt features Australia's most sought after timber designs.

Morning Spotted Gum  
3L389001





Twilight Tasmanian Oak  
3L388801



RETAIL





Victorian Ash  
3L162240









Summer Oak  
3L195603







# Classic Oak

Introducing ArboArt's timeless Oak Collection.  
A modern capsule of elevated essentials.

Vintage Timber  
3L111802



RETAIL





Country Ironbark-  
3L105207



HOSPITALITY





Limed Oak  
3L11907





Weathered Oak  
3L133210





Shadow Oak  
3L11906





# Natural Creations™ ArborArt

P3

R10

SLIP RESISTANCE

Available in 2.5 x 185 x 1500mm Planks



SUMMER OAK — 3L195603



WEATHERED OAK — 3L133210



VICTORIAN ASH — 3L162240



VINTAGE TIMBER — 3L111802



# Natural Creations™ ArborArt

P3

R10

SLIP RESISTANCE

Available in 2.5 x 185 x 1500mm Planks



TWILIGHT TASMANIAN OAK — 3L388801



SUNRISE BLACKBUTT — 3L388901



MORNING SPOTTED GUM — 3L389001



SUNSET BARNYARD GREY — 3L168011



# Natural Creations™ ArborArt

P3

R10

SLIP RESISTANCE

Available in 2.5 x 185 x 1500mm Planks



WILDWOOD CLASSIC — 3L172211



HERITAGE OAK — 3L057015



COUNTRY IRONBARK — 3L105207



AUTUMN BARNWOOD — 3L102605



# Natural Creations™ ArborArt

Available in 2.5 x 185 x 1500mm Planks

P3

R10

SLIP RESISTANCE



LIMED OAK — 3L111907



SHADOW OAK — 3L111906



WASHED EBONY — 3L111903






CARBON OAK — 3L165211



## Natural Creations™ ArborArt

### Product Classification

Type of floor covering	EN / ISO 10582	Heterogeneous – Luxury Vinyl Plank			
Domestic classification	ISO 10874	23 (Heavy)			
Commercial classification	ISO 10874	33 (Heavy)			
Light industrial classification	ISO 10874	42 (General)			

### Physical Properties

Overall thickness	ISO 24346	2.50mm			
Wear layer thickness	ISO 24340	0.55mm			
Polyurethane reinforced	—	Yes			
Squareness and straightness	ISO 24342	Deviation allowed at any point			
≤ 400mm		≤ 0.25mm (Pass)			
> 400mm		≤ 0.35mm (Pass)			
Bevelled edge	—	Yes			
Size (mm)	ISO 24342	185 x 1500	184 x 1219	229 x 1219	152 x 1219
Packaging	Planks/carton m <sup>2</sup> /carton	10 2.77	15 3.36	12 3.34	18 3.34

### Technical Performance

Residual indentation	ISO 24343	≤ 0.1mm (Pass)			
Colour fastness	ISO 105-B02	≥ 6 (Pass)			
Wear resistance	EN 660-2	Group T			
Effect of castor chair	ISO 4918	> 25,000 cycles (Pass)			
Dimensional stability	ISO 23999	≤ 0.25% (Pass)			

### Fire & Slip Performance

Critical radiant flux	AS ISO 9239-1	≥ 8kW/m <sup>2</sup>			
Smoke development rate	AS ISO 9239-1	≤ 750%.minutes			
Wet pendulum	AS 4586 (App. A)	P3			
Oil-wet inclining platform	AS 4586 (Appendix D)	R10			

### Environment & Sustainability

GBCA rating	—	GreenTag Level A			
Recyclable	—	Yes			
TVOC Emissions	EN 13419-1	Compliant low emitting VOC emissions			

### Installation

Installation to current AS1884	Full stick, LVT-100 adhesive recommended as per Armstrong's installation instructions				
--------------------------------	---	--	--	--	--