



Code

AH953I

Model

FISH 400 BLACK 115/60



Intertek
5028503



Intertek
5028503

Conformity


UL 60335-1
 UL 60335-2-89
 CAN/CSA-C22.2 No. 60335-1
 CAN/CSA-C22.2 No. 60335-2-89
 NSF/ANSI 7

Building characteristics

INSIDE covering			Mirror-polished S/S /
OUTSIDE covering			Black plastic-coated S/S / FULL GLASS DOOR
Internal temp range			[+28.4°F ÷ +50°F]
Thickness of insulation: High density polyurethane foam (42 kg/m ³) without HCFC	in.		1.97
Voltage V-Ph-Hz			115/1N/60
Absorbed Power / Current			Kw .57 / Amps 6.1
Includes:	n° 2 pairs of S/S shelf brackets - n° 2 S/S wire shelves 18.11x18.50 inches hook rail with 2 hooks rod (for fish 110.23 lbs)		
Electronic controller			TOUCHSCREEN
HACCP Loggin Function			✓
USB			✗
WIFI/Bluetooth Connection			✓
Key lock			✓
Internal light			✓
U.V. Lamps			✓
Water condensing unit			Optional
Net Weight	lbs.		242
		Packed	264.6
Cooling Capacity	ASHRAE	Watt	T. evap. +14°F / +131°F T.cond TN 401

Capillary / Thermostatic Valve			Cap.
Evaporator fan	Ø - Watt-Volt		1x9.84Ø-12W-115V
Defrosting/heating	Watt		275W x 1/200W x 2
Relative humidity			40% - 90%
Internal storage capacity	lbs.		132.28
Compressor			DLE4.8CN
Condenser fan	Ø - Watt-Volt		1x7.87Ø-12W-115V
Refrigerant	oz.		R290 GWP: 3 3.17
Noise	Db(A)		48.1

Code	AH9531
Model	FISH 400 BLACK 115/60
External dimensions packed	25.20" x 31.10" x 82.91"

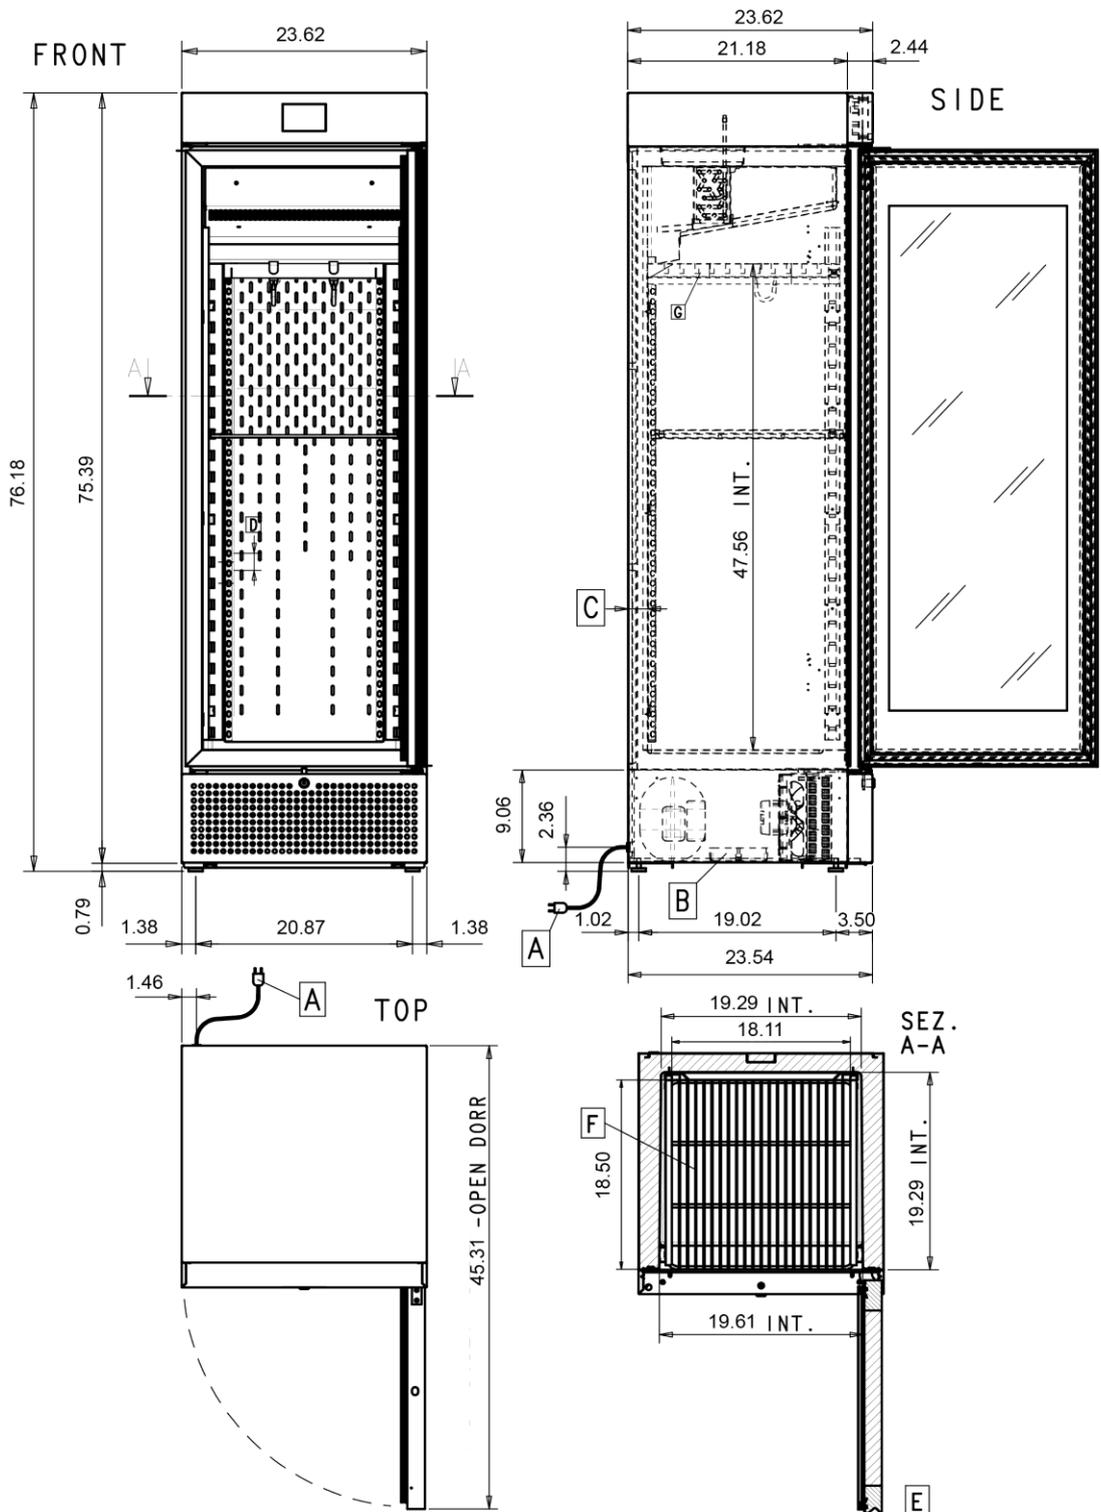

DIMENSIONS in INCHES

- A = Electrical connection L. 6.9 ft
- B = Condensate drain pan
- C = 1.97 inches thick insulation
- D = Rack pitch 2.09 inches
- E = Right hinged door. left hinged option available
- F = N°2 stainless steel wire shelves 18.11x18.50 inches included
- G = Hook rail for fish with 2 hooks rod

La ditta Everlasting s.r.l si riserva il diritto di apportare ai propri prodotti quelle modifiche tecniche e stilistiche che riterrà necessarie o utili senza pregiudicare le caratteristiche essenziali. Everlasting reserves the right to modify technical and stylistic features of its products without any prior notice, should such modifications be necessary or useful and not affecting any essential features of the product itself.