
# TANK SPECIFICATIONS

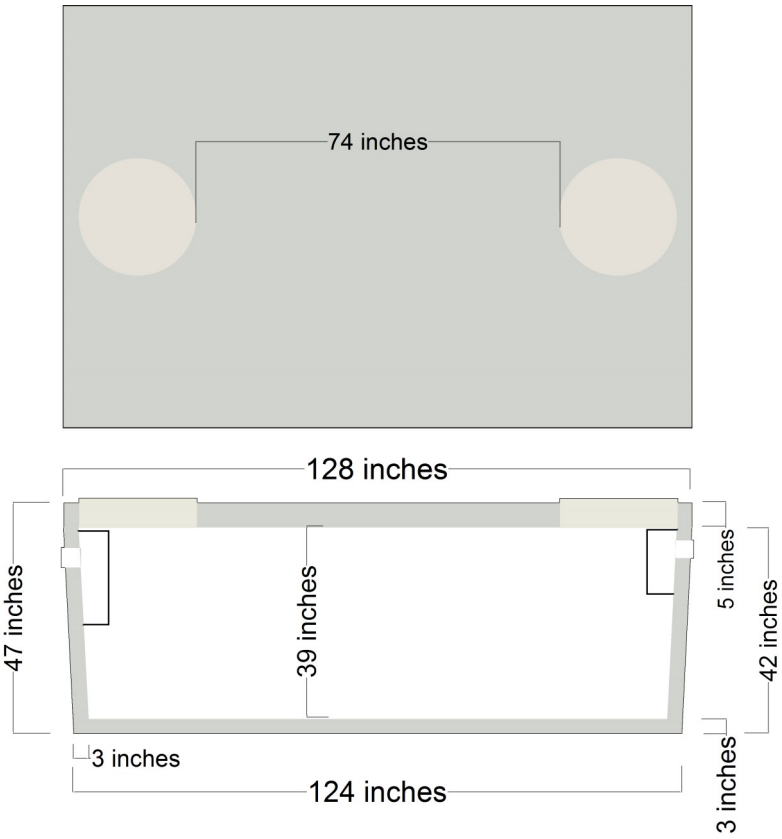


ALL ACCESS OPENINGS
ARE 24" I.D.

ALL BAFFLES HAVE A MINIMUM 1"
AIR SPACE BETWEEN COVER AND
TOP OF BAFFLE

## CAPACITY:
1250 GALLONS

## DIMENSIONS:
LENGTH = 128" AT TOP,
124" AT BOTTOM
WIDTH = 86" AT TOP,
82" AT BOTTOM
OVERALL HEIGHT = 52"
DEPTH BELOW INLET = 36"
DEPTH BELOW OUTLET = 34"

## INLET AND OUTLET BAFFLES:
POLYETHELENE w/STAINLESS
STEEL CONNECTORS

## INLET BAFFLE:
13" (7" ABOVE LIQUID LEVEL,
6" BELOW LIQUID LEVEL)
19%

## OUTLET BAFFLE:
19" (6 5/8" ABOVE LIQUID LEVEL,
12 3/8" BELOW LIQUID LEVEL)
40%

## LIQUID CAPACITY:
41.67 GAL PER INCH
31" LIQUID DEPTH

**REGISTERED IN MINNESOTA FOR SEVEN FEET OF COVER ON TOP OF THE TANK.**

D-1250

# MODEL: DARWIN 1250

SEPTIC TANK/HOLDING TANK
1625 GALLONS

TANK WEIGHT 11,142 LBS


Precast Systems Inc.

PO Box 56, Darwin MN 55324
320-693-8440 888-693-8440