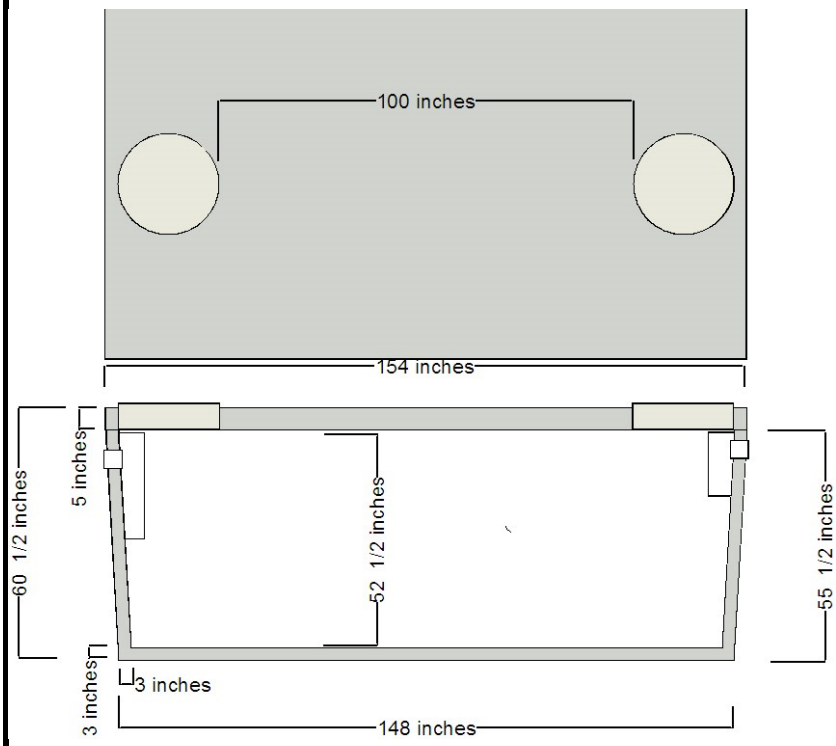


ALL ACCESS OPENINGS ARE
24" I.D.

ALL BAFFLES HAVE A MINIMUM 1"
AIR SPACE BETWEEN COVER AND
TOP OF BAFFLE

TANK SPECIFICATIONS

CAPACITY:

2000 GALLONS

DIMENSIONS:

LENGTH = 154" AT TOP
148" AT BOTTOM
WIDTH = 84" AT TOP
78" AT BOTTOM
OVERALL HEIGHT = 65"
DEPTH BELOW INLET = 48"
DEPTH BELOW OUTLET = 46"

INLET AND OUTLET BAFFLES:

POLYETHELENE w/STAINLESS
STEEL CONNECTORS

INLET BAFFLE:

15" (8" ABOVE LIQUID LEVEL,
7" BELOW LIQUID LEVEL)
16.25%

OUTLET BAFFLE:

25 1/4" (8" ABOVE LIQUID LEVEL,
17 1/4" BELOW LIQUID LEVEL)
40%

LIQUID CAPACITY:

47.62 GAL PER INCH
43" LIQUID DEPTH

REGISTERED IN MINNESOTA FOR SEVEN FEET OF COVER ON TOP OF THE TANK.

D-2000

MODEL: DARWIN 2000

SEPTIC TANK/HOLDING TANK
2500 GALLONS
TANK WEIGHT 13799 LBS

Precast
Systems
Inc.

PO Box 56, Darwin MN 55324
320-693-8440 888-693-8440