





# You know it, when you see it.

It's not just a roof. It's a CertainTeed roof.

Quality. Durability. Style. Color.

When you select a roof for your home, there's a lot to consider.







That's when a roof becomes more than just a roof. The same way a home is more than just a house.

You want the best for your home and everything in it.

So why guess, when you can be Certain?





# Symphony

- A specially-engineered composite shingle that mimics the look and feel of natural slate
- · Lighter and more durable than natural slate
- Exceptional UV fade-resistant surface technology for superior color stability
- 50-year limited, transferable warranty\*
- 7-year SureStart™ protection
- 5-year 90 mph wind-resistance warranty
- ENERGY STAR® qualified
- · Hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

• UL Class A (with approved underlayment)

#### Wind Resistance:

· ASTM D3161, 90 mph wind resistance

#### **Impact Resistance:**

• UL2218 Class 4

#### Color Availability





























# GRANDMANOR"

- · Two full-size, fiber glass base shingles with randomly applied tabs
- · Authentic depth and dimension of natural slate
- · Virtual five-layer coverage when applied
- · 425 lbs. per square
- · Lifetime limited transferable warranty residential\*
- · 50-year limited transferable warranty group-owned or commercial\*
- 15-year StreakFighter™ warranty
- . 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
   CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- · UL certified to meet ASTM D3018 Type 1
- ASTM D3161, Class F, 110 mph wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- · CSA standard A123.5

#### Impact Resistance:


· UL2218 Class 2

#### Wind Driven Rain Resistance:

· Miami-Dade Product Control Acceptance

#### **Quality Standards:**

• ICC-ES-ESR-1389

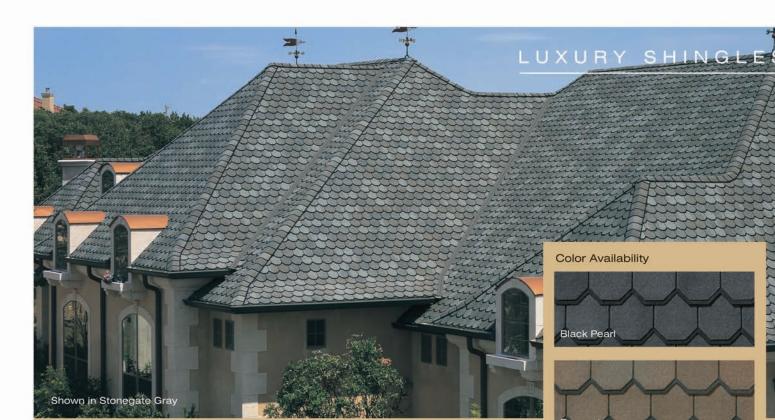

### CARRIAGE HOUSE

- · Two full-size, fiber glass base shingles
- · Unique chamfered cut for scalloped appearance
- · Four-layer coverage when applied
- · 355 lbs. per square
- · Lifetime limited transferable warranty residential\*
- · 50-year limited transferable warranty group-owned or commercial\*
- 15-year StreakFighter™ warranty
- . 10-year SureStart™ protection
- · 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
   CertainTeed starter and CertainTeed hip and ridge required
- · Hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- · UL certified to meet ASTM D3018 Type 1
- · ASTM D3161, Class F, 110 mph wind resistance

#### **Tear Resistance:**

- · UL certified to meet ASTM D3462
- · CSA standard A123.5

#### Impact Resistance:

UL2218 Class 1

#### Wind Driven Rain Resistance:

· Miami-Dade Product Control Acceptance

#### **Quality Standards:**

• ICC-ES-ESR-1389

#### **GRAND MANOR and CARRIAGE HOUSE SHINGLES**

These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.














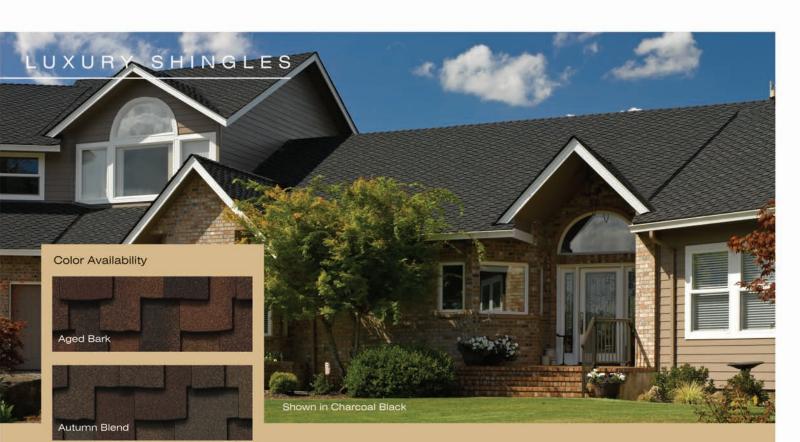













### PRESIDENTIAL SHAKE™ TL

Triple Laminate

- Three-piece laminated fiber glass construction
- · Distinctive sculpted, rustic look
- · 480 lbs. per square
- · Lifetime limited transferable warranty residential\*
- 50-year limited transferable warranty group-owned or commercial\*
- . 15-year StreakFighter™ warranty
- . 10-year SureStart™ protection
- · 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
   CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- · ASTM D3161, Class F, 110 mph wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### Wind Driven Rain Resistance:

· Miami-Dade Product Control Acceptance


#### **Quality Standards:**

• ICC-ES-ESR-1389



# Autumn Blend\*\*







Chestnut













### PRESIDENTIAL SHAKE®

- · Two-piece laminated fiber glass construction
- · Distinctive sculpted, rustic look
- · 355 lbs. per square
- · Lifetime limited transferable warranty residential\*
- 50-year limited transferable warranty group-owned or commercial\*
- . 15-year StreakFighter™ warranty
- . 10-year SureStart™ protection
- · 15-year 110 mph wind-resistance warranty
- · Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- · Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- Impact Resistant version available (select colors\*\*)
- · Available in Presidential Solaris version, an ENERGY STAR® qualified roof product that meets both solar reflectance and thermal emissivity requirements. (select colors\*\*\*)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- · ASTM D3161, Class F, 110 mph wind resistance

#### Impact Resistance:

· Presidential Shake IR is UL2218, Class 4 Impact Resistance (select colors only)

#### Tear Resistance:

- · UL certified to meet ASTM D3462
- · CSA standard A123.5

#### Wind Driven Rain Resistance:

Miami-Dade Product Control Acceptance

#### **Quality Standards:**

ICC-ES-ESR-1389

















# LANDMARK" TL

Triple Laminate

- Three-piece laminated fiber glass construction
- · Rustic appearance of hand-split wood shakes
- · 305 lbs. per square
- · Lifetime limited transferable warranty residential\*
- · 50-year limited transferable warranty group-owned or commercial\*
- . 15-year StreakFighter™ warranty
- 10-year SureStart™ protection
- · 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
   CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- · ASTM D3161, Class F, 110 mph wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- · CSA standard A123.5

#### Wind Driven Rain Resistance:

· Miami-Dade Product Control Acceptance

#### **Quality Standards:**

ICC-ES-ESR-1389



### LANDMARK $^{\circ}$ PRO

- · Two-piece laminated fiber glass base construction
- · Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- · Lifetime limited transferable warranty residential\*
- 50-year limited transferable warranty group-owned or commercial\*
- . 15-year StreakFighter™ warranty
- 10-year SureStart™ protection
- · 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
   CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- · ASTM D3161 wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### Wind Driven Rain Resistance:

· Miami-Dade Product Control Acceptance

#### **Quality Standards:**

• ICC-ES-ESR-1389


#### Also available in Landmark™ Premium:

A heavier weight product (300 lb. per square) available in two maximum definition colors (Max Def Moire Black and Max Def Weathered Wood) with the same warranties and performance ratings as Landmark Pro.

#### Color Availability



























\* Not available in all areas



Weathered Wood

Georgetown Gray

Heather Blend

## *LANDMARK*

- · Two-piece laminated fiber glass base construction
- · Classic shades and dimensional appearance of natural wood or slate
- · 240 lbs. per square
- · Lifetime limited transferable warranty\*
- . 10-year StreakFighter™ warranty
- . 10-year SureStart™ protection
- · 15-year 110 mph wind-resistance warranty
- · Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- · CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- · ASTM D3161 wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### Wind Driven Rain Resistance:

· Miami-Dade Product Control Acceptance

#### **Quality Standards:**

• ICC-ES-ESR-1389

Best Bu As ranked by a leading Consumer Magazine.

Shown in Weathered Wood



## *LANDMARK*

#### Impact Resistant

- · Fiber glass-based construction
- · 250 lb. per square
- · Lifetime limited transferable warranty\*
- . 10-year SureStart™ protection
- 10-year StreakFighter™ warranty
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
   CertainTeed starter and CertainTeed hip and ridge required
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

· UL Class A

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- · ASTM D3161 wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5-98

#### **Impact Resistance:**

• UL2218 Class 4


#### Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance

#### **Quality Standards:**

· ICC-ES-ESR-1389

















# DESIGNER SHINGLES

#### Color Availability

#### **LANDMARK SOLARIS**



#### LANDMARK SOLARIS GOLD











#### LANDMARK SOLARIS PLATINUM





# **Solaris**


#### SOLAR REFLECTIVE SHINGLES

- · Two-piece laminated fiber glass-based construction
- · Classic shades and dimensional appearance of natural wood or slate
- · 250 lbs. per square
- · Meets ENERGY STAR® requirements
- Lifetime limited transferable warranty residential\*
- · 50-year limited transferable warranty group-owned or commercial\*
- 15-year StreakFighter™ warranty
- 10-year SureStart™ protection
- · 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version available (select colors\*\*)
- \* See warranty for specific details and limitations.

### Landmark Solaris Solar Reflectivity (SR), Thermal Emittance (TE) & Solar Reflectnce Index (SRI) Data

Solaris Blend Name	CRRC Initial SR	CRRC Initial TE	ASTM E408 TE	Solar Reflectance Index (SRI)*	
LANDMARK SOLARIS					
Aged Cedar	.26	.92	.95	29	
Crystal Gray	.27	.92	.95	30	
Dusky Clay	.26	.93	.95	29	
Sunset Shake	.26	.92	.95	29	
LANDMARK SOLARIS GOLD					
Max Def Burnt Sienna	.26	.91	.95	29	
Max Def Heather Blend	.26	.93	.96	29	
Max Def Resawn Shake	.26	.88	.96	29	
Max Def Stonegate Gray	.26	.91	.95	29	
Max Def Weathered Wood	.26	.90	.95	29	
LANDMARK SOLARIS PLATINU	VI				
Sierra Buff	.41	.92	.95	48	
Coastal Tan	.40	.91	.95	47	
Santa Fe	.40	.90	.94	47	

<sup>\*</sup> Solar Reflectance Index (SRI) values were calculated using ASTM E408 TE values.

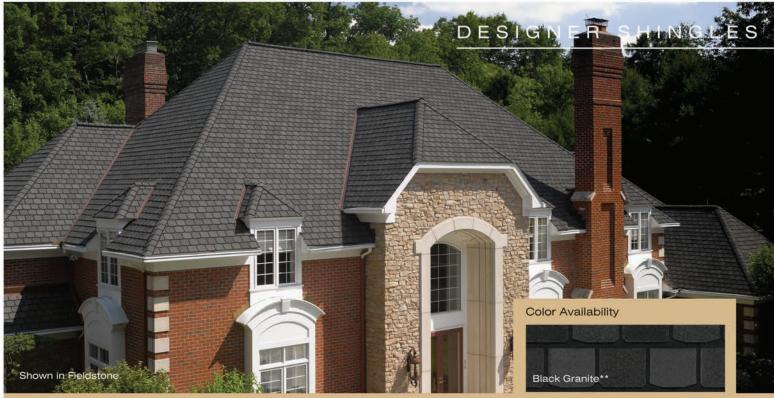

# Highland Slate"

- · Single layer fiber glass-based construction
- · Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size, 240 lbs per square
- · Lifetime limited transferable warranty residential\*
- · 50-year limited transferable warranty group-owned or commercial\*
- 15-year StreakFighter<sup>™</sup> warranty
- . 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version available (select colors\*\*)
- \* See warranty for specific details and limitations.

#### Fire Resistance:

- UL Certified to meet ASTM D3018, Type 1
- UL 790 Class A Fire Resistance
- · ASTM E 108 Class A Fire Resistance

#### Wind Resistance:

- UL 2390/ASTM D 6381 Class H Wind Resistance
- ASTM D3161, Class F 110 mph Wind Resistance

#### **Impact Resistance:**

 Highland Slate IR is UL2218, Class 4 Impact Resistance (select colors only)

#### Tear Resistance:

- UL Certified to meet ASTM D3462
- · CSA Standard A123.5

#### Wind Driven Rain Resistance:

Miami-Dade Product Control Acceptance

#### **Quality Standards:**

· ICC-ES-ESR-1389































# MDEPENDENCE"

- One full-size, fiber glass base shingle with randomly applied tabs
- · Deep shadow lines and random tabs create a distinct dimensional look
- · 250 lbs. per square
- · Lifetime limited transferable warranty residential\*
- 50-year limited transferable warranty group-owned or commercial\*
- . 15-year StreakFighter™ warranty
- . 10-year SureStart™ protection
- · 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
   CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- · UL certified to meet ASTM D3018 Type 1
- · ASTM D3161 wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### **Impact Resistance:**

UL2218 Class 1



# Hatteras

- Oversized extra-heavy fiber glass mat with dual stripes of CertaSeal™ Plus advanced modified sealant
- · Deep shadow lines create look of natural slate
- · 235 lbs. per square
- · Lifetime limited transferable warranty\*
- . 10-year StreakFighter™ warranty
- 10-year SureStart™ protection
- · 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
   CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- · ASTM D3161, Class F, 110 mph wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- · CSA standard A123.5

#### Wind Driven Rain Resistance:

· Miami-Dade Product Control Acceptance

#### **Quality Standards:**

• ICC-ES-ESR-1389















#### TRADITIONAL SHINGLES



In addition to a full contingent of luxury and designer shingles (architectural shingles), CertainTeed features the industry's broadest line of traditional shingles (3-tab shingles).

They're all designed for long-lasting performance and durability.

#### CT 20

- Fiber glass composition
- 195 lbs. per square
- 20-year limited transferable warranty\*\*
- 3-year SureStart™ protection
- 5-year 60 mph wind-resistance warranty
- \*\* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### Wind Driven Rain Resistance:

· Miami-Dade Product Control Acceptance

#### **Quality Standards:**

· ICC-ES-ESR-1389

Cedar Brown Dove Gray Moire Black Weathered Wood

#### CertainTeed ETRIA TOVEH 25

- Fiber glass composition
- 205 lbs. per square
- · 25-year limited transferable warranty\*\*
- 10-year StreakFighter™ warranty
- 5-year SureStart™ protection
- 5-year 60 mph wind-resistance
- \*\* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- · ASTM D3161 wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### Wind Driven Rain Resistance:

Miami-Dade Product Control Acceptance

#### **Quality Standards:**

· ICC-ES-ESR-1389

Black Cedar Brown Cinnamon Frost Dove Gray Evergreen Blend Heather Blend Mint Frost Moire Black Nickel Gray Oakwood Silver Lining Slate Gray Star White Tile Red Blend Timber Blend Weathered Wood

#### CertainTeed EXTRA TOUGH 30

- · Fiber glass composition
- · 215 lbs. per square
- 30-year limited transferable warranty\*\*
- . 10-year StreakFighter™ warranty
- 5-year SureStart™ protection
- 5-year 70 mph wind-resistance warranty
- · Impact Resistant version available (select colors)
- \*\* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- · UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- · ASTM D3161 wind resistance

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### Wind Driven Rain Resistance:

· Miami-Dade Product Control Acceptance

#### **Quality Standards:**

ICC-ES-ESR-1389

Black Cedar Brown Cinnamon Frost Dove Gray Moire Black Nickel Gray Oakwood Silver Lining Slate Gray Star White Timber Blend Weathered Wood

S E L E C		Shingle Construction and Description	Weight (lbs. per square)	UL Class A Fire Resistance Rating	UL Certified to Meet ASTM D3462	UL Certified to Meet ASTM D3018 Type 1	UL 2218 Impact Resistance Rating	ASTM D3161 Wind Resistance
Grand Manor		Two full-size, fiber glass base shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied	425	٧	~	~	Class 2	Class F, 110 mph
Carriage House	لتتتا	Two full-size, fiber glass base shingles; Unique chamfered cut for scalloped appearance; Four-layer coverage when applied	355	~	~	V	Class 1	Class F, 110 mph
Presidential Shake TL	tund	Three-piece laminated fiber glass construction; Distinctive sculpted, rustic look	480	~	>	~		Class F, 110 mph
Presidential Shake Impact Resistant Version Available		Two-piece laminated fiber glass base construction; Distinctive sculpted, rustic look	355	>	٧	~	Class 4	Class F, 110 mph
Presidential Solaris	hou	Three-piece laminated fiber glass base construction; Distinctive sculpted, rustic look	355	~	~	~		Class F, 110 mph
Landmark TL		Three-piece laminated fiber glass construction; Rustic appearance of hand-split wood shakes	305	~	~	~		Class F, 110 mph
COMPOSITE	SLATE							
Symphony	u.A.	A specially-engineered composite roofing shingle that mimics the look and feel of natural slate; Lighter and more durable than natural slate; exceptional UV fade-resistant surface technology	varies	V***			Class 4	90 mph
DESIGNER	SHINGLES							
Landmark Pro		Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	250	~	~	~		~
Landmark Premium		Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	300	~	>	~		V
Landmark Impact Resistant Version Available		Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	240 250	V	~	~	Class 4	~
Landmark		(1) 2 ·	200				Oldos 4	0
Solaris Impact Resistant Version Available		Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	250	V	V	~	Class 4	~
Solaris Impact Resistant		Two-piece laminated fiber glass base construction; Classic shades and	2000 0 P. N.	<i>v</i>	<i>y</i>	v		Class F,
Solaris Impact Resistant Version Available Highland Slate Impact Resistant Version Available		Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate  Single layer fiber glass base construction; Blended shades and dimensional appearance	250				Class 4	
Solaris Impact Resistant Version Available Highland Slate Impact Resistant Version Available (select colors)		Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate  Single layer fiber glass base construction; Blended shades and dimensional appearance of natural slate  One full-size, fiber glass base shingle with randomly applied tabs; Deep shadow lines and	250	~	~	~	Class 4	110 mph
Solaris Impact Resistant Version Available Highland Slate Impact Resistant Version Available (select colors) Independence	AL SHINGLE	Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate  Single layer fiber glass base construction; Blended shades and dimensional appearance of natural slate  One full-size, fiber glass base shingle with randomly applied tabs; Deep shadow lines and random tabs create a distinct dimensional look  Oversized extra-heavy fiber glass mat with dual stripes of CertaSeal Plus advanced modified sealant; Deep shadow lines create look of natural slate	250 240 250	v	v v	v	Class 4	110 mph
Solaris Impact Resistant Version Available Highland Slate Impact Resistant Version Available (select colors)  Independence  Hatteras	AL SHINGLE	Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate  Single layer fiber glass base construction; Blended shades and dimensional appearance of natural slate  One full-size, fiber glass base shingle with randomly applied tabs; Deep shadow lines and random tabs create a distinct dimensional look  Oversized extra-heavy fiber glass mat with dual stripes of CertaSeal Plus advanced modified sealant; Deep shadow lines create look of natural slate  Fiber glass composition; Designed for long-lasting performance and durability	250 240 250	v	v v	v	Class 4	110 mph
Solaris Impact Resistant Version Available Highland Slate Impact Resistant Version Available (select colors) Independence  Hatteras  TRADITION  XT 30 Impact Resistant Version Available	AL SHINGLE	Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate  Single layer fiber glass base construction; Blended shades and dimensional appearance of natural slate  One full-size, fiber glass base shingle with randomly applied tabs; Deep shadow lines and random tabs create a distinct dimensional look  Oversized extra-heavy fiber glass mat with dual stripes of CertaSeal Plus advanced modified sealant; Deep shadow lines create look of natural slate  Fiber glass composition; Designed for	250 240 250 235	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	v v	Class 4 Class 1	110 mph

\*\* Wind warranty upgr

	Miami-Dade Product Control Acceptance	Conforms To CSA Standard A123.5	Limited Transferable Warranty Against Manufacturing Defects On Residential Applications *50-Year on Group-owned or Commercial Applications	StreakFighter Warranty (where available)	SureStart Protection	Wind-Resistance Warranty Upgraded wind warranty available. See warranty for details and limitations	Shingle Size	Bundles Per Square
	٧	~	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
	~	~	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
	~	~	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	6
	~	~	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
	~	~	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
	~	~	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 40" 5 5/8" Exposure	4
			50-year		7-year	5-year 90 mph	18" x 6", 9" & 12"	varies
	~	V	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
	~	~	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	4
	~	>	Lifetime*	10-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
0	~							
		~	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
	~	~	Lifetime*		10-year 10-year	110 mph		3
		24		15-year	2	110 mph ** 15-year	5 5/8" Exposure 18" x 36"	
		~	Lifetime*	15-year 15-year	10-year	110 mph  **  15-year 110 mph  **  15-year 110 mph	5 5/8" Exposure 18" x 36" 8" Exposure 12" x 36"	3
	~	\ \ \	Lifetime*	15-year 15-year	10-year	110 mph  **  15-year 110 mph  **  15-year 110 mph  **	5 5/8" Exposure 18" x 36" 8" Exposure 12" x 36" 5" Exposure 18" x 36"	3
	~	\ \ \	Lifetime*	15-year 15-year	10-year	110 mph  **  15-year 110 mph  **  15-year 110 mph  **  5-year 70 mph	5 5/8" Exposure  18" x 36" 8" Exposure  12" x 36" 5" Exposure  18" x 36" 8" Exposure	3
	v	> >	Lifetime*  Lifetime*	15-year 15-year 10-year	10-year 10-year 10-year	110 mph  **  15-year 110 mph  **  15-year 110 mph  **  15-year 110 mph  **	5 5/8" Exposure  18" x 36" 8" Exposure  12" x 36" 5" Exposure  18" x 36" 8" Exposure	3 4 3

#### High-Performance Starter

Starter Course shingle specifically for use with Grand Manor, Highland Slate and Hatteras—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- · Provides labor and cost savings by not cutting shingles
- · Dual sealant strip for increased wind resistance
- · Better look with straight factory-cut eave edge

Required for Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle
- · Two layers of straight factory-cut eave edge
- · Available in the entire Presidential Shake TL and Presidential Shake color line
- · Assures Class A fire rating
- · Saves significant installation time

· Full line of hip and ridge accessories to complement and enhance the slate-inspired look of Symphony.

#### CertainTeed Swiftstart

CertainTeed Swiftstart metric starter shingle is designed specifically for use with CertainTeed Landmark™ Series shingles. Rather than cutting expensive field shingles to use as starters, you can save time and money by starting with Swiftstart.

- · Code-compliant, meets min. 2" headlap requirement for metric shingles; many competing products do not
- · Each 18-piece bundle covers 116 lineal ft.
- · Recommended for use to obtain enhanced warranties


- · CertainTeed Ridge Vent 12" unfiltered
- · CertainTeed Ridge Vent 12" filtered
- · CertainTeed Rolled Ridge Vent unfiltered
- · CertainTeed Intake Vent filtered

#### HIP AND RIDGE ACCESSORIES



#### Shangle® Ridge Accessory

- · Hip and ridge capping
- · Two full layers
- 12" width allows application over standard ridge vents
- · Full 8" exposure
- Matches all Grand Manor, Highland Slate and Carriage House colors
- · Algae resistant



#### **Shadow Ridge**

- · Used for hip and ridge capping
- Single-layer coverage for product versatility
- · Sealant strip for maximum adherence
- Dimensions are 12" x 12", with a 5" exposure
- Can be used on shingle-over vents or directly over centerline of hip or ridge
- Available in complementary product colors (see individual Roofing Plant Catalogs for color availability)



#### Solaris Hip and Ridge

- · Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal feet per bundle; 24 shingles per bundle



#### **Cedar Crest**

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- · Covers 20 lineal feet per bundle
- Matches Landmark Series, Landmark TL, Presidential Shake, Presidential Shake TL, Highland Slate and Hatteras colors



#### Symphony

- · Used for hip and ridge capping
- Matches Symphony colors

#### Integrity Roof System



A systems approach combines high-performance components – underlayments, shingles, accessory products and ventilation – to make the Integrity Roof System a complete roofing solution. When you choose an Integrity Roof System, you gain the advantage of having CertainTeed as your single manufacturing source to stand behind its roof system components.

#### WinterGuard1

Waterproofing shingle underlayment prevents leaks from wind-driven rain and ice dams in vulnerable areas.

#### Roofers' Select" or DiamondDeck'

High-performance underlayment provides a protective water-resistant layer over the roof deck and a secondary barrier against leaks.

#### Starter Shingles

Starter shingles are designed to work specifically with each different type of CertainTeed shingle for maximum performance.

#### CertainTeed Shingles

High-Quality shingles available in a wide variety of styles and colors, covered by the strongest warranty in the business. Flintlastic roll roofing products are also available for flat roof areas.

#### Hip & Ridge Caps

Accessory shingles are used to finish the hips and ridges of the roof and are designed to complement the appearance of CertainTeed shingles.

#### CertainTeed Ridge Vents

CertainTeed® Ridge Vents combined with sufficent intake vents, such as CertainTeed® Intake Vents, are the most effective ventilation system.

#### StreakFighter™ algae resistance protection

What is StreakFighter? It's a special feature that protects a wide range of CertainTeed shingles from the streaking, spotting and discoloration caused by airborne algae. StreakFighter helps safeguard a roof's beauty, especially in humid areas.

#### SureStart™ protection

Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart\* protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period, CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor to repair the defective shingles or apply new shingles to replace the defective shingles. See actual warranty for details and limitations.

#### Roofers' Select™

This revolutionary high-performance underlayment combines new technology with the best attributes of true 15 and 30 lb. felt.


- · Lays flat and is extremely resistant to wrinkling
- Reduces the likelihood of slipping for increased safety
- Doesn't tear away from fasteners when walked on or in strong wind
- Meets underlayment requirements for the CertainTeed Integrity Roof System™

#### DiamondDeck™

DiamondDeck™ is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.

#### WinterGuard™







WinterGuard is installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

WinterGuard Sand and WinterGuard Granular are designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and is the only WinterGuard product to be warranted for use under metal roofs. WinterGuard is most commonly used in critical areas such as roof eaves, valleys and low-slope applications.


WinterGuard is classified by Underwriters Laboratories (UL) to be a suitable underlayment for use in any UL Class A, B or C fire rated shingle system, and it is manufactured to meet ASTM D1970.

For specific details and limitations, refer to the actual product warranties.

#### MetaLayment™ Self-Adhering Metal Underlayment

MetaLayment™ has a tough, tear-resistant film on its top surface that will not scratch roofing metal applied over it. The adhesive bottom surface of MetaLayment is protected with a disposable silicone-coated release film, which is split longitudinally down the middle for easier application. Manufactured to meet ASTM D1970.



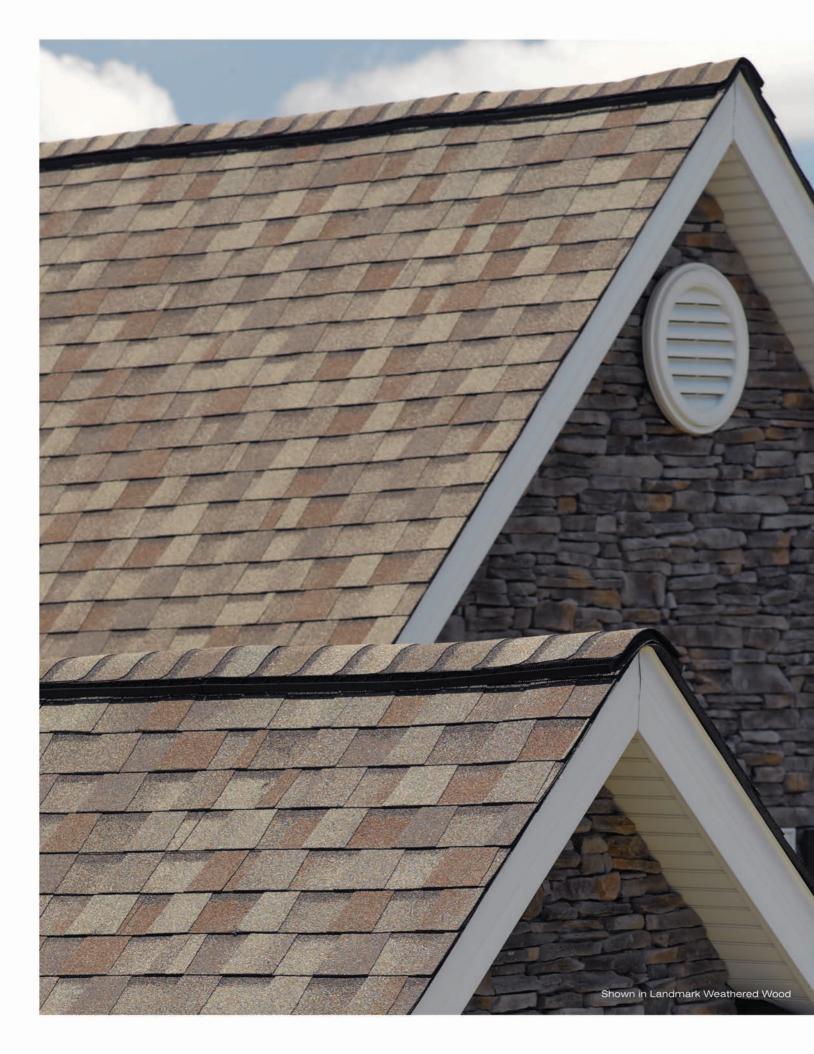



# easy selection

#### Color Companion Products™

With CertainTeed Flintlastic® SA, you can coordinate flat roof areas like carports, canopies and porches with your main roof. Flintlastic SA is a self-adhering low slope roofing product available in eight colors that match some of the most popular CertainTeed shingles. Ask your contractor for more information.

RATED BY BUILDING & REMODELING & PROFESSIONALS

### What's behind our #1 rating?

Builders and remodelers across America know certain things to be true of CertainTeed. For starters, we've been in the roofing business for over 100 years. We have thousands of satisfied homeowners. The process of building that satisfaction begins the moment you turn to us.

CertainTeed offers you the broadest range of color and style choices. But you'll see it's not style over substance. You'll get a roof that's made from the highest quality materials and backed by a strong warranty program. It's our promise to you: quality made certain, satisfaction guaranteed.

NOTE: Due to limitations of printing reproduction, CertainTeed can not guarantee the identical match of the actual product color to the graphic representations throughout this publication.



Your home is a reflection of your lifestyle.

From the way your furniture complements your wall colors to the way your roofline interacts with the landscaping.



What does your home say about you?

















Products available in areas shown



#### Reaching for the ENERGY STARS.

As a 2013 ENERGY STAR Sustained Excellence recipient for Energy Management, we are proud of our commitment to designing high quality, sustainable roofing products.

ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • FOUNDATIONS GYPSUM • CEILINGS • INSULATION • PIPE

www.certainteed.com

http://blog.certainteed.com

CertainTeed Corporation P.O. Box 860 Valley Forge, PA 19482

Professional: 800-233-8990 Consumer: 800-782-8777

© 11/13 CertainTeed Corporation, Printed in U.S.A.
Code No. 20-20-1703

