

Vehicle Antennas

• JEBSEE •

AN92 I I

AM/FM/DAB/GPS LI


Roof-Mounted AM / FM / DAB /GPS Antenna



Features

- The base includes a built-in AM/FM/DAB amplifier and a GPS active antenna
- Fixed-angle rod antenna
- High-quality reception
- The cable length, type, and connector can all be customized

AN92 I I DIMENSIONS

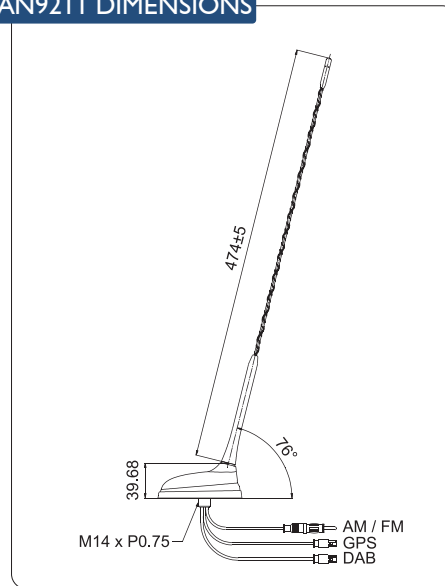

Model No.		AN92 I I			
Item		AM	FM	DAB Band III	GPS LI
Frequency Range	MHz	0.535 – 1.705	88 – 108	174 – 240	1575.42 ± 1.023
Gain (w/o cable)	dB	–	6 – 10	15 max.	26 – 28
Noise Figure	dB	–	3.5 max.	2.0 max.	2.0 max.
Output VSWR	:1	3.5 max.	2.5 max.	2.5 max.	2.0 max.
Output Impedance	Ohm	75		50	50
Current Consumption	mA	60 – 75 @ 14VDC		32 – 42 @ 14VDC	15 max. @ 3 – 5.5VDC
		Mechanical			
Cable		I.5C-2V, 565mm		RG-174/U, 280mm	RG-174/U, 245mm
Connector		JASO male		FARKA female (code A)	FARKA female (code C)
Mounting		Screw			
IP Rating		IPX7			