

FLEXIBLE, SECURE AND SUSTAINABLE A4 BLACK AND WHITE MULTIFUNCTION DEVICES.

Ideal for large offices and workgroups with high-volume printing and scanning needs

imageFORCE 710 Series



BOOST PRODUCTIVITY

Produce a range of output at print speeds of up to 71ppm and scan speeds of 190ipm. Print on small paper sizes, save time with a fast warm up time and enable multiple users to print large documents thanks to additional paper capacity options.

ROBUST SECURITY

Protect documents, devices and your network with multifactor authentication, network encryption and runtime intrusion detection. A security settings navigator recommends appropriate settings to protect against information leaks and cyber threats.

SUSTAINABLE


Boost your sustainability efforts with devices that are built with up to 25% recycled plastic, use recyclable cardboard packaging and have a low energy consumption.

USER EXPERIENCE

Easily carry out print and scanning jobs using the intuitive user interface. Quickly reach the most relevant part of the online manual via a QR code and benefit from high contrast design improvements making it easier to use by people with visual impairment.

imageFORCE 710 Series

MAIN CONFIGURATION OPTIONS

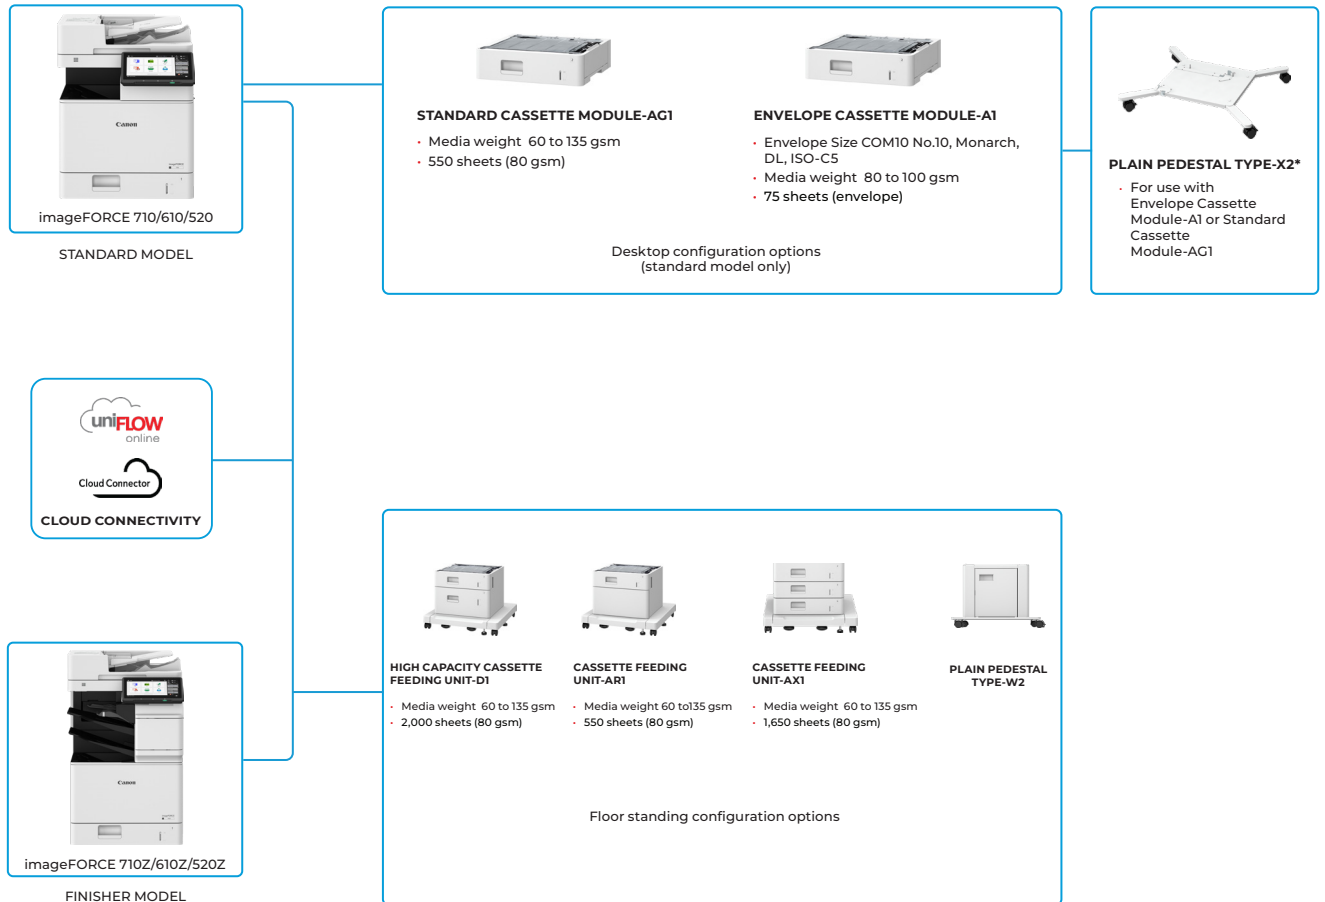

*Paper supply options include up to three additional cassettes for non finisher models and up to two additional cassettes for finisher models (Z series)

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

TECHNICAL SPECIFICATIONS

imageFORCE 710 Series

MAIN UNIT	
Machine Type	A4 Monochrome Laser Multifunctional
Core Functions	Print, Copy, Scan, Send, Store and optional Fax
Processor	1.8GHz Dual Core Processor
Control Panel	10.1" TFT LCD WSVGA Color Touch panel
Memory	RAM: 4.5GB
Storage	Standard: (SSD) 256GB
Interface Connection	Network Standard: 1000Base-T/100Base-TX/10Base-T, Optional: Wi-Fi(IEEE 802.11a/b/g/n/ac/ax) Others Standard: USB 2.0 x 1 (Host), USB 3.0 x 1 (Host), USB 2.0 x 1 (Device) Optional: Serial Interface, Copy Control Interface
Paper Supply Capacity (A4, 80gsm)	Standard: 650 sheets 100-sheets Multi-purpose tray 550-sheets Paper cassette x 1 Maximum: 3,200sheets (with High Capacity Cassette Feeding Unit-D1)
Paper Output Capacity (A4, 80gsm)	Standard model (imageFORCE 710/610/520): 500 sheets Finisher model (imageFORCE 710Z/610Z/520Z): 1,000 sheets
Finishing Capabilities	Standard model (imageFORCE 710/610/520): Collate, Group Finisher Model (imageFORCE 710Z/610Z/520Z): Collate, Group, Offset*, Staple* *available with upper tray
Supported Media Types	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Letterhead,Envelope Paper Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Label, Pre-Punched, Letterhead
Supported Media Sizes	Multi-purpose tray: Standard size: A4, A5, A5R, A6, B5 Custom size: 76.2 x 127.0 mm to 216.0 x 355.6 mm Envelope: COM10 No.10, Monarch, DL, ISO-C5 Paper Cassette: Standard size: A4, A5, A5R, A6, B5 Custom size: 99.0 x 148.0 mm to 216.0 x 297.0 mm
Supported Media Weights	Multi-purpose tray: 60 to 200 gsm Paper Cassette: 60 to 135 gsm Duplex: 60 to 120 gsm

Warm-up Time	Quick Startup Mode: 4 seconds or less* *Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Power On: 10 Seconds or Less* *Time from device power on, until copy ready (not print reservation) From Sleep Mode: 10 Seconds or less
Dimensions (W x D x H)	Standard model (imageFORCE 710/610/520): 500 x 598 x 617 mm Finisher model (imageFORCE 710Z/610Z/520Z): 502 x 598 x 814 mm
Installation Space (W x D)	Standard model/ Finisher model: 1,052 x 823 mm (with left CRG door open + right door open + the cassette drawer open)
Weight	Standard model (imageFORCE 710/610/520): Approx. 36kg including toner Finisher model (imageFORCE 710Z/610Z/520Z): Approx. 45kg including toner

PRINT SPECIFICATIONS	
Print Speed*	imageFORCE 710/710Z: Up to 71 ppm (A4), Up to 113 ppm (A5), Up to 40 ppm (A5R, A6) imageFORCE 610/610Z: Up to 61 ppm (A4), Up to 99 ppm (A5), Up to 35 ppm (A5R, A6) imageFORCE 520/520Z: Up to 52 ppm (A4), Up to 80 ppm (A5), Up to 35 ppm (A5R, A6) *1-sided
Print Resolution (dpi)	Up to 1,200 x 1,200
Page Description Languages	Standard: UFR II, PCL6/PCL5, Adobe® PostScript®3™
Direct Print	Supported file types: PDF, EPS, TIFF/JPEG, and XPS
Printing From Mobile And Cloud	AirPrint, Mopria, IPP Everywhere, Canon PRINT, uniFLOW Online, Universal Print and Cloud Connector A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information

TECHNICAL SPECIFICATIONS

imageFORCE 710 Series

OS Standard Printing	Android/Windows® 10/Windows® 11/ Chrome OS/macOS (11.2.2 or later) /iOS (15.2 or later)/iPadOS
Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T* ¹ (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts* ² * ¹ Optional PCL International Font Set-A1 is required. * ² Optional Barcode Printing Kit-D1 is required.
Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two- sided Printing, Mixed Paper Sizes/ Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Operating System	UFR II: Windows® 10/11/Server2016/ Server2019/Server2022/Server2025, macOS (10.14 or later) PCL: Windows® 10/11/Server2016/ Server2019/Server2022/Server2025 PS: Windows® 10/11/Server2016/ Server2019/Server2022/Server2025, macOS (10.14 or later) PPD: Windows® 10/11, macOS (10.15 or later)

COPY SPECIFICATIONS

Copy Speed*	imageFORCE 710/710Z: Up to 71 ppm (A4), Up to 113 ppm (A5), Up to 40 ppm (A5R, A6) imageFORCE 610/610Z: Up to 61 ppm (A4), Up to 99 ppm (A5), Up to 35 ppm (A5R, A6) imageFORCE 520/520Z: Up to 52 ppm (A4), Up to 80 ppm (A5), Up to 35 ppm (A5R, A6) * 1-sided
First-Copy-Out Time (A4)	Approx. 5 seconds or less
Copy Resolution (dpi)	600 x 600
Multiple Copies	Up to 9,999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	Variable zoom: 25% to 400% (1% Increments)

Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Two-sided Original, Job Build, N on 1, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Copy ID Card, Skip Blank Pages, Reserved copy, Copy Sample
----------------------	--

SCAN SPECIFICATIONS

Type	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] *Multi-Sheet Feed Detection is supported.
Document Feeder Paper Capacity (80 gsm)	up to 100 Sheets
Document Feeder Acceptable Paper Weight	Document Feeder media weight: 1-sided scanning: 42 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL) Note: Business card: 80 to 220 gsm Original width narrower than A6: 50 to 128 gsm Long Original(over than 355.6mm): 60 to 90gsm
Supported Media Sizes	Platen scanning size: up to 216.0 x 355.6 mm Document Feeder media size: A4, A5R, A6, B5, Custom size: 48.0 x 128.0 mm to 216.0 x 355.6 mm Business card: 48.0 x 85.0 mm to 55.0 x 91.0 mm
Scan Speed (ipm: A4)	Send (300 x 300 dpi): Automatic Color Select "OFF": 1-sided Scanning: 95 2-sided Scanning: 190 Automatic Color Select "ON": 1-sided Scanning: 50 2-sided Scanning: 100 Copy (600 x 600 dpi): 1-sided Scanning: 95 2-sided Scanning: 140
Scan Resolution (dpi)	600 X 600
Pull Scan Specifications	Color Network ScanGear2 for both TWAIN and WIA Supported OS: Windows® 10/11/Server 2016/Server 2019/Server 2022/Server 2025

TECHNICAL SPECIFICATIONS

imageFORCE 710 Series

Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud(uniFLOW Online) Scan to cloud* (uniFLOW Online & Cloud Connector) *optional
--------------------	---

SEND SPECIFICATIONS

Destination	Standard: E-mail/Internet FAX (SMTP*), SMB 3.0, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax * Available OAuth 2.0 authentication method on Microsoft 365 and Google Workspace
Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)
Communication Protocol	File: FTP(TCP/IP), SMB3.1.1 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3
File Format	TIFF, JPEG, PDF (Compact, Searchable, Optimize for Web, PDF A/1-b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
Universal Send Features	Original Type Selection, Two-sided Original, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals

FAX SPECIFICATIONS

Maximum Number Of Connection Lines	1
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (Dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending/Receiving Size	Sending: A4, A5R*, A6*, B5* Receiving: A4, A5*, A5R, B5 *Sent as A4
Fax Memory	Up to 30,000 pages (2,000 jobs)
Speed Dials	Max. 200

Group Dials/Destinations	Max. 199 dials
Sequential Broadcast	Max. 256 addresses
Memory Backup	Yes
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

STORE SPECIFICATIONS

Mail Box (Number supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 30,000 Pages (2,000 jobs) Stored
Advanced Space	Communication Protocol: SMB or WebDAV Supported Client PC: Windows®10/11 Concurrent Connections (Max.): SMB:64, WebDAV:3
Advanced Space Available Disc Space	Standard: 16 GB
Advanced Space Features	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

SECURITY SPECIFICATIONS

Authentication And Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login*, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online** (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Cloud Connector** (PIN Login), Microsoft Entra ID (PIN Login, Card Login), Two-Factor Authentication at LUI/RUI, Access Management System (Access Control) *Card readers are optional, please refer to Hardware Accessories **Subscription required
--	---

TECHNICAL SPECIFICATIONS

imageFORCE 710 Series

Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print*), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Secure Watermark *Optional
Network Security	TLS 1.3 (FIPS140-3), IPSec (FIPS140-3), IEEE802.1X authentication, SNMPv3, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), WPA3 support (Wi-Fi), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Space in the MFP, Scan and Send -Virus Concerns for E-mail Reception
Device Security	Protecting SSD Data [SSD Data Encryption (FIPS140-3), SSD Lock], Standard SSD Initialize, Initialize (NIST 800-88 PURGE LEVEL), Trusted Platform Module (TPM 2.0), Job Log Conceal Function, Protecting MFP Software Integrity: Verify System at Startup (NIST SP800-193: Protection), Checking MFP Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery), Runtime Intrusion Detection: Trellix Embedded Control, HCD-PP Common Criteria Certification (Pending Confirmation)
Device Management And Auditing	Administrator Password, Digital Certificate And Key Management, SAN certificates, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting
ENVIRONMENTAL SPECIFICATIONS	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
Power Source	220-240 V, 50/60 Hz, 4.8 A

Power Consumption	Maximum: Approx. 1,500 W Copy mode (ADF continuation copying): 834.29W* ¹ Standby: Approx 32.40 W* ¹ Sleep mode: Approx. 0.36 W* ² * ¹ Reference value: measured one unit * ² 0.36 W is not available in all circumstances due to certain settings Typical Electricity Consumption (TEC)* rating imageFORCE 710/710Z: 0.73 kWh imageFORCE 610/610Z: 0.59 kWh imageFORCE 520/520Z: 0.49 kWh *ENERGY STAR (US scheme), Eligibility Criteria Version 3.2 for Imaging Equipment
Noise Levels	Sound Power Level (LWA, m)* Active (I-sided) imageFORCE 710Z/710: 70/69 dB, Kv 3/3 dB imageFORCE 610Z/610: 68/68 dB, Kv 3/3 dB imageFORCE 520Z/520: 68/67 dB, Kv 3/3 dB Sound Pressure (LpAm)* Bystander's position: Active(BW) (I-sided): imageFORCE 710Z/710: 56/56 dB imageFORCE 610Z/610: 55/54 dB imageFORCE 520Z/520: 54/54 dB Stand-by imageFORCE 710Z/610Z/520Z: 25dB* imageFORCE 710/610/520: 21dB* *Reference value: Measured only one unit with ISO7779, described with ISO9296 (2017)
Standards	Blue Angel (Validation Pending)
CONSUMABLES	
Toner Cartridges	T03 Black
Toner Yield (Estimated @5% Coverage)	51,500 pages Toner Cartridge yield in accordance with ISO/IEC 19752.
SOFTWARE AND PRINTER MANAGEMENT	
Tracking and Reporting	uniFLOW Online (optional)
Remote Management Tools	iW Enterprise Management Console, Remote Distribution & Management Service, Monitoring Service
Scanning Software	Color Network ScanGear 2
Optimisation Tools	Canon Driver Configuration Tool
Platform	MEAP (Multifunctional Embedded Application Platform)

TECHNICAL SPECIFICATIONS

imageFORCE 710 Series

PAPER SUPPLY OPTIONS	
Cassette Module-AG1	Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Label, Bond, Pre-punched, Letterhead Paper Size: A4, A5, A5R, A6, B5, Custom size: 99.0 x 148.0 mm to 216.0 x 355.6 mm Paper Weight: 60 to 135 gsm
Envelope Cassette Module-A1	Paper Capacity: 75 sheets (Envelope) Envelope Size: COM10 No.10, Monarch, DL, ISO-C5 Paper Weight: 80 to 100 gsm
Cassette Feeding Unit-AR1	Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Label, Bond, Pre-punched, Letterhead Paper Size: A4, A5, A5R, A6, B5, Custom size: 99.0 x 148.0 mm to 216.0 x 355.6 mm Paper Weight: 60 to 135 gsm
High Capacity Cassette Feeding Unit-D1	Upper cassette: Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Label, Bond, Pre-punched, Letterhead Paper Size: A4, A5, A5R, A6, B5, Custom size: 99.0 x 148.0 mm to 216.0 x 355.6 mm Paper Weight: 60 to 135 gsm Lower cassette: Paper Capacity: 2,000sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Bond, Pre-punched Paper Size: A4 Paper Weight: 60 to 135 gsm
Cassette Feeding Unit-AX1	Paper Capacity: First Cassette 550 sheets (80gsm) 2nd cassette 550 sheets (80gsm) 3rd cassette 550 sheets (80gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Label, Bond, Pre-punched, Letterhead Paper Size: A4, A5, A5R, A6, B5, Custom size: 99.0 x 148.0 mm to 216.0 x 355.6 mm Paper Weight: 60 to 135 gsm

ADDITIONAL OUTPUT FEATURES*	
Inner Finisher (only Finisher Model)	Tray Capacity (with 80 gsm paper, same paper type): Upper Tray: A4, A5R, B5: 400 sheets Lower Tray: A4, A5R, B5: 100 sheets Main unit output tray: A4, A5, A5R, A6, B5: 500 sheets Paper Weight: 60 to 163 gsm Staple Position: Corner Staple Capacity: 30 sheets (60 to 90 gsm), 20 sheets (91 to 120 gsm) *Paper capacity may vary with different paper type/size.
HARDWARE ACCESSORIES	
Card Readers: IC Card Reader Box-D2	Various card readers available e.g. MiCard Plus. Please contact local Canon Office for more details.
SYSTEM AND CONTROLLER OPTIONS	
Print Accessories	PCL International Font Set-A1
Barcode Printing	Barcode Printing Kit-D1
System Accessories	Copy Control Interface Kit-A1 Wireless LAN Board-D1
FAX Accessories	Super G3 FAX Board-BM1 Remote Fax Kit-A1 IP FAX Expansion Kit-B1
OTHER OPTIONS	
Accessibility Accessories	ADF Access Handle-A1
Consumables	Staple-P1

imageFORCE 710 Series



Certifications and compatibility



Canon UK Ltd.
4 Roundwood
Avenue
Stockley Park
Uxbridge
UB11 1AF
canon.co.uk

Canon Ireland Ltd.
3090 Lake Drive
Citywest Business Campus
Saggart, Co. Dublin
D24 XN47
canon.ie