


MIC-D2106-OF

21.5" Military LCD Monitor Open Frame

Features

- 21.5" LCD Size
- 1920 x 1080 Resolution
- 1000 nits Brightness (After Bonding)
- -20 to + 60°C Operating Temperature
- EMI Mesh, Optical Bonding
- D38999 Types Connectors for Interfaces
- Open Frame Design

Appearance

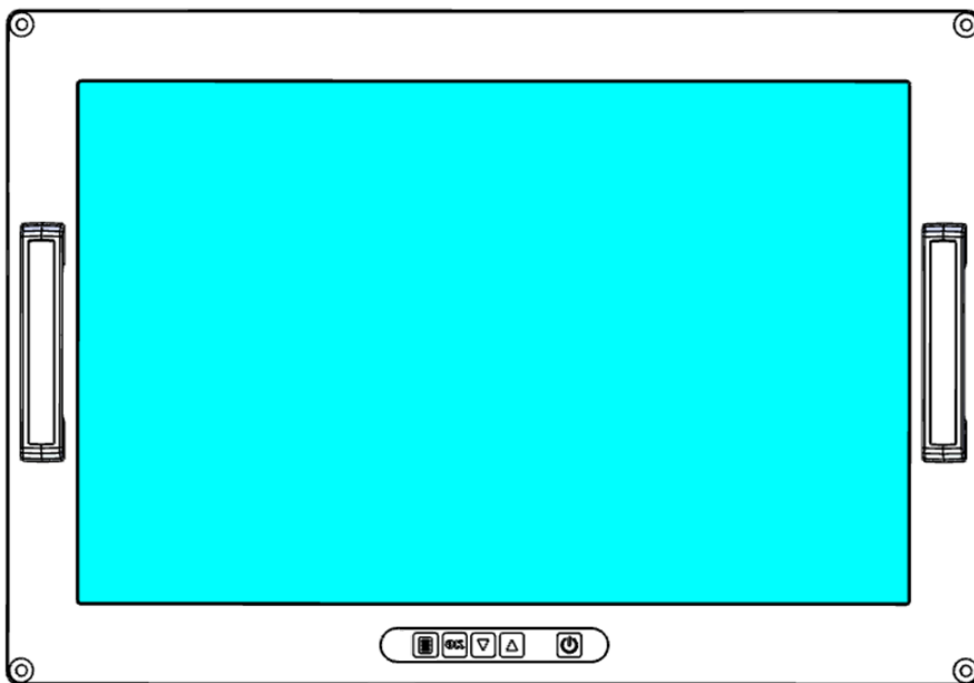



MIC-D2106-OF

21.5” Military LCD Monitor Open Frame

Revision Table

Date	Revision	Content	By
2025/4/2	0.1	First Draft	Dennis

MIC-D2106-OF

21.5" Military LCD Monitor Open Frame

Specification

LCD Panel	
LCD Size	21.5" TFT LCD
Backlight	LED
Resolution	1920 x 1080
No. of Colours	16.7M
View Angle	$\pm 89^{\circ}$ (H), $\pm 89^{\circ}$ (V)
Luminance	300 nits (After Bonding)
Contrast Ratio	1000:1
Pixel Pitch	0.24795 x 0.24795mm
Aspect Ratio	16:9
LCD Panel Life time	50,000 Hrs.
Interface	LVDS
Response Time	15ms (Tr+Tf)
Active Area	476.064(W) x 267.786(H) mm
Touch Glass	
EMI Mesh	Yes
Optical Bonding	Yes
Cover Glass	Strengthen Glass
Glass Surface Hardness	$\geq 5H$

MIC-D2106-OF

21.5" Military LCD Monitor Open Frame

Specification

Interfaces	
Power Input	1x 12VDC Input Connector: D38999/20WA98PN Cap: D38999/33W9N
Input Sources	2x HDMI 1x DVI 1x VGA
OSD Keypad	Membrane Type
OSD Keys:	Multi Language OSD Menu; Buttons: Power ON/OFF, Menu, Exit, Up, Down
Mechanical	
Material	Aluminium Alloy
Design	Open Frame with Front Handle
Dimension	Approx. 566 x 362 x 50mm

Environment Compliance

Operating Temp.	-20°C to +60°C
Storage Temp.	-30°C to +80°C
Humidity	Ta≤40°C, 90%RH, Non-Condensing
Shock	Design to meet MIL-STD-810G
Vibration	Design to meet MIL-STD-810G
EMI/EMC	Design to meet MIL-STD461E/F

Environmental performance may vary according to the integration method or final integration scenario.


MIC-D2106-OF

21.5" Military LCD Monitor Open Frame

Deliverables

1	21.5" Capacitive Touch Military LCD Monitor Open Frame
2	External Cables (Optional – To Be Customized)

Reference Drawings

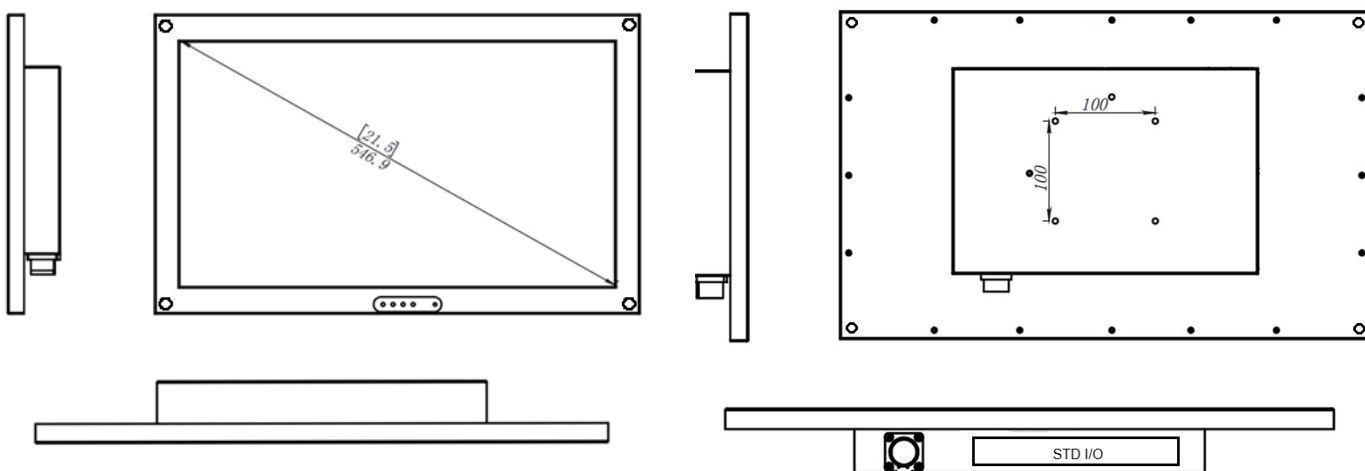

Ordering Information

Model Name	Description	Unit
MIC-D2106-OF	21.5" Military LCD Monitor Open Frame	1

Disclaimer

This datasheet is for informational purposes only and does not constitute professional advice, a contractual obligation, or a guarantee of any kind. While efforts have been made to ensure accuracy, ACT POWER TAIWAN makes no representations or warranties, express or implied, regarding its completeness or reliability. ACT POWER TAIWAN reserves the right to update, modify, or withdraw this document at any time without prior notice. Users should verify the suitability of the product for their specific application through independent testing and validation. ACT POWER TAIWAN shall not be liable for any direct, indirect, or consequential damages arising from the use of this document. This document is governed by the laws of Taiwan, and any disputes shall be subject to the exclusive jurisdiction of the Taiwan courts.