

A182-F316

150LB GATE VALVE
150磅级 锻钢闸阀

APPLICABLE STANDARDS

适用标准

BASIC DESIGN: API 602

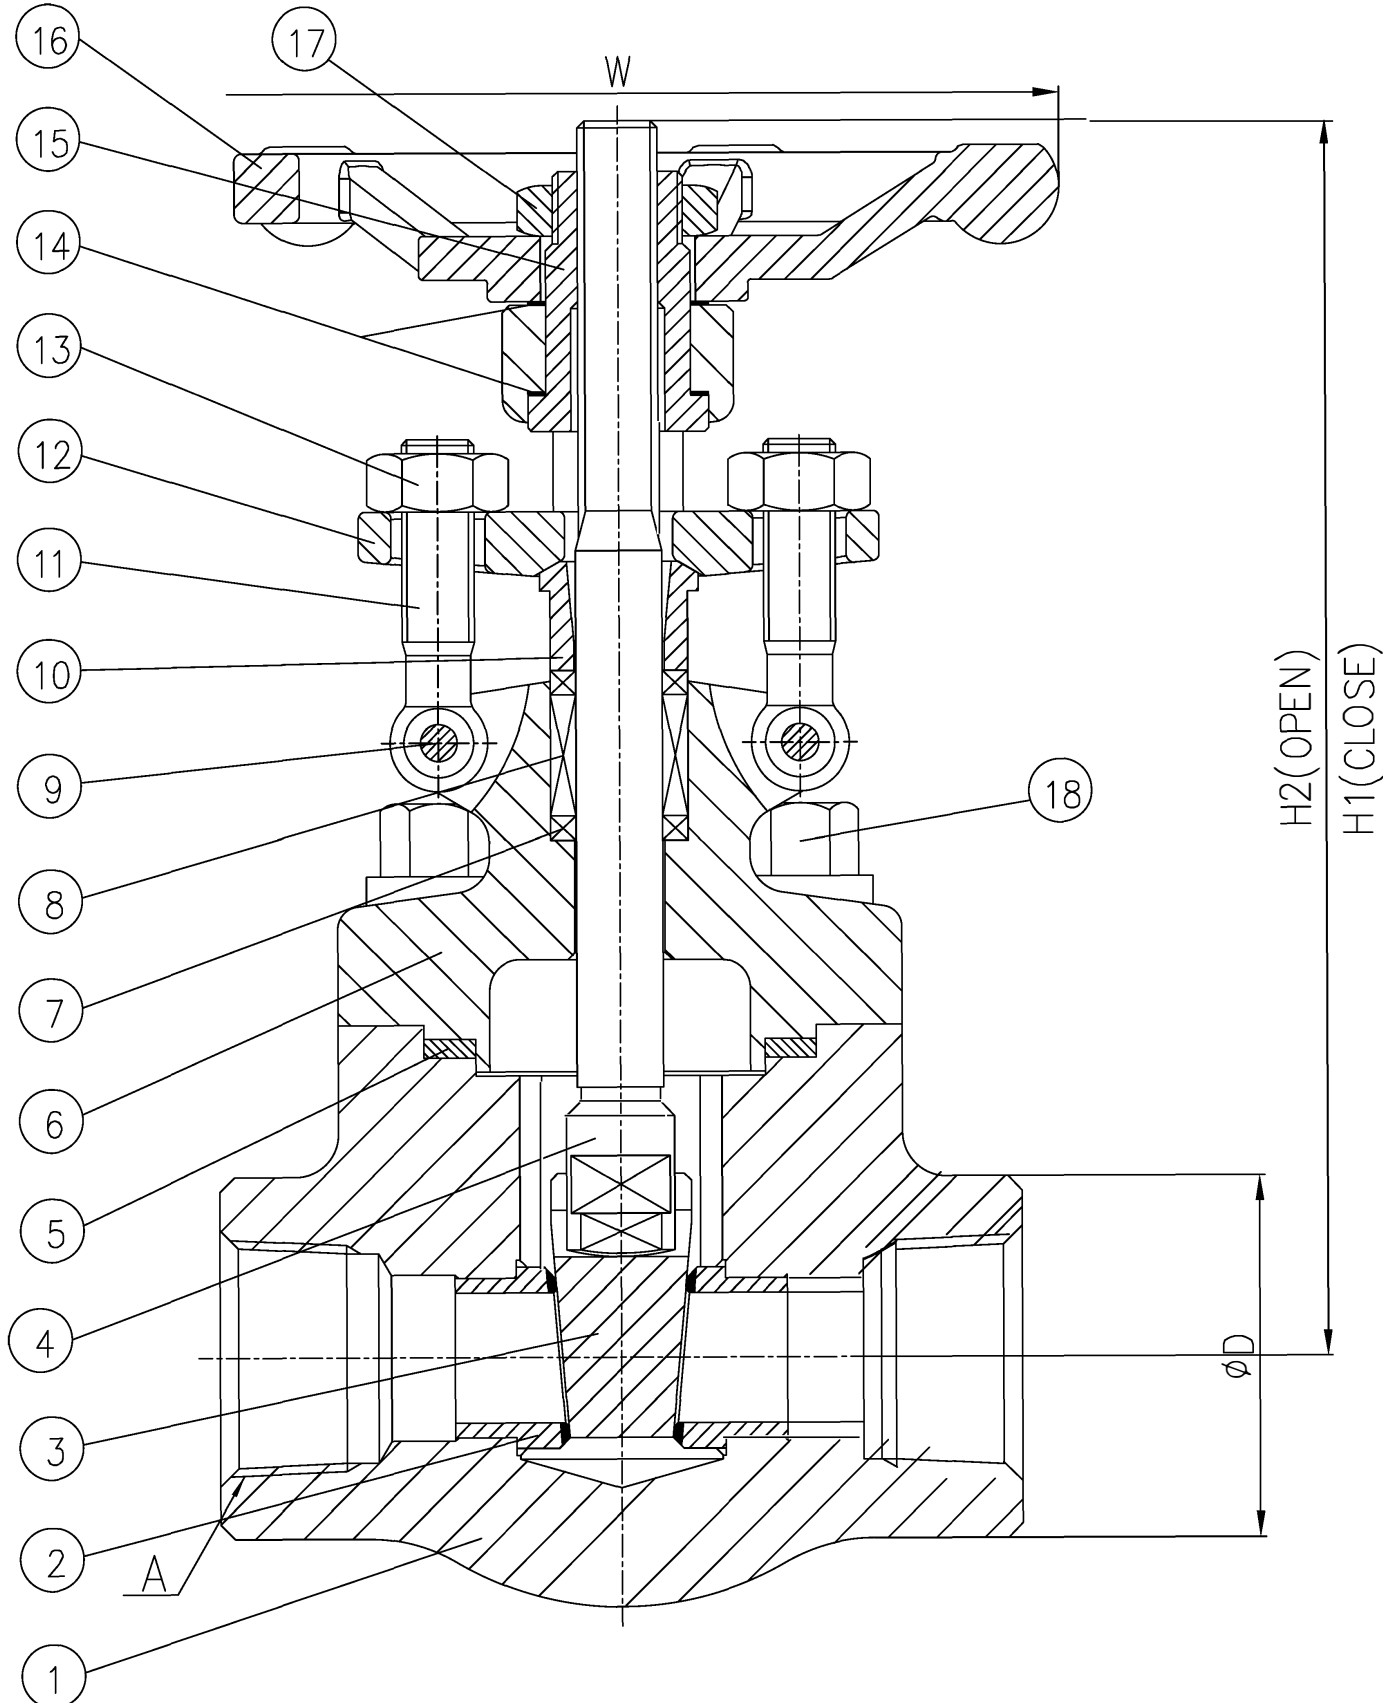
基本设计 API 602

SCREWED END: DIN259(BSP)

内螺纹连接端 DIN259(BSP)

TEST AND INSPECTION: API598

阀门试验和检验 API598

[illegible]

TEST ITEM 试验项目	TEST PRESSURE(MPa) 试验压力 (MPa)
SHELL TEST 强度试验	3.0
BACK SEAT TEST 上密封试验	2.2
HIGH PRESSURE TEST 高压密封试验	2.2
LOW PRESSURE TEST AIR SEAL 低压密封试验	0.6

18	BOLT	4	A193-B8
17	HW NUT	1	A194-8
16	HANDWHEEL	1	A197
15	STEM NUT	1	A276-410
14	GASKET	2	A276-410
13	EYEBOLT NUT	2	A194-8
12	GLAND FLANGE	1	F304
11	EYEBOLT	2	A193-B8
10	GLAND	1	A276-304
9	PIN	2	A276-410
8	PACKING	Set	FLEX GRA
7	PACKING	2	FLEX GRAE+SPW
6	BONNET	1	F304
5	GASKET	1	SPISPW+ 304SS
4	STEM	1	F304
3	WEDGE	1	F304
2	SEAT	2	F304
1	BODY	1	F304
序号 Serial No	零部件名称 Part Name	数量 Qty	零部件材料 Material

