

# IJ-FE19

## 1-Port 10/100M Midspan Injector 19w



### Product Overview

IJ-FE19 is a single port, PoE PSE solution for remote PoE PD devices. Generating up to 15.4W, IJ-FE19 supplies remote power for new applications such as wireless Access Points, pan-tilt- zoom (PTZ) IP cameras and video-phones. It complies to IEEE 802.3at PoE standard and backward compatible to IEEE802.3af. It can work with 10/100Base-T networking devices and emerging 1000Base-T devices such as Wi-MAX and wireless IEEE 802.11n access points.


### Key Features

- IEEE 802.3at/af Power over Ethernet (PoE) standard
- 1-Port 10/100Mbps Ethernet
- Provides up to 15.4 watts for PoE

## Specifications

No. of PoE PSE Ports	1 ports FE Auto-MDIX in , 1 port PoE out
Pass Through Data Rates	10/100Mbps
Pin Assignment and Polarity	4/5(+),7/8(-)
Output Power Voltage	52 VDC Maximal
User Port Power	19 Watts Maximal
Input Power AC Input Voltage	100 ~ 240 VAC
Requirements AC Input Current	0.8A @ 100-240 VAC
AC Frequency	50 to 60 Hz
Dimensions	166 x 87.9 x 51.3 mm
Weight	350g
Indicators	System Indicator: AC Power (Green)
Connectors	RJ-45
Operating Ambient Temperature	0 to 50 °C
Regulatory	RoHS Compliant, CE
Safety Approvals	EN 60950:2006

## Dimensions

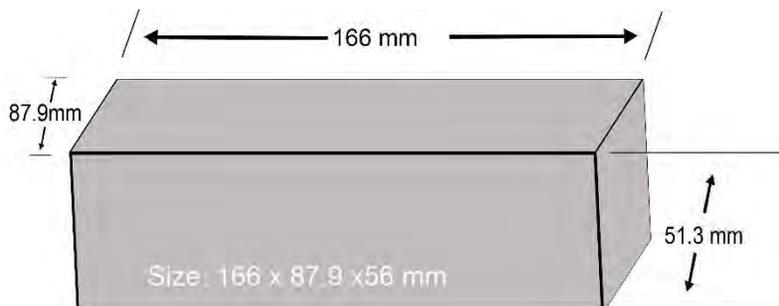

## Panel

Front Panel



Rear Panel



## Application

