
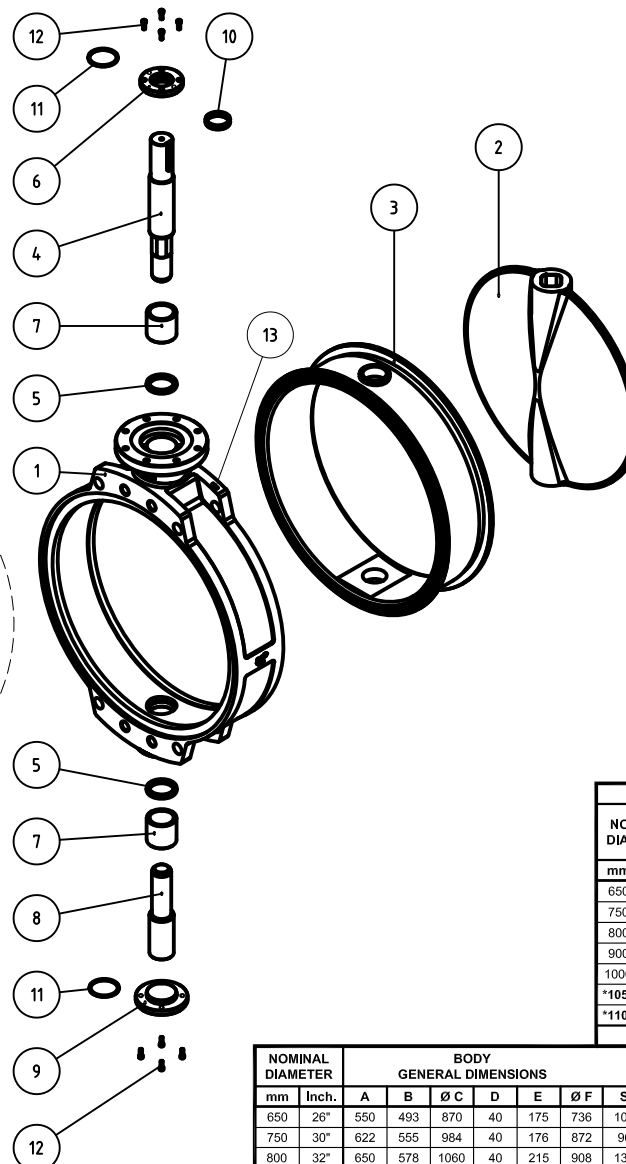
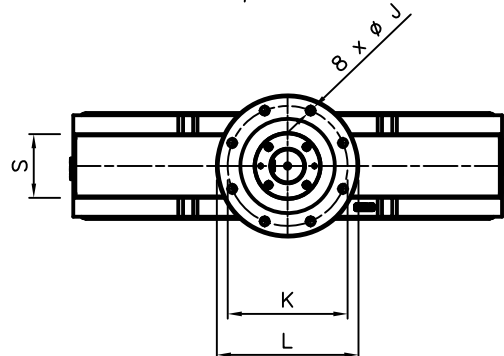
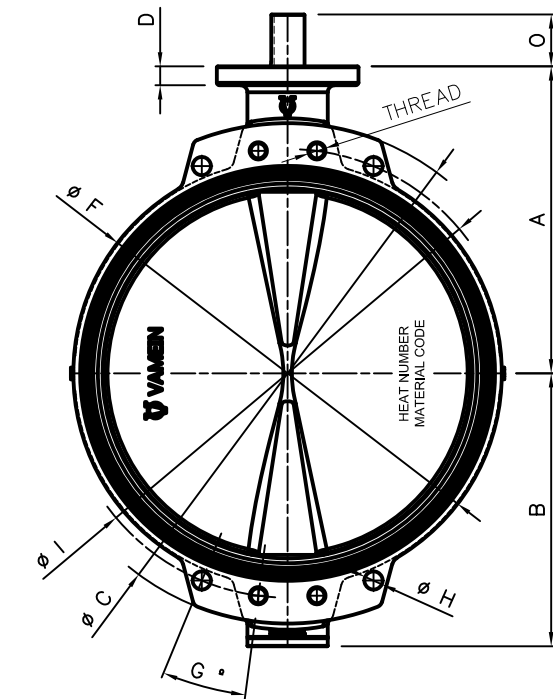




(*): SPECIAL CONSTRUCTION VALVE.
ASK FOR AVAILABILITY.
SEAT VULCANIZED TO THE BODY.

VALVES DN 600/700/1200
SEE DRAWING W-004

POS.	QTY.	DENOMINATION	MATERIAL
1	1	BODY	AS PER ORDER
2	1	DISC	AS PER ORDER
3	1	SEAT	AS PER ORDER
4	1	UPPER SHAFT	STAINLESS STEEL
5	2	"CHEVRON" SHAFT SEAL	BUNA-N
6	1	UPPER COVER	STEEL
7	2	BUSHING	BRONZE
8	1	LOWER SHAFT	STAINLESS STEEL
9	1	LOWER COVER	STEEL
10	2	O-RING	BUNA-N
11	2	O-RING	BUNA-N
12	8	COVERS BOLT (DIN - 912)	STAINLESS STEEL
13	1	LABEL WITH FEATURES	PVC

DRILLING STANDARDS													
NOMINAL DIAMETER		EN 1092-1&2 PN10				EN 1092-1&2 PN16				24" - ASME B 16.5 150 Lbs. ≥ 26" - ASME B16.47 150 Lbs. SERIES A			
mm	Inch.	THREAD	G °	Ø H	Ø I	THREAD	G °	Ø H	Ø I	THREAD	G °	Ø H	Ø I
650	26"									1 1/4" UNE x 45	15	35	806,5
750	30"									1 1/4" UNE x 30	12,86	35	914,4
800	32"	M30 x 45	15	33	950	M36 x 55	15	39	950	1 1/2" UNE x 60	12,86	41,2	977,9
900	36"	M30 x 45	12,86	33	1050	M36 x 55	12,86	39	1050	1 1/2" UNE x 55	11,25	41,2	1085,9
1000	40"	M33 x 50	12,86	36	1160	M39 x 60	12,86	42	1170	1 1/2" UNE x 60	10	41,2	1200,2
*1050	42"									1 1/2" UNE x 60	10	41,2	1257,3
*1100	44"									1 1/2" UNE x 60	9	41,2	1314,5

ANY OTHER STANDARD ON REQUEST

NOMINAL DIAMETER		BODY GENERAL DIMENSIONS							ACTUATORS ASSEMBLY ACCORDNG TO ISO-5211										WEIGHT (Kg)	"Q"	TORQUE AT 10 bar (Nm)
									ASSEMBLY FLANGE					SHAFT END							
mm	Inch.	A	B	Ø C	D	E	Ø F	S	TYPE	Ø J	K	L	Ø M	N	O	Ø R	U	V			
650	26"	550	493	870	40	175	736	106	F-25	17	254	300	200	5	110	72	20	7.4	250	624	4800
750	30"	622	555	984	40	176	872	96	F-25	17	254	300	200	5	110	72	20	7.4	386	739	6500
800	32"	650	578	1060	40	215	908	135	F-25	17	254	300	200	5	110	72	20	7.4	516	759	8100
900	36"	707	643	1168	40	246	1004	166	F-25	17	254	300	200	5	110	98	28	9.9	627	855	10000
1000	40"	755	729	1255	40	280	1114	190	F-25	17	254	300	200	5	110	98	28	9.9	829	962	13500
*1050	42"	781	755	1346	40	280	1196	190	F-25	17	254	300	200	5	110	98	28	9.9	1034	1011	14200
*1100	44"	800	774	1403	40	280	1220	176	F-25	17	254	300	200	5	110	98	28	9.9	1150	1050	15000

	VAMEIN de España, S.R.L.	SET: BUTTERFLY VALVE 100 SERIES DN 650/750/800/900/1000 (26"/30"/32"/36"/40")							DESIGNED BY: J.J.G.		
		DENOMINATION: WAFER TYPE					REF.: S.100-E/04		CHECKED BY: A.S.M.		
		DRAWING NUMBER: W-004		REV.: 00	DATE: 17-11-15		SCALE: —	ACTUATOR: BARE SHAFT		WEIGHT (Lbs.): SEE TABLE	
										APPROVED BY: V.A.G.	

Bench marks in mm VAMEIN DE ESPAÑA, SA. reserves the right to make changes without notice.