

Escavatore cingolato **ZE55GU**






ZOOMLION

Escavatore cingolato

ZE55GU

	Progetto	ZE55GU
Parametri di base	Peso di lavoro	5800 kg
	Capacità benna standard (gamma)	0.16 m³
	Velocità di oscillazione	10 r/min
	Velocità di movimento (alta/bassa)	4.0/2.2 km/h
	Massima trazione	48 kN
	Forza di scavo della benna	44 kN
	Forza di scavo dell'avambraccio	28 kN
Motore	Produttore del motore	Kubota
	Modello del motore	V2607
	Potenza nominale	35.5 kW / 2200 rpm
	Dislocamento	2.615 L
	Standard di emissione	EU Stage V / Tier 4F
Dimensioni	Lunghezza totale	5500 mm
	Larghezza totale	1960 mm
	Altezza totale	2550 mm
	Lunghezza del braccio	2850 mm
	Lunghezza della benna	1570 mm
	Raggio di sterzata della coda	1065 mm
	Scartamento dei cingoli	1560 mm
	Interasse dei cingoli	1990 mm
Gamma di lavoro	Raggio massimo di scavo	6135 mm
	Raggio massimo di scavo sulla terra	5995 mm
	Profondità massima di scavo	3670 mm
	Altezza massima di scavo	5560 mm
	Altezza massima di scarico	3885 mm

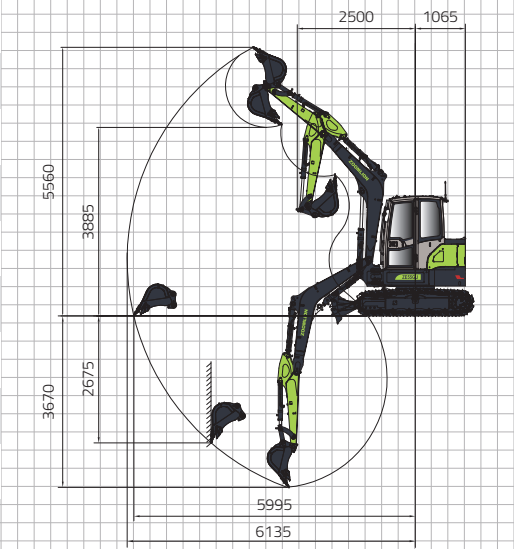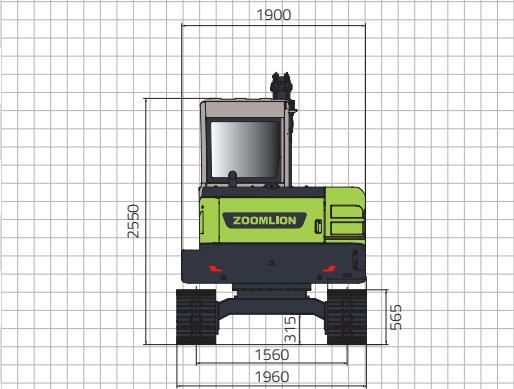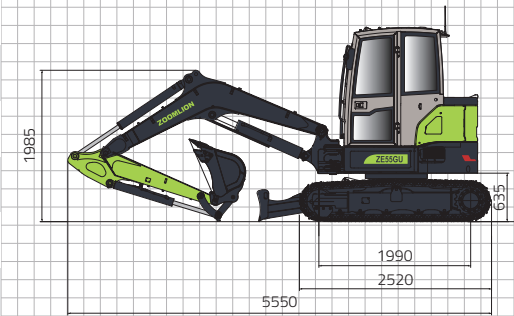

ZOOMLION

Zoomlion Heavy Industry Science & Technology Co.,Ltd.

Add: No.361, South Yinpen Road, Changsha, Hunan Province, P.R.China 410013
Email: earthmoving@zoomlion.com
Copyright©2024 Zoomlion. All rights reserved. Reproduction and copying of any part of contents is not allowed for any purposes without Zoomlion's approval.
Note: Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment.

