



G.T. COMIS

RACCORDERIE EMILIANE

Via Nino Bixio, 12 - 44042 CENTO (FE) • tel. 051 904583 r.a. - fax 051 904243
e-mail gtcomis@gtcomis.it

SCHEMA TECNICA – Technical Sheet

ART. 1007: Valvola a sfera F.F. in 3 pezzi

3 pc. FF AISI 316 ball valve with locking lever

- R E -



Materiale/Material: AISI 316 (1.4401)

Filettatura/Thread: UNI EN 10226-1 (ex iso 7/1)

Certificato/Certificate: EN 10204 3.1

Temperatura di lavoro/Working temperature:
-10° / +150°

Pressione massima nominale/Nominal maximum
pressure: 1000 psi (70 bar); PN64



Codice - Code	Ø	A mm	B mm	C mm	D mm	Conf. - Pack	
1103458	1/2"	15	62	49	100	10	20
1103459	3/4"	20	69	60	112	10	20
1103460	1"	25	79	64	112	2	16
1103461	1 1/4"	32	96	80	145	1	8
1103462	1 1/2"	38	102	83	145	1	6
1103463	2"	50	124	97	165	1	3

Conforme alla normativa PED 2014/68/CE - Comply to PED 2014/68/CE





G.T. COMIS

RACCORDERIE EMILIANE

Via Nino Bixio, 12 - 44042 CENTO (FE) • tel. 051 904583 r.a. - fax 051 904243
e-mail gtcomis@gtcomis.it

SCHEMA TECNICA – Technical Sheet

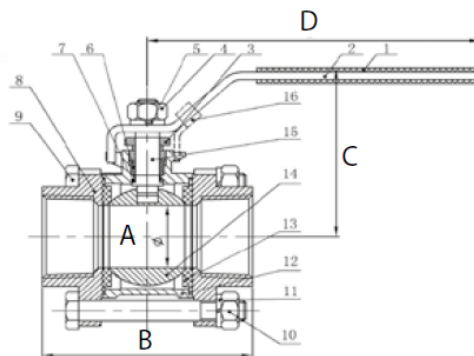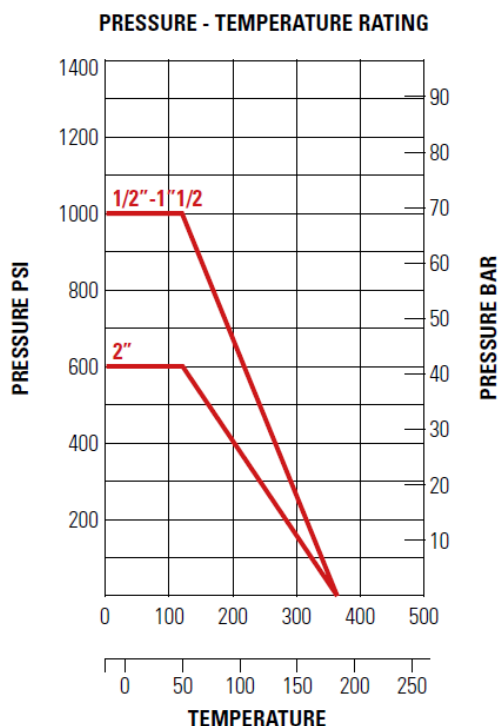

Nr.	Descrizione / Description	Materiale
1	Protezione leva / Plastic cover	P.T.F.E.
2	Leva / Handle	304
3	Pressa treccia / Gland	304
4	Dado leva / Stem nut	304
5	Rondella / Spring washer	304
6	Guarnizione / Gasket	P.T.F.E.
7	Rondella di spinta / Thrust washer	P.T.F.E.
8	Cappuccio / Cap	316
8	Bullone / Bolt	304
9	Dado / Nut	304
10	Rondella / Spring washer	304
11	Corpo / Body	316
12	Anello di sede / Seat	P.T.F.E. + fibra vetro
13	Sfera / Ball	316
14	Stelo / Stem	304
15	Lucchetto / Locking	304
16	Stelo / Stem	304