



G.T. COMIS

RACCORDERIE EMILIANE


Via Nino Bixio, 12 - 44042 CENTO (FE) • tel. 051 904583 r.a. - fax 051 904243
e-mail gtcomis@gtcomis.it

SCHEMA TECNICA – Technical Sheet

ART. 424: Valvola a clapet tenuta gomma NBR

NBR seat clapet valve

FDH

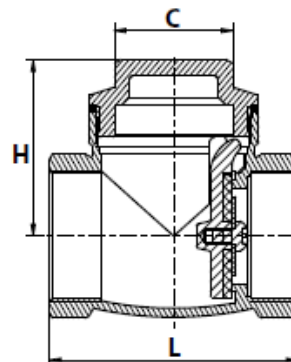

Materiale/Material: Ottone giallo, sigillatura in NBR

/Yellow brass, NBR sealing

Filettatura/Thread: UNI EN ISO 228/1

Normativa/Norm: DM 174 06/04/2004

Temperatura di lavorazione/working temperature: 0°C / +90°C

Codice - Code	Ø	Pressure kg/cm ²	C mm	L mm	H mm	Conf. - Pack ⌘	⊠
2321858	1/2"	16 bar	22,0	48,0	32,8	12	72
2321859	3/4"	16 bar	26,0	52,0	40,5	10	60
2321860	1"	16 bar	26,5	63,0	44,5	8	24
2321861	1 1/4"	16 bar	34,0	74,0	51,5	5	20
2321862	1 1/2"	16 bar	37,0	80,0	53,5	4	16
2321863	2"	16 bar	49,0	98,0	66,0	1	8
2321864	2 1/2"	16 bar	63,0	120,0	80,0	1	5
2321865	3"	16 bar	77,0	135,0	92,0	1	7