



716 in polar white with large TL lites





716 in sandstone with full view sections



716 in charcoal with large windows

COMMERCIAL 700 SERIES

1³/₄" Thick



710 / 712 / 714 / 716 / 732 / 733 /
732-20 / 733-20 / 760 / 763 / 764 /
767 / 768 / 769 / 770 / 771 / 772 /
773 / 774 / 778 / 779 / 780 / 781 /
782 / 787 / 790

////////////////////////////////////

Built to Last

Haas 700 Series commercial insulated steel doors stand up to the elements, while dramatically decreasing exterior noise and enhancing the overall aesthetics of your building at the same time. The 1³/₄" thick 700 Series insulated steel doors help increase energy savings with polyurethane foam cores and are built to last.

700
INSULATED



716 with pass door


700 QUICK GUIDE

Model	Door Thickness	Tested U-Factor	Max. Door Size		End Style Type	Section Skins		Color Options	Window Options
			Width	Height		Inside	Outside		
✓ 710	1-3/4" (44.5mm)	0.093	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel	All except Bi-Directionals	RP, SP, DP, CP, LP, TL
✓ 712	1-3/4" (44.5mm)	0.093	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Woodgrain Steel	All except Plank or Bi-Directionals	SP, DP, CP, TL
✓ 714	1-3/4" (44.5mm)	0.093	38'-2"	32'-0"	16 GA Steel	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel	All except Bi-Directionals	TL
✓ 716	1-3/4" (44.5mm)	0.093	38'-2"	32'-0"	16 GA Steel	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Woodgrain Steel	All except Plank or Bi-Directionals	TL
✓ 732	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	16 GA Steel	26 GA V-Groove Woodgrain Steel	20 GA Flush Smooth Steel	Polar White and Brown	TL
✓ 732-20	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	16 GA Steel	20 GA V-Groove Smooth Steel	20 GA Flush Smooth Steel	Polar White and Brown	TL
✓ 733	1-3/4" (44.5mm)	0.093	38'-2"	32'-0"	16 GA Steel	26 GA V-Groove Woodgrain Steel	20 GA V-Groove Smooth Steel	Polar White and Brown	TL
✓ 733-20	1-3/4" (44.5mm)	0.093	38'-2"	32'-0"	16 GA Steel	20 GA V-Groove Smooth Steel	20 GA V-Groove Smooth Steel	Polar White and Brown	TL
✓ 760	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Short Panel Woodgrain Steel	All except Plank	CP
✓ 761	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Short Panel Woodgrain Steel	All except Plank	CP
✓ 763	1-3/4" (44.5mm)	0.093	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Long Panel Woodgrain Steel	All except Plank	CP
✓ 764	1-3/4" (44.5mm)	0.093	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Long Panel Woodgrain Steel	All except Plank	CP
✓ 767	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ranch Panel Woodgrain Steel	All except Plank	CP
✓ 768	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Standard Panel Woodgrain Steel	All except Plank	CP
✓ 769	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Sculptured Panel Woodgrain Steel	All except Plank	CP
✓ 770	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ranch Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 771	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Short Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 772	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Short Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 773	1-3/4" (44.5mm)	0.093	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Long Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 774	1-3/4" (44.5mm)	0.093	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Long Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 778	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Standard Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 779	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Sculptured Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 780	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Standard Panel Woodgrain Steel	All except Plank or Bi-Directionals	RP
✓ 781	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Short Panel Woodgrain Steel	All except Plank or Bi-Directionals	RP
✓ 782	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Short Panel Woodgrain Steel	All except Plank or Bi-Directionals	RP
✓ 787	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ranch Panel Woodgrain Steel	All except Plank or Bi-Directionals	RP
✓ 790	1-3/4" (44.5mm)	0.093	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Sculptured Panel Woodgrain Steel	All except Plank or Bi-Directionals	RP


RP = Standard SP = SlimLine DP = Double SlimLine CP = Carriage House LP = Ranch TL = TL Lites

Note: Certain weights and/or applications may limit the size allowed.


DOOR PANELS




Flush Woodgrain Panel
Model 710, Model 714

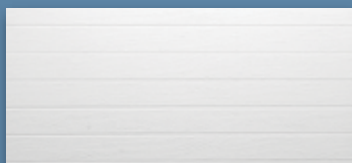

V-Groove Woodgrain Panel
Model 712, Model 716

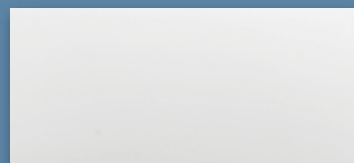


Flush Smooth Panel
Model 732, Model 732-20




V-Groove Smooth Panel
Model 733, Model 733-20




Ribbed Short Woodgrain Panel
Model 760, Model 772, Model 782

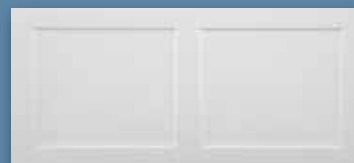


Recessed Short Woodgrain Panel
Model 761, Model 771, Model 781



Ribbed Long Woodgrain Panel
Model 764, Model 774

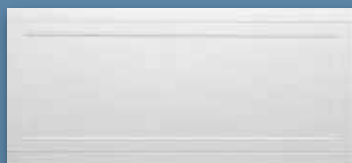

Recessed Long Woodgrain Panel
Model 763, Model 773

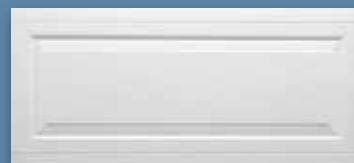

Raised Ranch Woodgrain Panel
Model 770, Model 767, Model 787



Raised Standard Woodgrain Panel
Model 780, Model 768, Model 778



Raised Sculptured Woodgrain Panel
Model 790, Model 769, Model 779



A **Full Thermal Break** is used in the tongue-and-groove construction of all 700 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.

OPTIONS

700 Series Available Options

- 2" or 3" Track
- Double Steel End Stiles
- Exhaust Port
- Cam Safety Device
- Spring Bumpers
- Chain Hoist
- Operators
- High Cycle Springs
- Glazing (lites)
- High Cycle Rollers
- Aluminum Full View Section
- Pass Door
- Top Header Seal
- Keyed Lock
- Wind Load Rating
- ASTM E 84 Fire Rated

Optional Exhaust Port (interior view)



Pass Door (exterior view)



Wind Load

(Convenience only, not a legal exit, or ADA compliant. Door trim color is only available in clear anodized. Available in doors up to 16'2" wide, 16' high. Not available in all models.)