





2016 in bronze with full view lites



2016 in brown with pass door

COMMERCIAL 2000 SERIES

2" Thick



2010 / 2012 / 2014 / 2016 / 2032 /
2033 / 2032-20 / 2033-20 / 2060 /
2061 / 2063 / 2064 / 2067 / 2068 /
2069 / 2070 / 2071 / 2072 / 2073 /
2074 / 2078 / 2079 / 2080 / 2081 /
2082 / 2087 / 2090

////////////////////

2000 The Strength To Keep Out Noise and Weather

Haas 2000 Series commercial insulated steel doors are manufactured with the elements in mind. They will enhance the beauty of your building while insulating and dampening outside noise at the same time. Choosing low U-Factor sectional doors will help increase energy efficiency and savings. Polyurethane insulation provides the lowest U-Factor available in sectional steel doors.

2000 series doors are reinforced with roll-formed galvanized steel struts and double-end hinges, as required to meet wind load specifications and to comply with ANSI/DASMA 102-2004. The protective coating system is found on both the interior and exterior steel.




2032 in polar white with large TL lites

2000 QUICK GUIDE


Model	Door Thickness	Tested U-Factor	Max. Door Size		End Style Type	Section Skins		Color Options	Window Options
			Width	Height		Inside	Outside		
✓ 2010	2" (50.8mm)	0.094	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Flush Panel Woodgrain Steel	All except Bi-Directionals	RP, SP, DP, CP, LP, TL
✓ 2012	2" (50.8mm)	0.094	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Panel Woodgrain Steel	All except Plank or Bi-Directionals	SP, DP, CP, TL
✓ 2014	2" (50.8mm)	0.094	38'-2"	32'-0"	16 GA Steel	26 GA V-Groove Woodgrain Steel	26 GA Flush Panel Woodgrain Steel	All except Bi-Directionals	TL
✓ 2016	2" (50.8mm)	0.094	38'-2"	32'-0"	16 GA Steel	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Panel Woodgrain Steel	All except Plank or Bi-Directionals	TL
✓ 2032	2" (50.8mm)	0.094	24'-2"	32'-0"	16 GA Steel	26 GA V-Groove Woodgrain Steel	20 GA Flush Panel Smooth Steel	Polar White and Brown	TL
✓ 2032-20	2" (50.8mm)	0.094	24'-2"	32'-0"	16 GA Steel	20 GA V-Groove Smooth Steel	20 GA Flush Panel Smooth Steel	Polar White and Brown	TL
✓ 2033	2" (50.8mm)	0.094	38'-2"	32'-0"	16 GA Steel	26 GA V-Groove Woodgrain Steel	20 GA V-Groove Panel Smooth Steel	Polar White and Brown	TL
✓ 2033-20	2" (50.8mm)	0.094	38'-2"	32'-0"	16 GA Steel	20 GA V-Groove Smooth Steel	20 GA V-Groove Panel Smooth Steel	Polar White and Brown	TL
✓ 2060	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Short Panel Woodgrain Steel	All except Plank	CP
✓ 2061	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Short Panel Woodgrain Steel	All except Plank	CP
✓ 2063	2" (50.8mm)	0.094	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Long Panel Woodgrain Steel	All except Plank	CP
✓ 2064	2" (50.8mm)	0.094	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Long Panel Woodgrain Steel	All except Plank	CP
✓ 2067	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ranch Panel Woodgrain Steel	All except Plank	CP
✓ 2068	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Standard Panel Woodgrain Steel	All except Plank	CP
✓ 2069	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Sculptured Panel Woodgrain Steel	All except Plank	CP
✓ 2070	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ranch Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 2071	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Short Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 2072	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Short Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 2073	2" (50.8mm)	0.094	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Long Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 2074	2" (50.8mm)	0.094	18'-2"	16'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Long Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 2078	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Standard Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 2079	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Sculptured Panel Woodgrain Steel	All except Plank or Bi-Directionals	LP
✓ 2080	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Standard Panel Woodgrain Steel	All except Plank or Bi-Directionals	RP
✓ 2081	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Recessed Short Panel Woodgrain Steel	All except Plank or Bi-Directionals	RP
✓ 2082	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ribbed Short Panel Woodgrain Steel	All except Plank or Bi-Directionals	RP
✓ 2087	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Ranch Panel Woodgrain Steel	All except Plank or Bi-Directionals	RP
✓ 2090	2" (50.8mm)	0.094	24'-2"	32'-0"	Extruded End Cap	26 GA V-Groove Woodgrain Steel	26 GA Sculptured Panel Woodgrain Steel	All except Plank or Bi-Directionals	RP

RP = Standard SP = SlimLine DP = Double SlimLine CP = Carriage House LP = Ranch TL = TL Lites
 Note: Certain weights and/or applications may limit the size allowed.


DOOR PANELS




Flush Woodgrain Panel
Model 2010, Model 2014

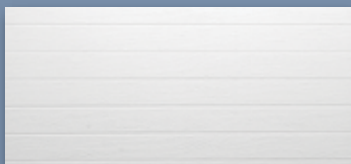

V-Groove Woodgrain Panel
Model 2012, Model 2016

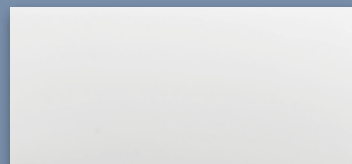


Flush Smooth Panel
Model 2032, Model 2032-20




V-Groove Smooth Panel
Model 2033, Model 2033-20




Ribbed Short Woodgrain Panel
Model 2060, Model 2072, Model 2082

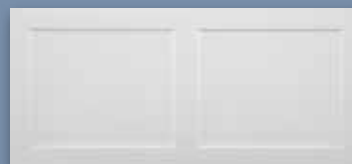


Recessed Short Woodgrain Panel
Model 2061, Model 2071, Model 2081



Recessed Long Woodgrain Panel
Model 2063, Model 2073

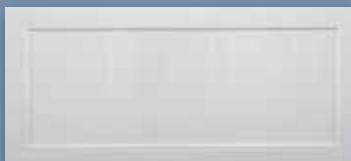

Ribbed Long Woodgrain Panel
Model 2064, Model 2074

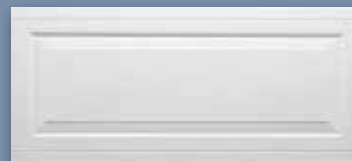


Raised Ranch Woodgrain Panel
Model 2070, Model 2067, Model 2087



Raised Standard Woodgrain Panel
Model 2080, Model 2068, Model 2078



Raised Sculptured Woodgrain Panel
Model 2090, Model 2069, Model 2079



A **Full Thermal Break** is used in the tongue-and-groove construction of all 2000 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.

2000 series doors include **Air Infiltration Seals**, which exceed the ASHRAE 90.1 Standard when installed with standard bottom seal and commonly available rigid/flexible vinyl door stop.

OPTIONS

2000 Series Available Options

2" or 3" Track
Double Steel End Stiles
Exhaust Port
Cam Safety Device
Spring Bumpers
Chain Hoist
Operators
High Cycle Springs

Optional Exhaust Port
(interior view)



Glazing (lites)
High Cycle Rollers
Aluminum Full View Section
Pass Door
Keyed Lock
Wind Load Rating
ASTM E 84 Fire Rated

Pass Door
(interior view)



(Convenience only, not a legal exit, or ADA compliant. Door trim color is only available in clear anodized. Available in doors up to 16'2" wide, 16' high. Not available in all models.)